

orange™

USER GUIDE

Modem Technicolor TC7200



technicolor

Safety Instructions

Using equipment safely

Your Cable Modem Gateway product has been manufactured to meet European and local safety standards, but you must take care if you want it to perform properly and safely.

It is important that you read this booklet completely, especially the safety instructions below.

Equipment connected to the protective earth of the building installation through the mains connection or through other equipment with a connection to protective earth and to a cable distribution system using coaxial cable, may in some circumstances create fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11).

If you have any doubts about the installation, operation or safety of the product, please contact your supplier.

To avoid the risk of electric shock

- Disconnect the Cable Modem Gateway product from the mains supply before you connect it to (or disconnect it from) any other equipments. Remember that contact with Mains can be lethal or causes severe electric shock.
- Never remove the product cover. Should the product fail, contact the Customer Service to arrange repair or service.
- Never allow anyone to push anything into holes, slots or any other opening in the case
- Do not block the ventilation slots; never stand it on soft furnishings or carpets
- Do not put anything on it which might spill or drip into it (e.g. Lighted candles or containers of liquids). Do not expose it to dripping or splashing. If an object or liquid enters inside the Cable Modem, unplug it immediately and contact the Customer Service.
- Do not store the Cable Modem Gateway product in excessively hot, cold or damp conditions. It is intended to operate at an ambient temperature of less than 35 degrees Celsius and a maximum humidity level of 70%. In case of a storm, it is recommended that you unplug the product from the mains and from the PC set or other equipment.
- Leave the mains socket accessible so that you can unplug the set quickly
- Telephone jacks Line 1 and Line 2 must not be connected to outside wiring.

Connecting to the mains supply

- This appliance is designed to operate in the rated voltage 110 ~ 240 VAC.
- If you are in any doubt about the mains lead, the plug or connection, please consult the Customer Service.
- Only the power adapter supplied with the product has to be used.

Ensuring optimum performance

- Leave 7cm to 10cm around the appliance to ensure that proper ventilation gets to it.
- Do not store your appliance on its side (if not allowed)
- To clean the appliance, use a dry, clean soft cloth with no cleaning solvent or abrasive products. Clean the ventilation openings regularly.

Limiting the Human Body Exposure to the Electromagnetic Fields

Under normal use condition the user shall keep at least 20cm distance from the Cable Modem Gateway product.

Environmental considerations

This symbol means that your inoperative electronic appliance, and used battery when applicable, must be collected separately and not mixed with the household waste. The European Union has implemented a specific collection and recycling system for which producers' are responsible.



This appliance has been designed and manufactured with high quality materials and components that can be recycled and reused. Electrical and electronic appliances are liable to contain parts that are necessary in order for the system to work properly but which can become a health and environmental hazard if they are not handled or disposed of in the proper way. Consequently, please do not throw out your inoperative appliance with the household waste.

If you are the owner of the appliance, you must deposit it at the appropriate local collection point or leave it with the vendor when buying a new appliance.

- If you are a professional user, please follow your supplier's instructions.
- If the appliance is rented to you or left in your care, please contact your service provider

Please help us protect the environment in which we live

Energy savings - You have a role to play...

Learn how you can use and explore ways for using your electronic equipment



The user manual detailed useful information on all the features of your product but also on energy consumption performances.

We strongly encourage you to carefully read the notice before putting your equipment in service to get the best service it can offer you.

By working together, we can reduce the impact we have on our earth!

Main technical specifications

General

Operating voltage	100 ~ 240 VAC
Typical Power consumption	18 W max
Dimensions (W x H x D)	220mm x 166.7mm x 43mm
Operating temperature range	0 – 40 °C
Storage temperature range	-20 – 70 °C
AC adapter (or plug-in adapter) type	ADAPTER 18W, 12VDV/1.5A

Connections

DC input	12V/ 1.5A
Cable input	1xCoaxial cable connector
USB input	1x 2.0 USB connector
Phone plugs	2xRJ11
Ethernet plugs	4xRJ-45

Marking information



This symbol on your set guarantees that your product complies with the European Directive 1999/5/EC on Safety, Telecom, Electromagnetic Compatibility, with the 2009/125/EC Directive on Energy related Products and the Directive 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment. This equipment is intended to be used indoor in a residential or office environment. This equipment may be operating in Europe

The CE Declaration of Conformity is available on the Website www.technicolor.com

Responsible Party:

Technicolor R&D France
975, Avenue des Champs Blancs CS17616
35576 Cesson-Sévigné Cedex
France

Chapter 1: Connections and Setup.....	7
Turning on the Wireless Voice Gateway.....	7
Introduction.....	7
Wireless Voice Gateway Features	7
What's on the CD-ROM	9
Computer Requirements	9
Wireless Voice Gateway Overview.....	10
Front Panel	10
Rear Panel.....	12
Wall Mounting	13
Relationship among the Devices.....	14
What the Modem Does	14
What the Modem Needs to Do Its Job.....	14
Contact Your Local Cable Company.....	15
Connecting the Wireless Voice Gateway to a Single Computer.....	15
Attaching the Cable TV Wire to the Wireless Voice Gateway	16
Installation procedure for connecting to the Ethernet interface	17
Telephone or Fax Connection	18
Chapter 2: WEB Configuration.....	19
Accessing the Web Configuration	19
Outline of Web Manager	20
Warning message to change the password.....	21
Gateway – Status Web Page Group.....	22
1. Software.....	22
2. Connection.....	23
3. Password	24
4. Diagnostics	26
5. Event Log.....	27
6. Initial Scan	28
7. Backup/Restore	29
Gateway – Network Web Page Group	30
1. LAN.....	30
2. WAN	31
3. Computers	32
4. DDNS.....	33
5. Time	34
6. FTP Diagnostics.....	35
7. Port-base Passthrough	36
Gateway – Advanced Web Page Group.....	37

1. Options	37
2. IP Filterng.....	39
3. MAC Filtering	40
4. Port Filtering.....	41
5. Forwarding	42
6. Port Triggers	44
7. DMZ Host.....	46
8. RIP Setup.....	47
Gateway – Firewall	48
1. Web Filter.....	48
2. TOD Filter	49
3. Local Log	50
4. Remote Log	51
Gateway – Parental Control Web Page Group	52
1. Basic.....	52
Gateway – Wireless Web Page Group.....	53
1. Radio	54
2. Primary Network	56
3. Access Control	61
4. Advanced.....	62
5. Bridging.....	64
6. 802.11e QoS (WMM) Settings.....	65
Gateway – USB Web Page Group	66
1. USB Basic settings.....	66
2. Approved Devices settings	67
3. Storage Basic.....	68
3. Storage Advanced.....	69
3. Media Server.....	70
VoIP – Basic Web Page Group	71
1. Basic LAN	71
2. Hardware Info	72
3. Event Log.....	73
4. CM State	74
Chapter 3: Networking.....	75
Communications	75
Type of Communication	75
Cable Modem (CM) Section.....	76
Networking Section	76
Three Networking Modes	76

Cable Modem (CM) Mode.....	77
Residential Gateway (RG) Mode.....	78
Chapter 4: Additional Information	80
Frequently Asked Questions	80
General Troubleshooting.....	82
Service Information	83
Glossary	84

CHAPTER 1: CONNECTIONS AND SETUP

Turning on the Wireless Voice Gateway

After installing the Wireless Voice Gateway and turn it on for the first time (and each time the modem is reconnected to the power), it goes through several steps before it can be used. Each of these steps is represented by a different pattern of flashing lights on the front of the modem.

If there is no lighted LEDs on the front panel, check the power adapter plug-in the power jack and connect to CM correctly.

Note: All indicators flash once before the initialization sequence.

If both DS and US LEDs are flashing, it means the Wireless Voice Gateway is automatically updating its system software. Please wait for the lights to stop flashing. Do not remove the power supply or reset the Wireless Voice Gateway during this process.

Introduction

Wireless Voice Gateway Features

- Full Band Capture Front End
- Increases performance with 50% increase in CPU speed.
- Adds Applications CPU to run Linux applications.
- Enables concurrent dual band Wi-Fi with 1 PCIe.
- Lowers Power with Advanced Power Management
- Advanced Processor architecture.
- High-Speed Memory architecture.
- Integrated IPTV solution.
- Excentis Euro-DOCSIS 1.0/1.1/2.0/3.0 Standard Compliant.
- Euro-PacketCable 1.0/1.5 Standard Compliant
- Support Multiple Provisioning mode.
- Standard RJ-45 connector for 10/100/1000BaseT Ethernet with auto-negotiation and MDIX functions; Support maximum Ethernet cable length up to 100m (Category 5).
- RJ-11 Foreign Exchange Station (FXS) port for IP telephony; Support a maximum line length between themselves and an end-receiver (handset, etc.) of up to 500 feet (AWG 26/0.4mm).
- Support simultaneous voice and data communications.
- One voice conversations in the FXS port with different CODEC:
G.711- ulaw, G.711- alaw, G.723.1, BV16, ILBC, G.726- 16, G.726- 24, G.726- 32, G.726- 40,
G.728, G.729, G.729E, G.729A, G.729B, TELEVENT, T.38
- Default codecs: G.711- ulaw, G.711- alaw, BV16, ILBC, TELEVENT, T.38
- Echo Cancellation.
- Voice Active Detection (VAD).
- DTMF detection and generation.
- Comfort Noise Generation (CNG).
- Support V.90 fax and modem services.
- 56 bits DES and 128 bits AES data encryption security.
- SNMP network management support.
- 802.11a/b/g/n supported, 20/40 MHz bandwidth, 300Mbps Maximum data rate.
- BCM43228 support both 2.4 GHz and 5 GHz.
- Support Web pages and private DHCP server for status monitoring.
- The NTP (Network Termination Point) should be able to operate with an LF (Loading Factors) of at least 100 LU.

- Propane™ technology supported, enabling the connection of more Internet users without additional network bandwidth.
- Plug and Play.

What's on the CD-ROM

Insert the Wireless Voice Gateway CD-ROM into your CD-ROM drive to view troubleshooting tips, the internal diagnostics, and other valuable information.

CD-ROM Contents:

- Electronic copy of this user's guide in additional languages (PDF format)
- Adobe Acrobat Reader — application you can load to read PDF format, if you don't have it loaded already
- Links to Technicolor web site

Euro-DOCSIS and Euro-PacketCable are trademarks of Cable Television Laboratories, Inc.

Computer Requirements

For the best possible performance from your Wireless Voice Gateway, your personal computer must meet the following minimum system requirements (note that the minimum requirements may vary by cable companies):

	IBM PC COMPATIBLE	MACINTOSH**
CPU	Pentium preferred	PowerPC or higher
System RAM	16MB (32MB preferred)	24MB (32MB preferred)
Operating System	Windows* NT / 2000 / Me / XP / Vista / Windows 7, Linux	Mac OS** 7.6.1 or higher
Video	VGA or better (SVGA preferred)	VGA or better (SVGA built-in preferred)
CD-ROM Drive	Required	Required
Ethernet	10BaseT , 100BaseT or 1000BaseT	10BaseT , 100BaseT or 1000BaseT An Ethernet card makes it possible for your computer to pass data to and from the internet. You must have an Ethernet card and software drivers installed in your computer. You will also need a standard Ethernet cable to connect the Ethernet card to your Wireless Voice Gateway.
Software	<ul style="list-style-type: none">• A TCP/IP network protocol for each machine• Microsoft Internet Explorer 4.0 or later or Netscape Navigator 4.0 or later.	

* Windows is a trademark of Microsoft Corporation.

** Macintosh and the Mac OS are trademarks of Apple Computer, Inc.

Wireless Voice Gateway Overview

Front Panel

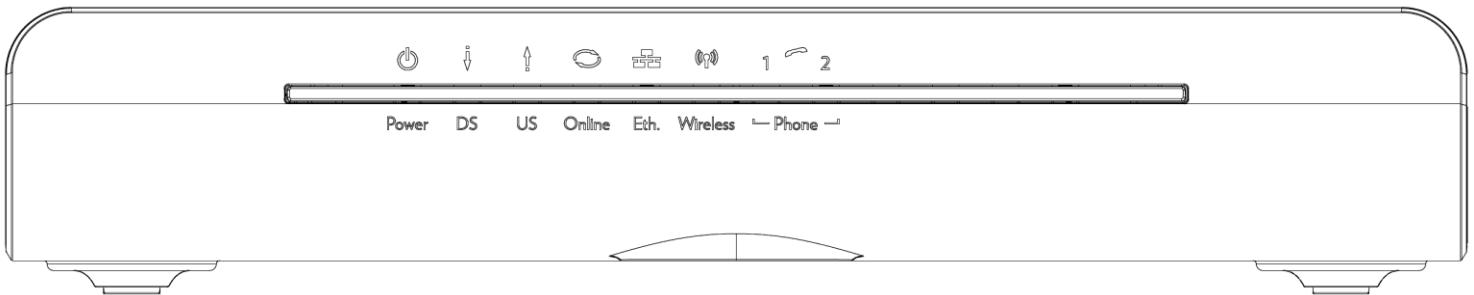


Fig. 1-1 Front Panel

The following illustration shows the front panel:

- **Power** - Indicates the Power status.
- **DS** - Indicates the status of Data reception by the cable modem from the Network (Downstream Traffic).
- **US** - Indicates the status of Data transmission by the cable modem to the Network (Upstream Traffic).
- **Online** - Displays the status of your cable connection. The light is off when no cable connection is detected and fully lit when the modem has established a connection with the network and data can be transferred.
- **Eth.** - Indicates the state of Ethernet ports.
- **Wireless** - Indicates the traffic on the wireless network.
- **Phone** - Indicates the status of the telephone Phone 1 and Phone 2.

The lights on the front panel LEDs are described in the table below (from left to right):
 ON = the LED is light, OFF = the LED is gray, FLASH = the LED is blinking.

TC7200.20	Power	Internet			Eth.	Wireless	Phone 1	Phone 2	Description
		DS	US	Online					
Boot-up Operation	ON	ON	ON	ON	ON	X	ON	ON	Power on 0.25 sec
	ON	0.25 second							
	ON	FLASH	FLASH	FLASH	X	X	X	X	From power ON to system initialization complete
	ON	ON	ON	ON	X	X	X	X	Following system initialization complete to (before) DS scanning
		1 second							
DOCSIS Start-up Operation	ON	FLASH	OFF	OFF	X	X	X	X	During DS scanning and acquiring SYNC
	ON	ON	FLASH	OFF	X	X	X	X	From SYNC completed, receiving UCD to ranging completed
	ON	ON	ON	FLASH	X	X	X	X	During DHCP, configuration file download, registration, and Baseline Privacy initialization: DHCP status: 1 second ON and 1 second OFF, TFTP status: 0.25 second ON and 0.25 second OFF
	ON	ON	ON	ON	X	X	X	X	Operational (NACO=ON)
	ON	FLASH	FLASH	OFF	X	X	X	X	Operational (NACO=OFF)
Channel Bonding Operation	FLASH	FLASH	FLASH	FLASH	FLASH	X	X	X	Wait registration with all DS and all US – Lights Flash sequentially from the right to left Minimum duration 3 seconds
	X	X	X	X	OFF	X	X	X	From 1 to 4 DS, from 1 to 4 LEDs are ON From 5 to 8 DS, From 1 to 4 LEDs are flashing Duration 3 seconds
	OFF	X	X	X	X	X	X	X	From 1 to 4 US, from 1 to 4 LEDs are ON.
	FLASH	FLASH	FLASH	FLASH	FLASH	X	X	X	Wait registration with all DS and all US – Lights Flash sequentially from the left to right
MTA Initialization	ON	ON	ON	ON	X	X	FLASH	OFF	MTA DHCP
	ON	ON	ON	ON	X	X	OFF	FLASH	MTA SNMP/TFTP
	ON	ON	ON	ON	X	X	ON	ON	RSIP for NCS/Register for SIP
CPE Operation	ON	X	X	X	OFF ON FLASH	OFF ON FLASH	X	X	No Ethernet / Wireless Link Ethernet / Wireless Link TX/RX Ethernet / Wireless Traffic
MTA Operation	ON	<CM Normal Operation>					ON	ON	Both Lines On-Hook
	ON						FLASH	ON	Tel1 Off-hook, Tel2 On-hook
	ON						ON	FLASH	Tel1 On-hook, Tel2 Off-hook
	ON						FLASH	FLASH	Both Lines Off-Hook

SW Download Operation	ON	FLASH	FLASH	ON	X	X	X	A software download and while updating the FLASH memory
-----------------------------	----	-------	-------	----	---	---	---	--

Table 1-1 LED behavior

Rear Panel

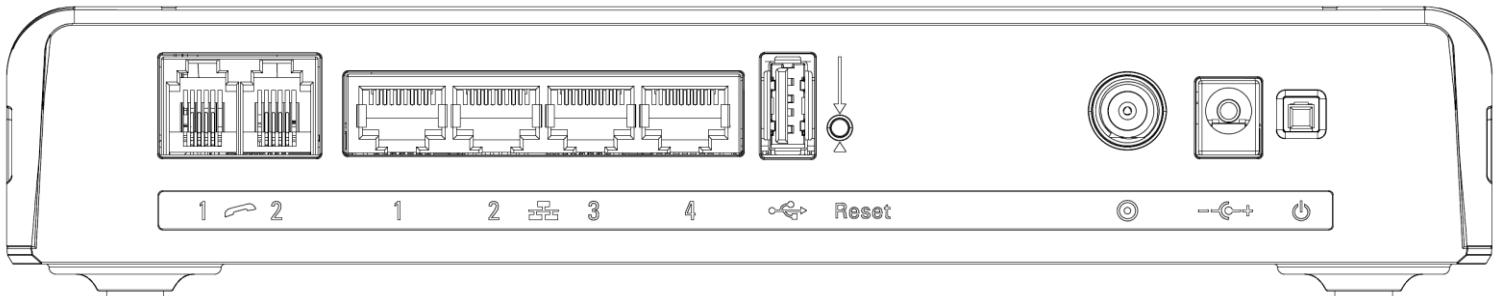


Fig. 1-2 Rear Panel

Connector	Description
Power Switch	Power on, off the Cable modem.
Power Jack	Connector for DC12V.
Cable	Connector for the cable network.
Reset	To restart the modem or press over 5 seconds can default the modem.
USB Host	USB 2.0 connector
Ethernet	4 Gigabit Ethernet ports, RJ-45 connector.
Phone1/ Phone2	2 Phone RJ11 Connectors.

Table 1-2 Rear Panel description

Side Panel for WPS

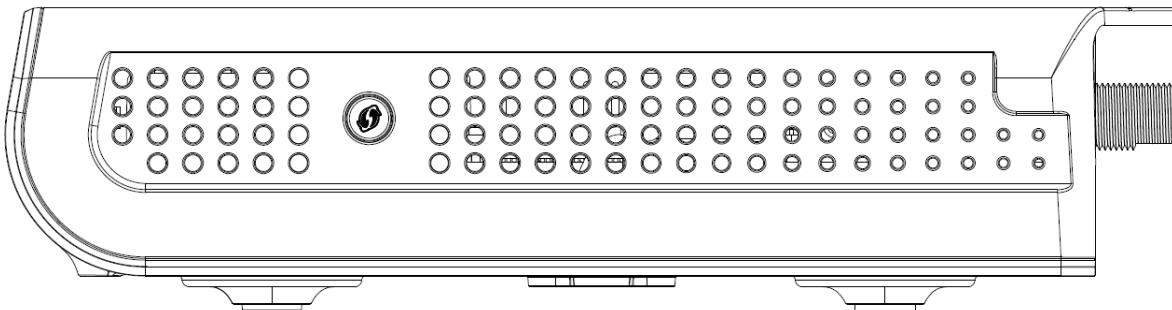


Fig. 1-3 Side Panel

 **WPS** – Indicates the status of the WPS functionality.

WPS button: Wi-Fi Protected Setup™. This button can be used to:

Secure the connection with another device (PC for example) using WPS protocol. A long press (press 2 more seconds) on the button allows you to enable the association of the modem with a PC or other equipment.

After link establish. A short press on the button, switch on/off Wi-Fi.



Wall Mounting

This article will show the user through the process of wall-mounting the Wireless Voice Gateway. The Adapter has two wall-mount slots on its back panel.

Two screws are needed to mount the Adapter.

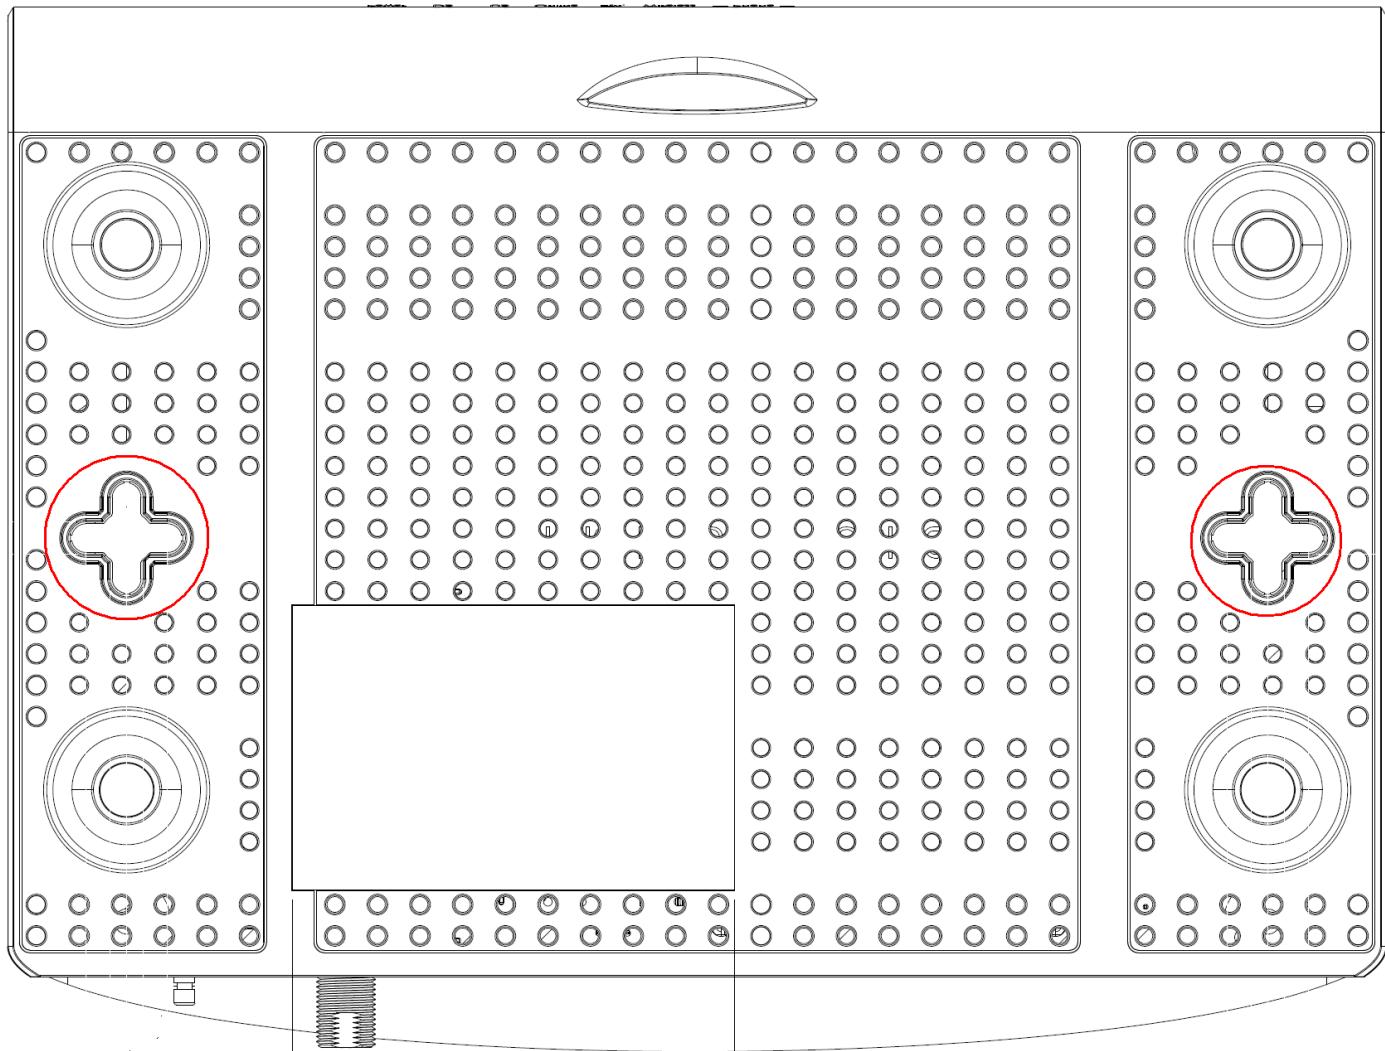


Fig. 1-4 Wall Mounting

To do this:

1. Ensure that the wall you use is smooth, flat, dry and sturdy and use the 2 screw holes which are 101.6 mm (4 inches) apart from each other.
2. Fix the screws into wall, leaving their heads 3 mm (0.12 inch) clear of the wall surface.
3. Remove any connections to the unit and locate it over the screw heads. When in line, gently push the unit on to the wall and move it downwards to secure.

Relationship among the Devices

This illustration shows a cable company that offers DOCSIS/Euro-DOCSIS and PacketCable/Euro-PacketCable compliant voice/data services.

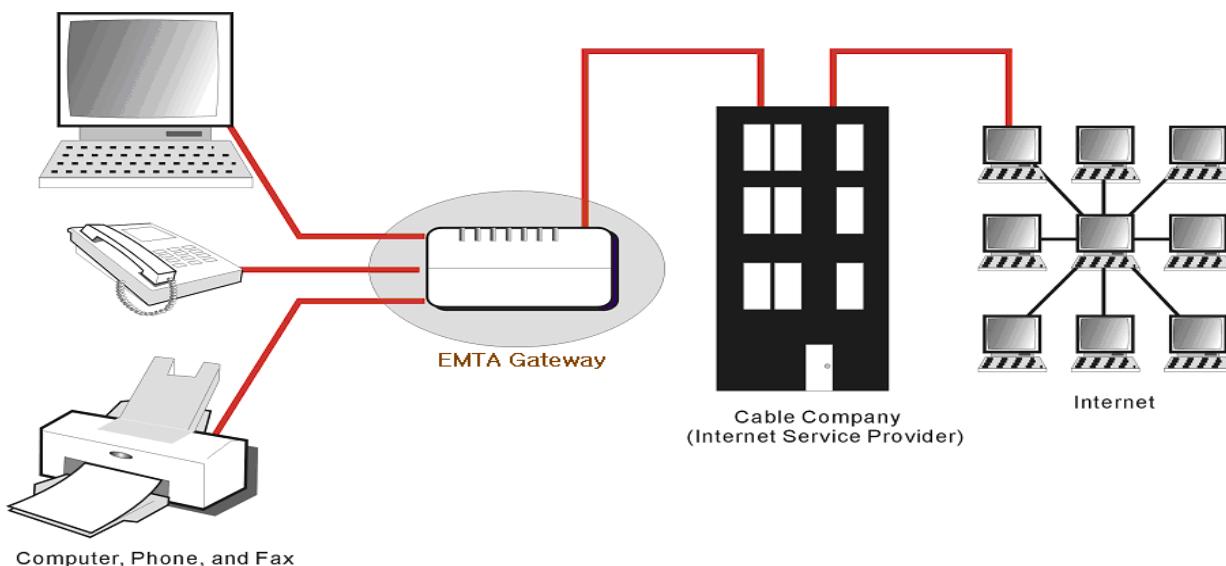


Fig. 1-5 Connection overview

What the Modem Does

The Wireless Voice Gateway provides high-speed Internet access as well as cost-effective, toll-quality telephone voice and fax/modem services over residential, commercial, and education subscribers on public and private networks via an existing CATV infrastructure. It can inter-operate with the PacketCable compliant head-end equipment and provide the IP-based voice communications. The IP traffic can transfer between the Wireless Voice Gateway and DOCSIS/Euro-DOCSIS compliant head-end equipment. The data security secures upstream and downstream communications.

What the Modem Needs to Do Its Job

- **The Right Cable Company:** Make sure your local cable company provides data services that use cable TV industry-standard DOCSIS/Euro-DOCSIS compliant and PacketCable/Euro-PacketCable compliant technology.
- **The Internet/Telephony Service Provider (ISP/TSP):** Your cable company provides you access to an Internet Service Provider (ISP) and Telephony Service Provider (TSP). The ISP is your gateway to the Internet and provides you with a pipeline to access Internet content on the World Wide Web (WWW). The TSP provides you with telephony access to other modems or other telephony services over the Public Switched Telephone Network (PSTN).

Check with your cable company to make sure you have everything you need to begin; they'll know if you need to install special software or re-configure your computer to make your cable internet service work for you.

Contact Your Local Cable Company

You will need to contact your cable company to establish an Internet account before you can use your gateway. You should have the following information ready (which you will find on the sticker on the gateway):

- The serial number
- The model number
- The Cable Modem (CM) Media Access Control (MAC) address
- The Terminal Adapter (EMTA) MAC address
- Security information: Service Set Identifier (SSID), Encryption key / passphrase (WPA2-PSK by default), channel number. Default values are indicated underneath the modem on the sticker.

Please check the following with the cable company

- The cable service to your home supports DOCSIS/Euro-DOCSIS compliant two-way modem access.
- Your internet account has been set up. (The Media Terminal Adapter will provide data service if the cable account is set up but no telephony service is available.)
- You have a cable outlet near your PC and it is ready for Cable Modem service.

Note: It is important to supply power to the modem at all times. Keeping your modem plugged in will keep it connected to the Internet. This means that it will always be ready whenever you need.

Important Information

Your cable company should always be consulted before installing a new cable outlet. Do not attempt any rewiring without contacting your cable company first.

Please verify the following on the Wireless Voice Gateway

The Power LED should be lighted when plug-in the power supply.

Connecting the Wireless Voice Gateway to a Single Computer

This section of the manual explains how to connect your Wireless Voice Gateway to the Ethernet port on your computer and install the necessary software. Please refer to Figure 1-5 to help you connect your Digital Cable Modem for the best possible connection.

Attaching the Cable TV Wire to the Wireless Voice Gateway

1. Locate the Cable TV wire. You may find it one of three ways:
 - a. Connected directly to a TV, a Cable TV converter box, or VCR. The line will be connected to the jack, which should be labeled either IN, CABLE IN, CATV, CATV IN, etc.
 - b. Connected to a wall-mounted cable outlet.
 - c. Coming out from under a baseboard heater or other location. See Figure 1-6 for the wiring example.

Notes: For optimum performance, be sure to connect your Wireless Voice Gateway to the first point the cable enters your home. The splitter must be rated for at least 1GHz.

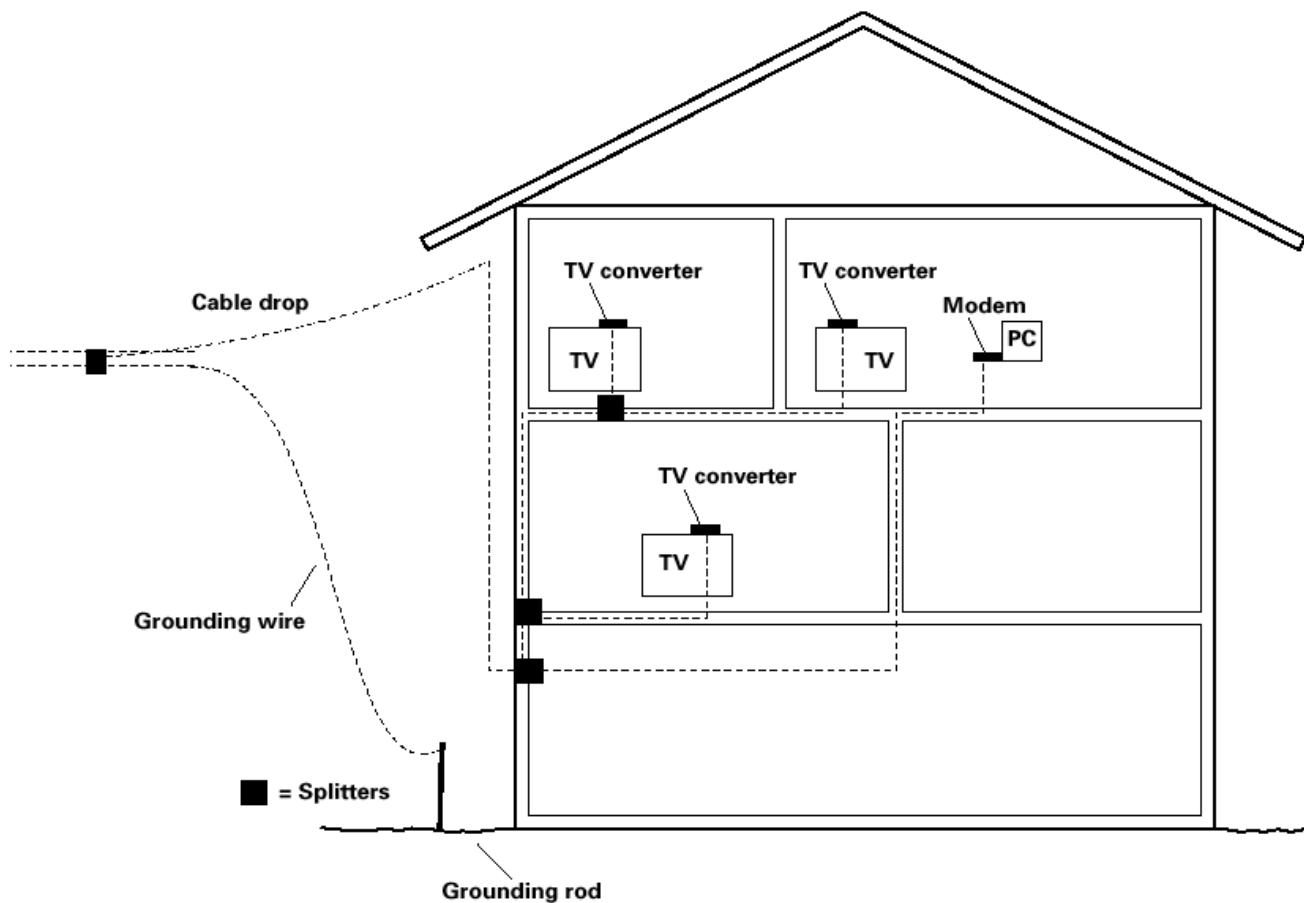


Fig. 1-6 Basic Home Wiring



Installation procedure for connecting to the Ethernet interface

Follow these steps for proper installation.

Plug the coaxial cable to the cable wall outlet and the other end to the modem's cable connector.

Note: To ensure a fast registration of the modem, the coaxial cable must be connected to the modem before it is powered on.

Plug the power supply into the socket of the cable modem and two-pin plug in the AC outlet then press the Power Switch, power on the modem.

Note: Only use the power supply that comes with the modem. Using another power supply can cause damage to the product, and will void the warranty.

Connect an Ethernet cable (direct connection, see below) to the Ethernet port at the back of the computer, and the other end to the ETHERNET port on the rear panel of the cable modem. The modem will seek the appropriate cable signal on the cable television network and go through the initial registration process on its own. The modem is ready for data transfer after the green LED "ONLINE" is lit continuously.

Note: the button "reset" at the back of the modem is used primarily for maintenance.

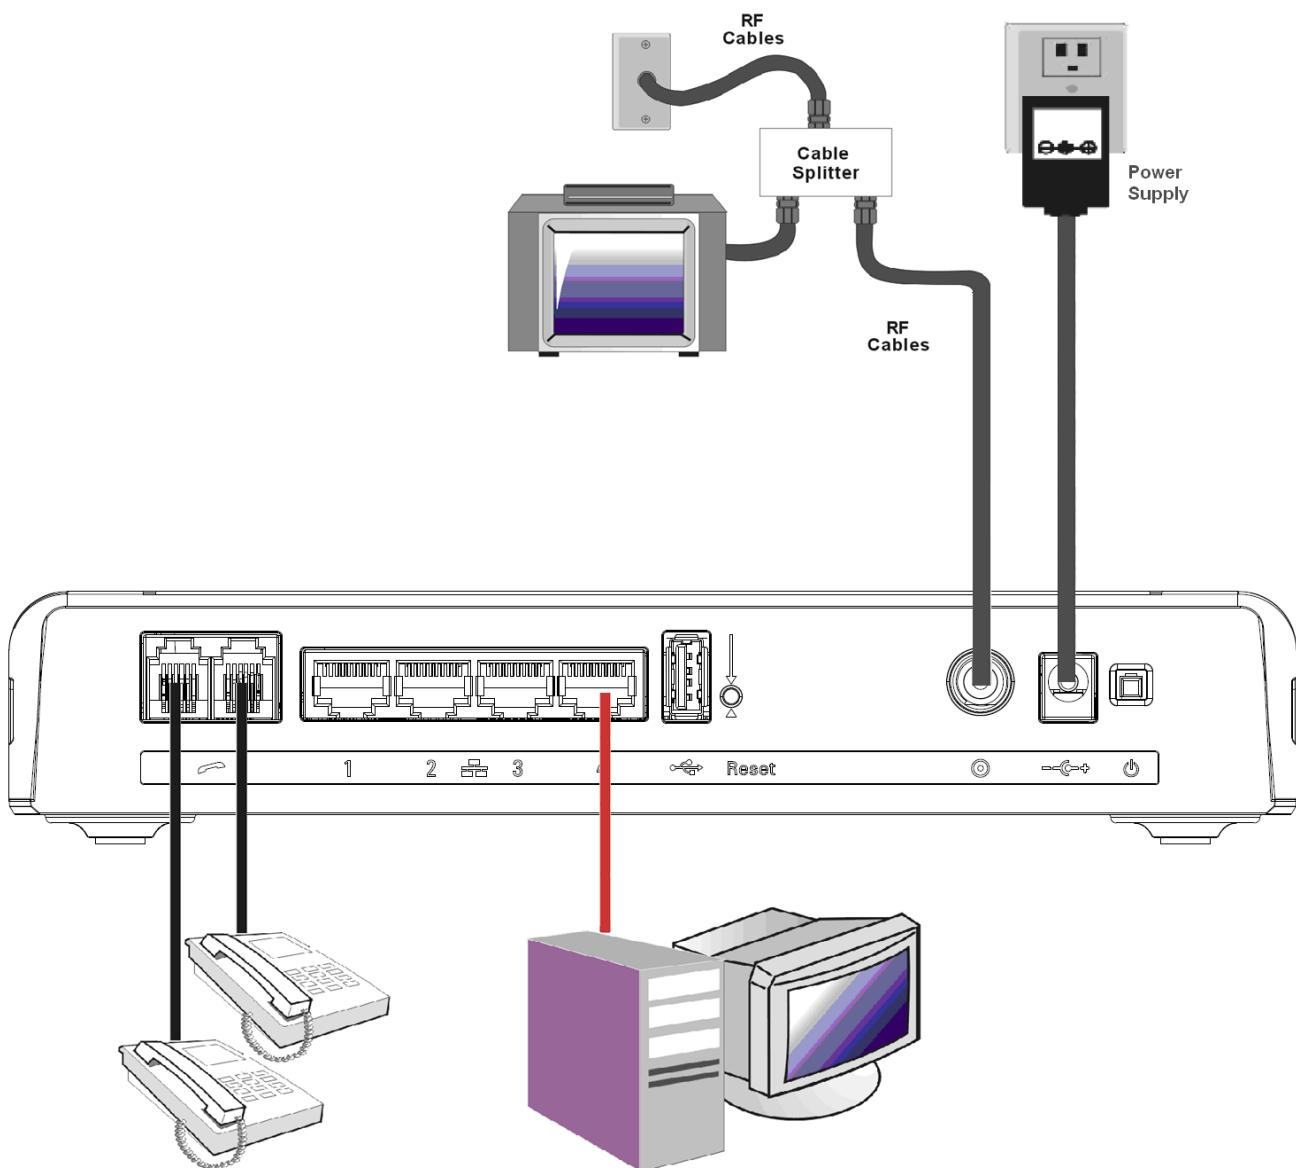


Fig. 1-7 Connect to the Modem

Telephone or Fax Connection

When properly connected, most telephony devices can be used with the Wireless Voice Gateway just as with a conventional telephone service. To make a normal telephone call, pick up the handset; listen for a dial tone, then dial the desired number. For services such as call waiting, use the hook switch (or FLASH button) to change calls. The following procedures describe some of the possible connection schemes for using telephony devices with the Wireless Voice Gateway.

1. Connect a standard phone line cord directly from the phone (fax machine, answering machine, caller ID box, etc.) to one of the LINE jacks on the Wireless Voice Gateway.
2. If there is a phone line in your home which is NOT connected to another telephone service provider, connect a standard phone line cord from a jack on this line to one of the LINE jacks of the Wireless Voice Gateway. Connect a standard phone line cord directly from the phone (fax machine, answering machine, caller ID box, etc.) to one of the other jacks in the house that uses that line.
3. If you have a multi-line telephone, connect a standard phone line cord (not an RJ-14 type line cord) from the phone to the LINE jacks on the Wireless Voice Gateway. (Other phones can be added to each line by using standard phone line splitters.)

CHAPTER 2: WEB CONFIGURATION

To make sure that you can access the Internet successfully, please check the following first.

1. Make sure the connection (through Ethernet) between the Wireless Voice Gateway and your computer is OK.
2. Make sure the TCP/IP protocol is set properly.
3. Subscribe to a Cable Company.

Accessing the Web Configuration

The **Wireless Voice Gateway** offers local management capability through a built-in HTTP server and a number of diagnostic and configuration web pages. You can configure the settings on the web page and apply them to the device.

Once your host PC is properly configured; please proceed as follows:

1. Start your web browser and type the private IP address of the Wireless Voice Gateway on the URL field: **192.168.0.1**
2. After connecting to the device, you will be prompted to enter username and password.
By default, the username is “**admin**” and the password is “**adminpassword**”.



Fig2-1 Login dialogue

If you login successfully, the main page will appear.

Outline of Web Manager

The main screen will be shown as below.

The screenshot shows the Technicolor Web Manager interface. At the top, there's a navigation bar with the 'technicolor' logo, 'Administration' text, and language selection icons (UK and FR). Below the navigation bar is a horizontal menu bar with 'Gateway', 'VoIP', 'Main Menu' (which is highlighted in red), 'Status -', 'Network -', 'Advanced -', 'Firewall -', 'Parental Control -', 'Wireless -', 'USB', and 'Sub Menu'. A vertical sidebar on the left lists several options: Software, Connection, Password, Diagnostics, Event Log, Initial Scan, and Backup/Restore. The 'Software' option is also highlighted in red. The main workspace, enclosed in a red border, is titled 'Status'. It contains two tables: 'Information' and 'Status'. The 'Information' table has the following data:

Standard Specification Compliant	DOCSIS 3.0
Hardware Version	1.0
Software Version	STDD.01.01
Cable Modem MAC Address	00:90:00:11:11:01
Cable Modem Serial Number	
CM Certificate	Not Installed

The 'Status' table has the following data:

System Up Time	0 days 00h:05m:59s
Network Access	Allowed
Cable Modem IP Address	---

At the bottom of the main workspace, the text 'Main Window' is written in red. At the very bottom of the page, there's a copyright notice: '© - Technicolor - 2013'.

Fig. 2-2 Outline of Web Manager

- **Main Menu:** the hyperlinks on the top of the page, including Gateway, VoIP and several sub-menu items
- **Sub Menu:** under the main menu, sub menu use to enter each function, e.g., Status, Network, Firewall...
- **Title:** the sidebar on the left side of the page indicates the title of this management interface, e.g., Software in this example
- **Main Window:** the current workspace of the web management, containing configuration or status information

For easy navigation, the pages are organized in groups with group names main menu. Individual page names within each group are provided in the sub menu and sidebar. So to navigate to a page, click the group hyperlink at the top, then the sub menu for the function, finally choose the title on the sidebar.

Your cable company may not support the reporting of some items of information listed on your gateway's internal web pages. In such cases, the information field appears blank. This is normal.

Warning message to change the password


At your first connection or while the password is the default one, a warning message is displayed on the top banner of each Web configuration page. We want to encourage you to change the password in order to enforce the security of your modem. Please refer to the chapter **password** page 25 for more information.

Gateway – Status Web Page Group

1. Software

The information section shows the hardware and software information about your gateway.

The status section of this page shows how long your gateway has operated since last time being powered up, and some key information the Cable Modem received during the initialization process with your cable company. If Network Access shows “Allowed,” then your cable company has configured your gateway to have Internet connectivity. If not, you may not have Internet access, and should contact your cable company to resolve this.

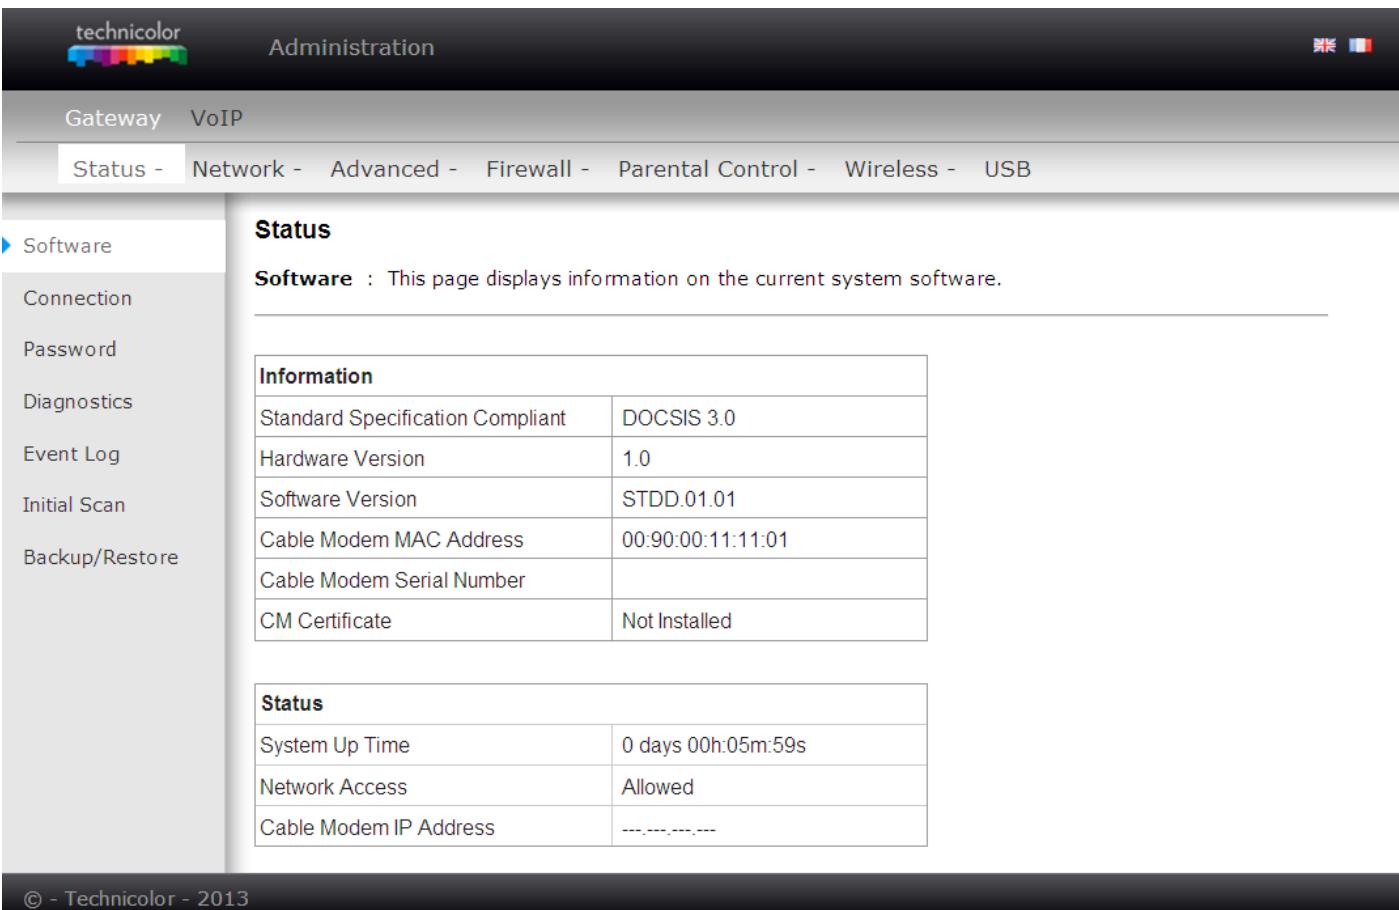

The screenshot shows the 'Software' section of the Technicolor Gateway Status Web Page. The left sidebar lists navigation options: Software, Connection, Password, Diagnostics, Event Log, Initial Scan, and Backup/Restore. The main content area has two tables: 'Information' and 'Status'.

Information Table:

Information	
Standard Specification Compliant	DOCSIS 3.0
Hardware Version	1.0
Software Version	STDD.01.01
Cable Modem MAC Address	00:90:00:11:11:01
Cable Modem Serial Number	
CM Certificate	Not Installed

Status Table:

Status	
System Up Time	0 days 00h:05m:59s
Network Access	Allowed
Cable Modem IP Address	---.---.---.---

Fig.2-3 Gateway\Status\Software

2. Connection

This page reports current connection status containing startup procedures, downstream and upstream status, CM online information, and so on. The information can be useful to your cable company's support technician if you're having problems.

technicolor Administration EN FR

Gateway VoIP

Status - Network - Advanced - Firewall - Parental Control - Wireless - USB

Software

Connection

Password

Diagnostics

Event Log

Initial Scan

Backup/Restore

Status

Connection : This page displays information on the status of the cable modem's HFC and IP network connectivity.

Startup Procedure

Procedure	Status	Comment
Acquire Downstream Channel	Locked	
Connectivity State	OK	Operational
Boot State	OK	Operational
Configuration File	OK	
Security	Disabled	Disabled

Downstream Channel

Channel	Lock Status	Modulation	Channel ID	Symbol Rate	Frequency	Power	SNR
1	Locked	QAM256	1	5360537		5.3 dBmV	48.8 dB
2	Not Locked	Unknown	0	Unknown		0.0 dBmV	0.0 dB
3	Not Locked	Unknown	0	Unknown		0.0 dBmV	0.0 dB
4	Not Locked	Unknown	0	Unknown		0.0 dBmV	0.0 dB
5	Not Locked	Unknown	0	Unknown		0.0 dBmV	0.0 dB
6	Not Locked	Unknown	0	Unknown		0.0 dBmV	0.0 dB
7	Not Locked	Unknown	0	Unknown		0.0 dBmV	0.0 dB
8	Not Locked	Unknown	0	Unknown		0.0 dBmV	0.0 dB

Upstream Channel

Channel	Lock Status	Modulation	Channel ID	Symbol Rate	Frequency	Power
1	Locked	QAM64	3	2560 Ksym/sec		37.5 dBmV
2	Not Locked	Unknown	0	0 Ksym/sec		0.0 dBmV
3	Not Locked	Unknown	0	0 Ksym/sec		0.0 dBmV
4	Not Locked	Unknown	0	0 Ksym/sec		0.0 dBmV

CM IP Address **Duration** **Expires**
 ----- D: -- H: -- M: -- S: -- ----- --:--:--:--:--:--

Current System Time: Wed Jul 03 14:07:44 2013

© - Technicolor - 2013

Fig. 2-4 Gateway>Status|Connection

3. Password

By default, the username is “**admin**” and the password is “**adminpassword**”.

This is set by different actions (non exhaustive list):


- at the manufactory level,
- following a reset factory on the modem,
- following a reset from the operator,
- following a change by the user who wants to come back to the default setting after using its own settings

When the current password is the default one, the user is strongly encouraged to change the default web password.

At your first connection or while the password is the default one, a warning message is displayed on the top banner of each Web configuration page. We want to encourage you to change the password in order to enforce the security of your modem.

The password can be a maximum of 8 characters and is case sensitive. In addition, this page can be used to restore the gateway to its original factory settings. Use this with caution, as all the settings you have made will be lost. To perform this reset, set **Restore Factory Defaults** to **Yes** and click **Apply**. This has the same effect as a factory reset using the rear panel reset switch, where you hold on the switch for 5 seconds, then release it.

Note: We are always suggesting you to modify the password. This is a basic protection against wrongful access to the Gateway Web pages.

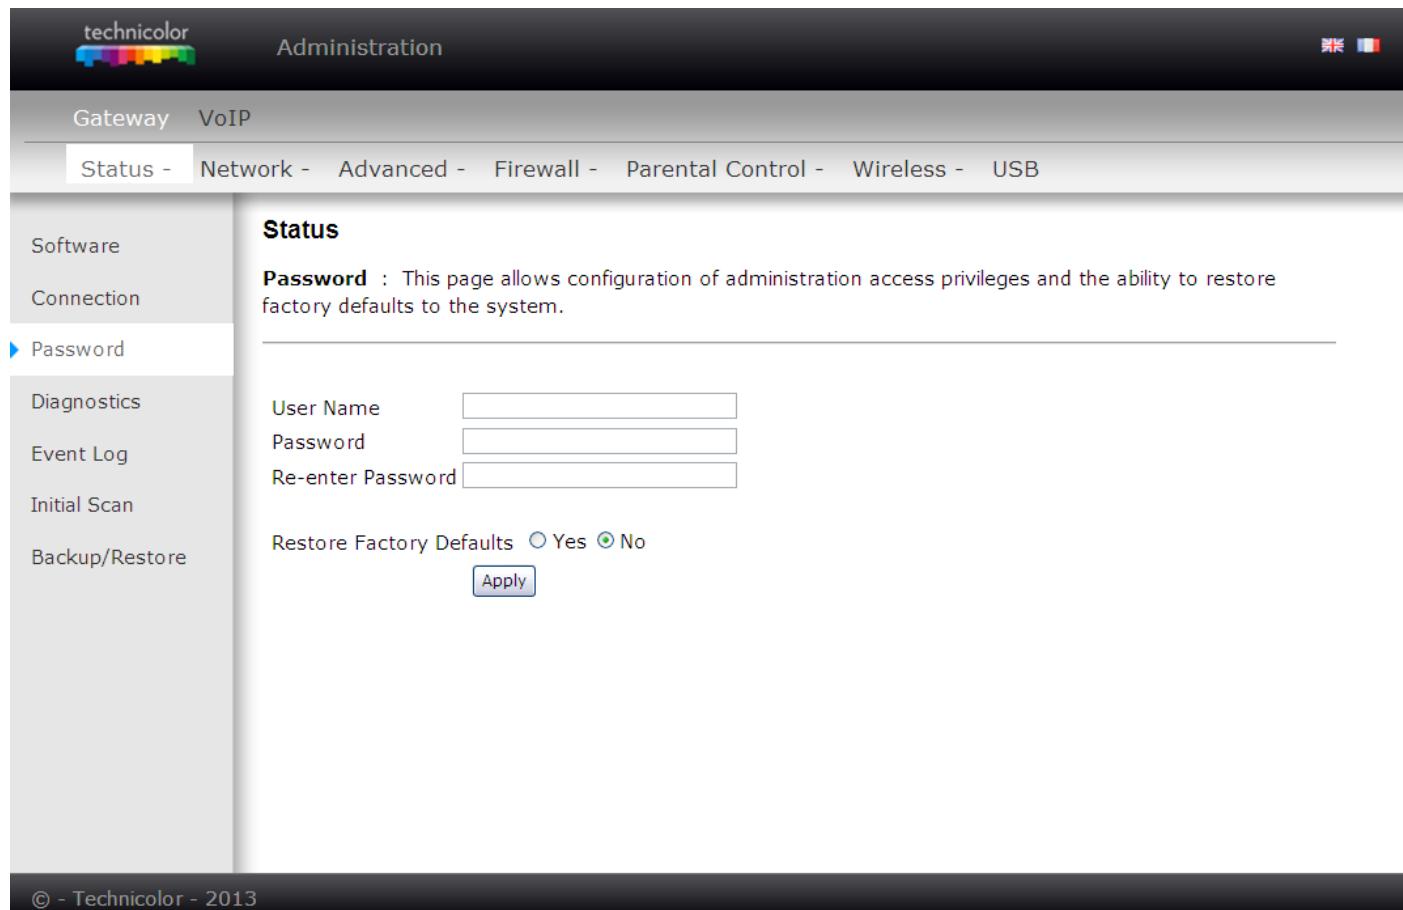

The screenshot shows the 'Status' section of the 'Password' configuration page. On the left, there's a sidebar with links like Software, Connection, Password (which is selected and highlighted in blue), Diagnostics, Event Log, Initial Scan, and Backup/Restore. The main content area has a heading 'Status'. Below it, a note says: 'Password : This page allows configuration of administration access privileges and the ability to restore factory defaults to the system.' There are three input fields for 'User Name', 'Password', and 'Re-enter Password'. Below these is a section for 'Restore Factory Defaults' with radio buttons for 'Yes' (selected) and 'No'. At the bottom is a blue 'Apply' button. The top navigation bar includes links for 'Gateway', 'VoIP', 'Administration', and language selection (UK and FR). The footer contains the copyright notice '© - Technicolor - 2013'.

Fig. 2-5 Gateway\Status\Password

To change the password: type the password, and re-enter it again.

If the password is accepted, you are required to re log on the web pages:



Fig. 2-6 Password request dialog

If the password is no accepted, an error message is displayed:

HTTP 401 - Unauthorized

Authorization is required to access the configuration server.

You must enter the correct username and/or password.

Please reflash the web and wait for Password dialog pop-up, then typing the correct username and password again.



4. Diagnostics


This page offers basic diagnostic tools for you to utilize when connectivity problems occur. When you ping an Internet device, you send a packet to its TCP/IP stack, and it sends one back to yours. To use the ping Test, enter the information needed and press Start Test; the Result will be displayed in the lower part of the window. Press Abort Test to stop, and Clear Results to clear the result contents. Note: Firewalls may cause pings to fail but still provide you TCP/IP access to selected devices behind them. Keep this in mind when ping a device that may be behind a firewall. Ping is most useful to verify connectivity with PCs which do not have firewalls, such as the PCs on your LAN side.

The screenshot shows the 'Diagnostics' section of the Technicolor Gateway Status page. The left sidebar lists navigation options: Software, Connection, Password, **Diagnostics** (which is selected), Event Log, Initial Scan, and Backup/Restore. The main content area has a title 'Status' and a sub-section 'Diagnostics' with the note: 'This page provides for ping diagnostics to the LAN to help with IP connectivity problems.' Below this is a 'Ping Test Parameters' form with fields: 'Ping Target' (192.168.0.1), 'Ping Size' (64 bytes), 'No. of Pings' (3), and 'Ping Interval' (1000 ms). At the bottom of the form are three buttons: 'Start Test', 'Abort Test', and 'Clear Results'. A results box titled 'Results' contains the message 'Waiting for input...'. A red note at the bottom of the results box says: 'To get an update of the results you must REFRESH the page.'

Fig. 2-7 Gateway>Status|Diagnostics

5. Event Log

This page displays the contents of the SNMP event log. Press “**Clear Log**” button to clear the logs.

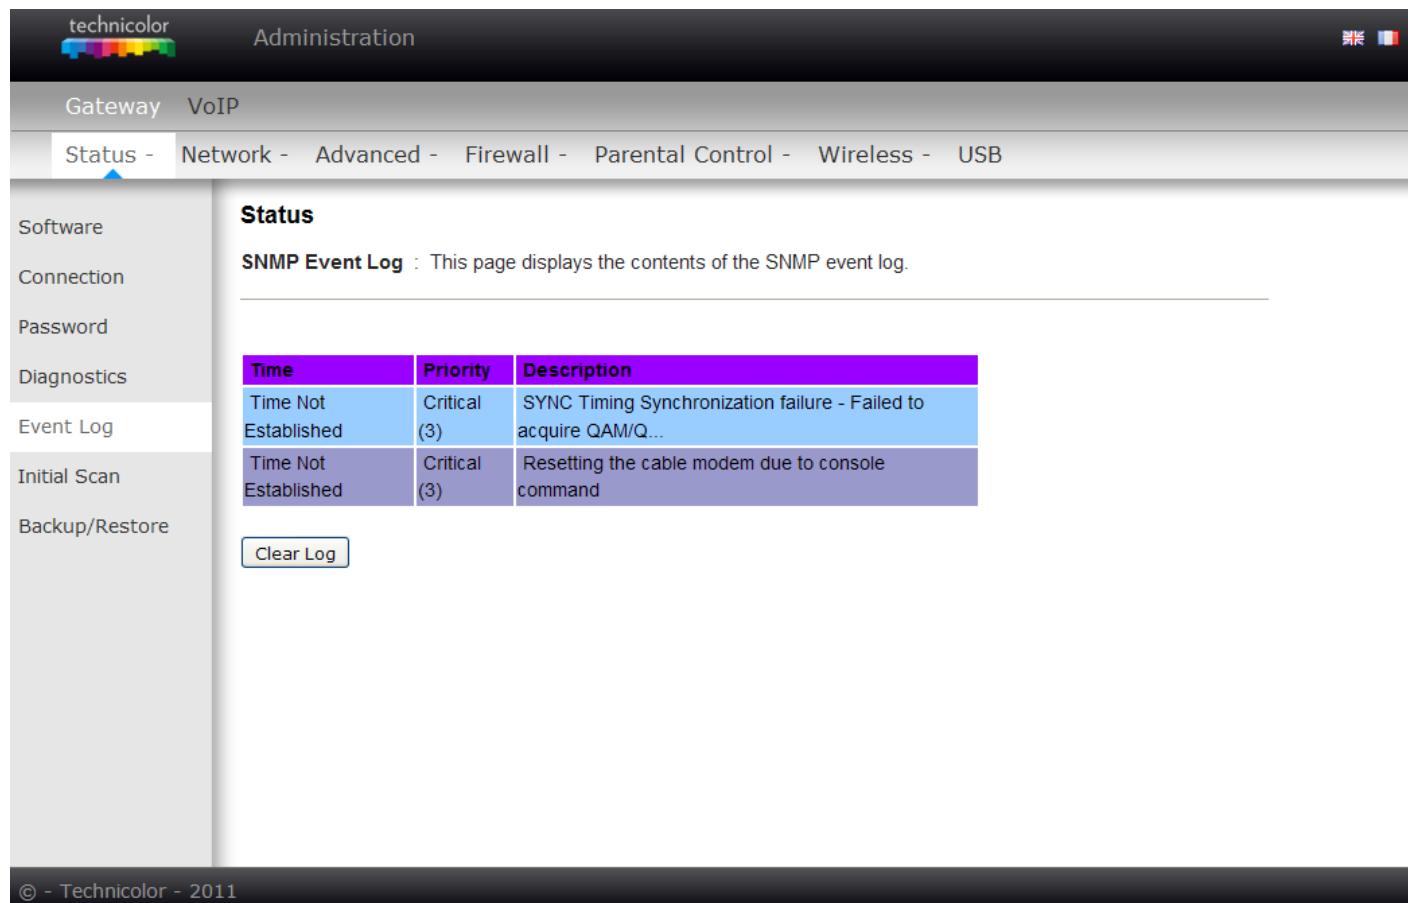

Time	Priority	Description
Time Not Established	Critical (3)	SYNC Timing Synchronization failure - Failed to acquire QAM/Q...
Time Not Established	Critical (3)	Resetting the cable modem due to console command


Clear Log

Fig. 2-8 Gateway>Status|Event Log

6. Initial Scan

To speed up the modem's first time connection, enter known downstream frequency and/or upstream channel ID information here. Then click “**Apply and Reboot**” button to start scanning the cable network beginning with the values supplied here.

The value is provided in Hertz. So, for 603 MHz, you must type: 603000000

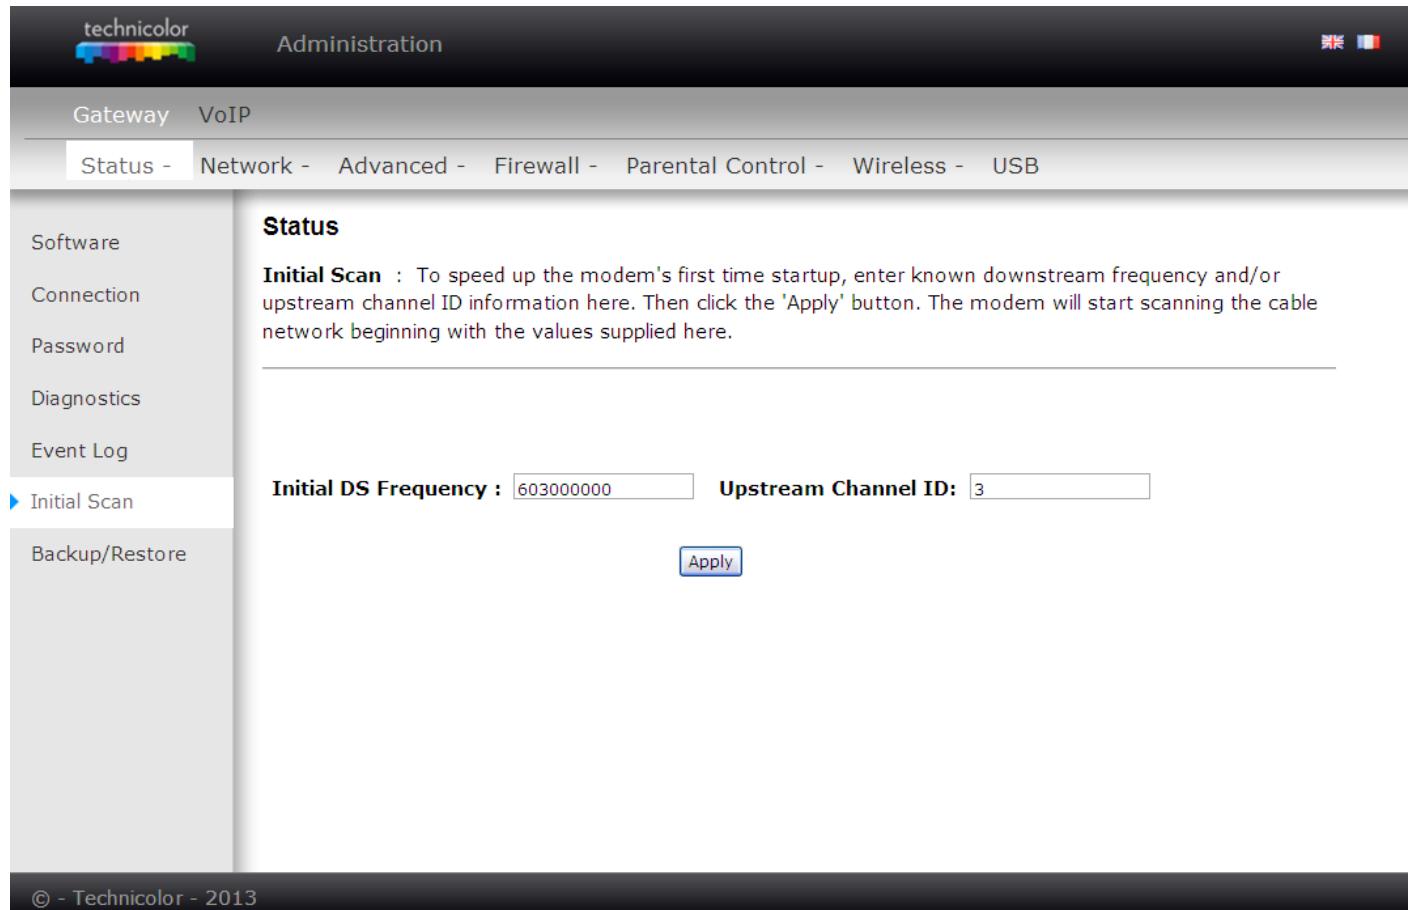

The screenshot shows the Technicolor Gateway Administration interface. The top navigation bar includes links for technicolor, Administration, Gateway, VoIP, Status, Network, Advanced, Firewall, Parental Control, Wireless, and USB. The left sidebar lists Software, Connection, Password, Diagnostics, Event Log, and Initial Scan (which is selected). The main content area is titled "Status" and contains a red warning message: "Initial Scan : To speed up the modem's first time startup, enter known downstream frequency and/or upstream channel ID information here. Then click the 'Apply' button. The modem will start scanning the cable network beginning with the values supplied here." Below this, there are two input fields: "Initial DS Frequency : Upstream Channel ID: ". A blue "Apply" button is located below the input fields. At the bottom of the page, a copyright notice reads "© - Technicolor - 2013".

Fig. 2-9 Gateway>Status|Initial Scan

7. Backup/Restore

Backup/Restore Settings: This page allows you to save your current settings locally on your PC, or restore settings previously saved. The default file name is “GatewaySettings.bin”.

The screenshot shows the 'Status' section of the Technicolor Gateway administration interface. The left sidebar lists various status categories: Software, Connection, Password, Diagnostics, Event Log, Initial Scan, and Backup/Restore. The 'Backup/Restore' item is currently selected. The main content area is titled 'Status' and contains a 'Backup' section with a 'Backup' button. Below it is a 'Restore Settings' section with a file input field, a 'Browse...' button, and a 'Restore' button. The top navigation bar includes tabs for Administration, Gateway, VoIP, and links for Status, Network, Advanced, Firewall, Parental Control, Wireless, and USB. Language selection icons for English and French are also present in the top right corner.

Fig 2-10 Gateway\Status\ Backup/Restore

Gateway – Network Web Page Group

1. LAN

You can activate the DHCP server function for the LAN on this page.

With this activated function,

- your cable company's DHCP server provides one IP address for your gateway,
- and your gateway's DHCP server provides IP addresses, starting at the address you set in IP Address on the LAN page, to your PCs. A DHCP server leases an IP address with an expiration time.

To change the IP address that your gateway will use on the LAN side, enter it into the **IP Address** box and then click **Apply**.

IP Address and Subnet Mask:

A private IP address and Subnet Mask for LAN sub netting.

For example 192.168.0.1 / 255.255.255.0.

DHCP Server:

- Select the check point of “Yes” or “No” to enable or disable a simple DHCP server for LAN.
- Configure the IP address numbers for the DHCP server with “Lease pool start” and “Lease pool end”.
- Configure the IP address lease time with “Lease time” for DHCP server. Default value is 604800 seconds.

Network Configuration

IP Address:	<input type="text" value="192.168.0.1"/>
Subnet Mask:	<input type="text" value="255.255.255.0"/>
MAC Address:	00:10:95:de:ad:05
DHCP Server:	<input checked="" type="radio"/> Yes <input type="radio"/> No
Lease Pool Start:	<input type="text" value="192.168.0.10"/>
Lease Pool End:	<input type="text" value="192.168.0.254"/>
Lease Time:	<input type="text" value="604800"/>

Apply


Fig. 2-11 Gateway\Network\LAN

2. WAN

You can configure the optional internal DHCP server for the WAN on this page. This can be required by some ISP providers.

Select different WAN Connection Type will lead to different contents. Take the WAN connection type-DHCP for example, you can release and renew the WAN lease by pressing the buttons.

You can enter a spoofed MAC address that causes your gateway networking stack to use that MAC address when communicating instead of the usual WAN MAC address, e.g., if the MAC address is **00:10:18:de:ad:03**, this spoofed MAC address could be **00:11:e3:df:ad:05** or any desired MAC address.

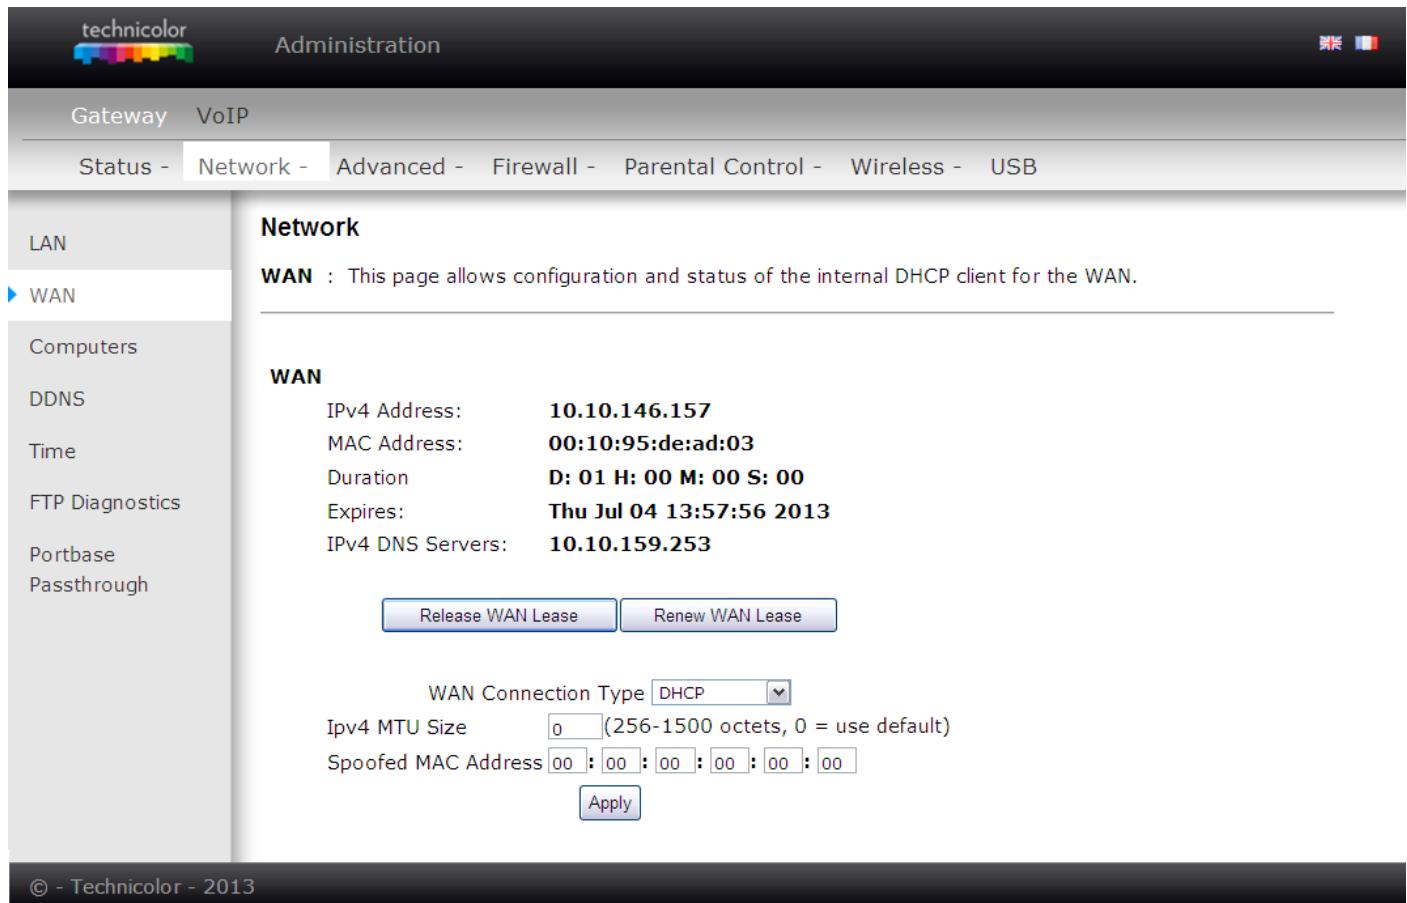

The screenshot shows the 'Administration' interface of a Technicolor gateway. The left sidebar has links for LAN, WAN (which is selected), Computers, DDNS, Time, FTP Diagnostics, Portbase, and Passthrough. The main content area is titled 'Network' and specifically 'WAN'. It displays the following information:


- IPv4 Address:** **10.10.146.157**
- MAC Address:** **00:10:95:de:ad:03**
- Duration:** **D: 01 H: 00 M: 00 S: 00**
- Expires:** **Thu Jul 04 13:57:56 2013**
- IPv4 DNS Servers:** **10.10.159.253**

Below this are two buttons: 'Release WAN Lease' and 'Renew WAN Lease'. Further down are fields for 'WAN Connection Type' (set to 'DHCP'), 'Ipv4 MTU Size' (set to '0'), and 'Spoofed MAC Address' (set to '00:00:00:00:00:00'). An 'Apply' button is located below these fields. The bottom of the screen shows the copyright notice: '© - Technicolor - 2013'.

Fig.2-12 Gateway\Network\WAN

3. Computers

This page displays the status of the DHCP clients and current system time. You can cancel an IP address lease by selecting it in the DHCP Client Lease Info list and then clicking the Force Available button. If you do so, you may have to perform a DHCP Renew on that PC, so that it can obtain a new lease.

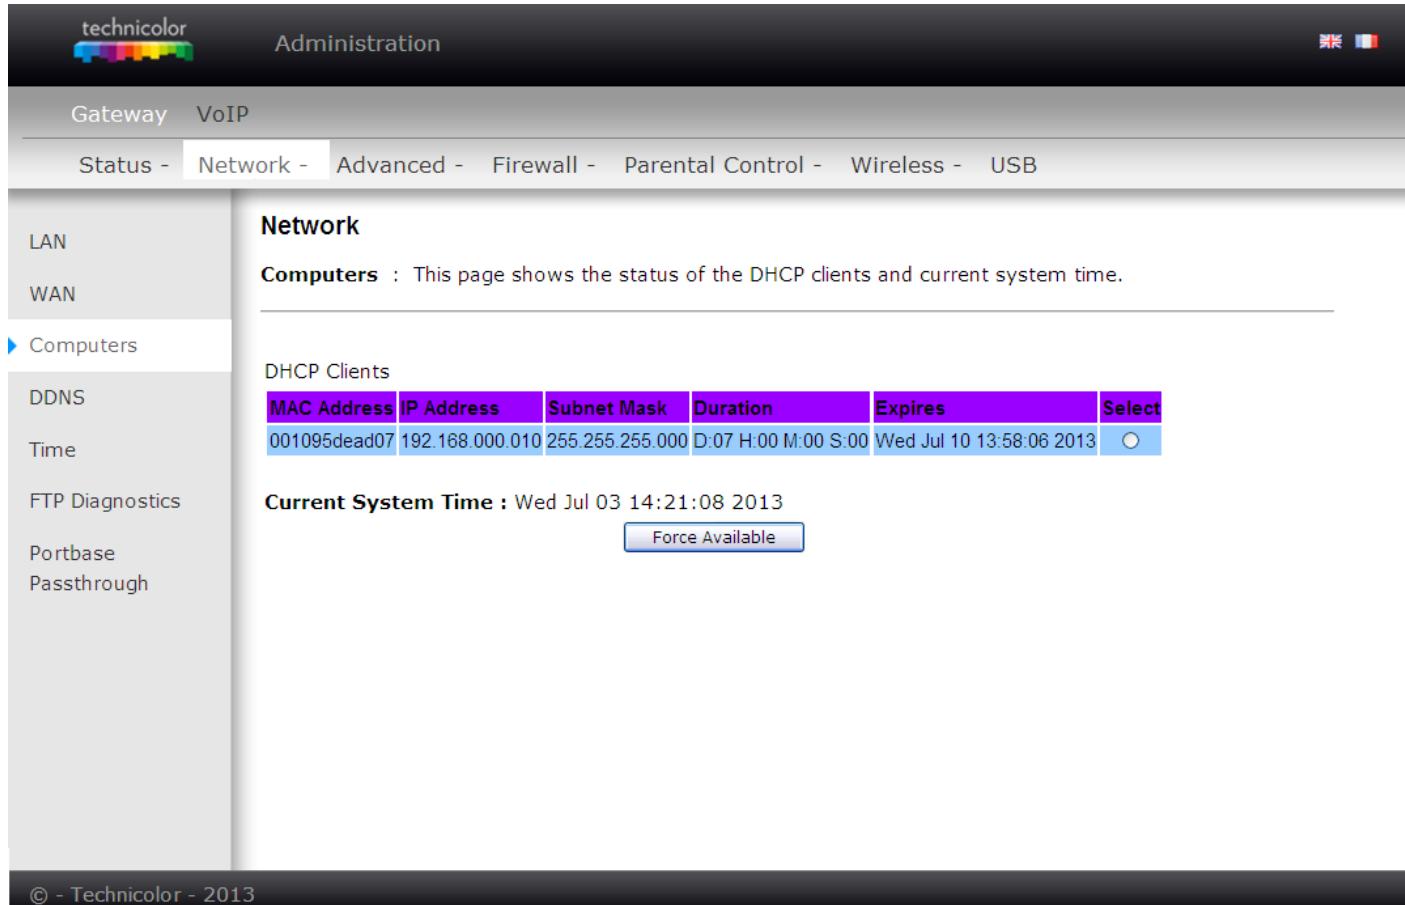

The screenshot shows the Technicolor Administration interface. The top navigation bar includes the Technicolor logo, a search bar, and links for Administration, Status, Network, Advanced, Firewall, Parental Control, Wireless, USB, and a language switch between English and French. On the left, a sidebar lists options: LAN, WAN, Computers (selected), DDNS, Time, FTP Diagnostics, Portbase, and Passthrough. The main content area is titled "Network" and "Computers". It displays a message: "Computers : This page shows the status of the DHCP clients and current system time." Below this, a table titled "DHCP Clients" lists one entry:


MAC Address	IP Address	Subnet Mask	Duration	Expires	Select
001095dead07	192.168.000.010	255.255.255.000	D:07 H:00 M:00 S:00	Wed Jul 10 13:58:06 2013	<input type="radio"/>

Below the table, the "Current System Time" is shown as "Wed Jul 03 14:21:08 2013". A "Force Available" button is located next to the table. At the bottom of the page, a copyright notice reads "© - Technicolor - 2013".

Fig.2-13 Gateway\Network\Computers

4. DDNS - Dynamic DNS service

This page allows to setup for Dynamic DNS server.

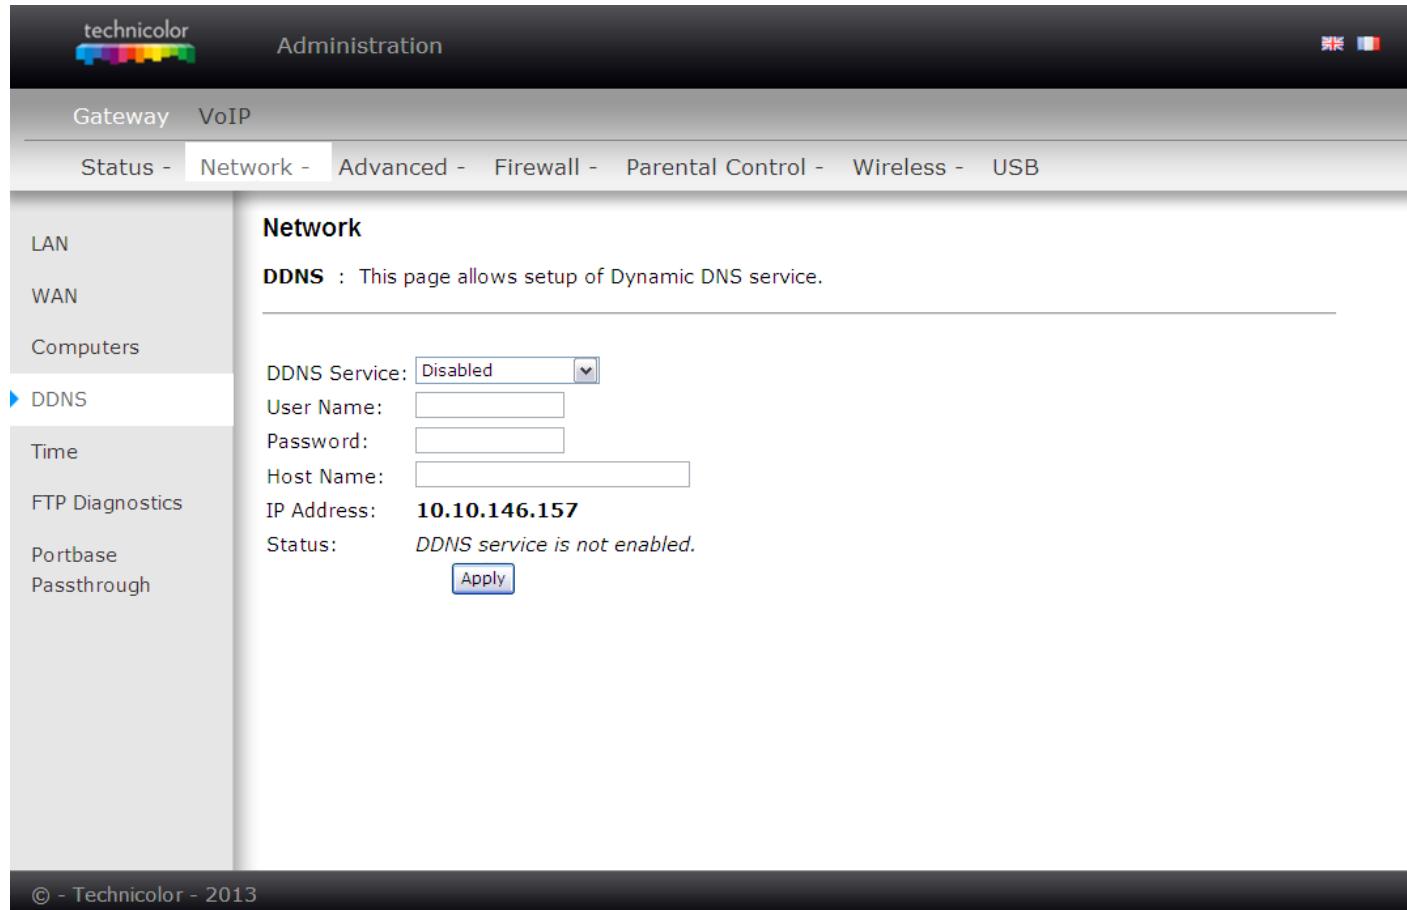

Network

DDNS : This page allows setup of Dynamic DNS service.

DDNS Service:	<input type="button" value="Disabled"/>
User Name:	<input type="text"/>
Password:	<input type="text"/>
Host Name:	<input type="text"/>
IP Address:	10.10.146.157
Status:	<i>DDNS service is not enabled.</i>

© - Technicolor - 2013


Fig.2-14 Gateway\Network\DDNS

- **DDNS Service-** Choose Enabled (www.DynDNS.org) to enable the basic setting. Choose Disabled to close the basic setting.
- **Username-** The username that you registered with your DDNS provider.
- **Password-** The password that you registered with your DDNS provider
- **Host Name-** The domain name or host name that is registered with your DDNS provider
- **Status-** It shows the DDNS service status whether it is enabled or disabled.

Click Apply to save the changes

5. Time

This page allows configuration and display of the system time obtained from network servers via Simple Network Time Protocol. The system has to be reset for any changes to take effect.

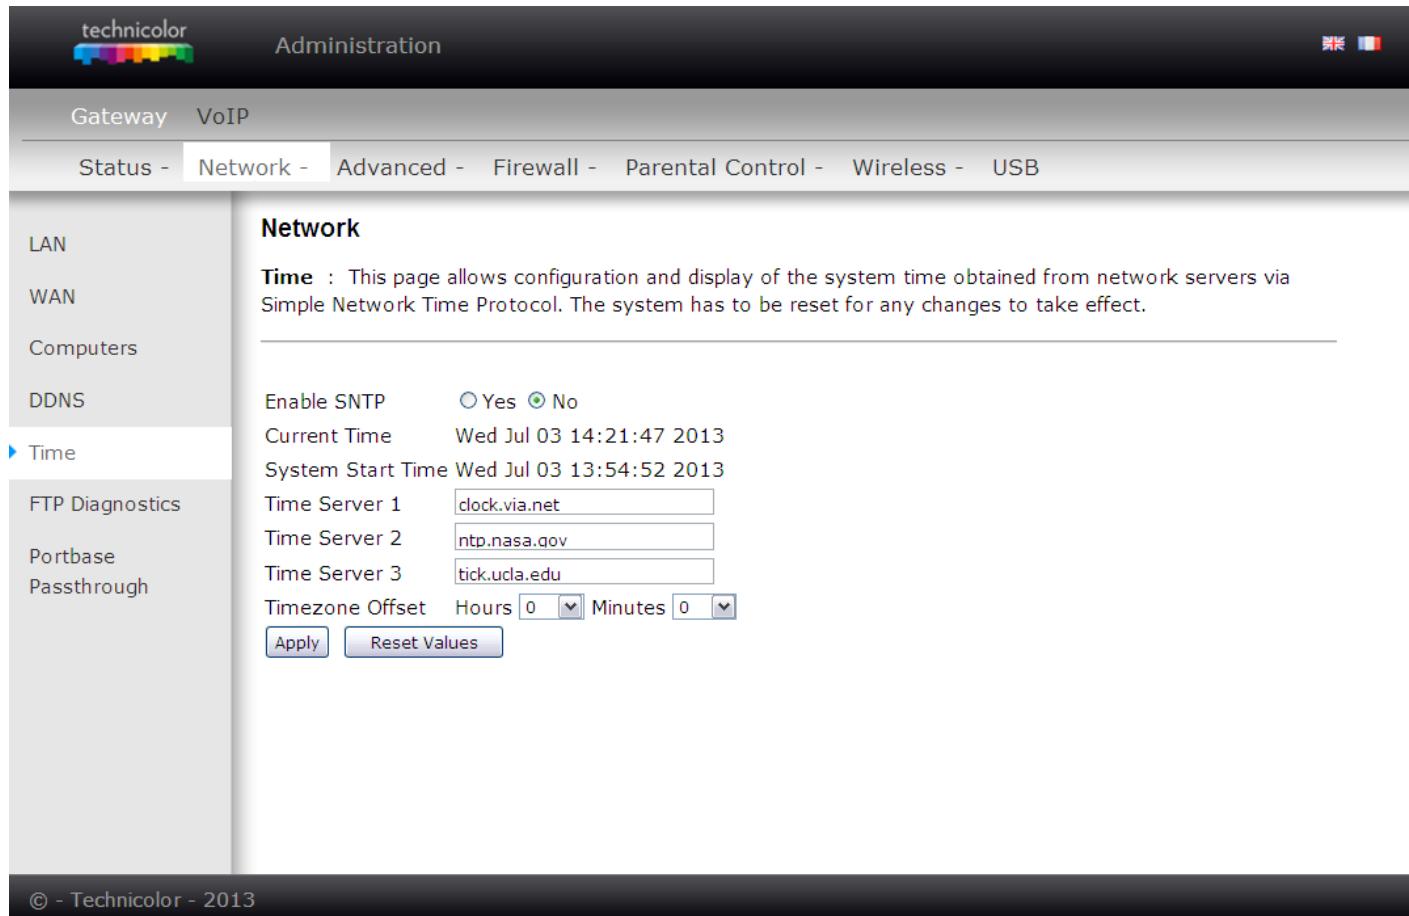

The screenshot shows the 'Network' section of the 'Time' configuration page. On the left sidebar, under the 'Time' category, 'Time' is selected. In the main content area, there is a note: 'Time : This page allows configuration and display of the system time obtained from network servers via Simple Network Time Protocol. The system has to be reset for any changes to take effect.' Below this note, there are three input fields for 'Time Server 1', 'Time Server 2', and 'Time Server 3', each containing a default value. There is also a dropdown for 'Timezone Offset' set to 'Hours 0 Minutes 0'. At the bottom of the form are two buttons: 'Apply' and 'Reset Values'.

Fig.2-15 Gateway\Network\Time

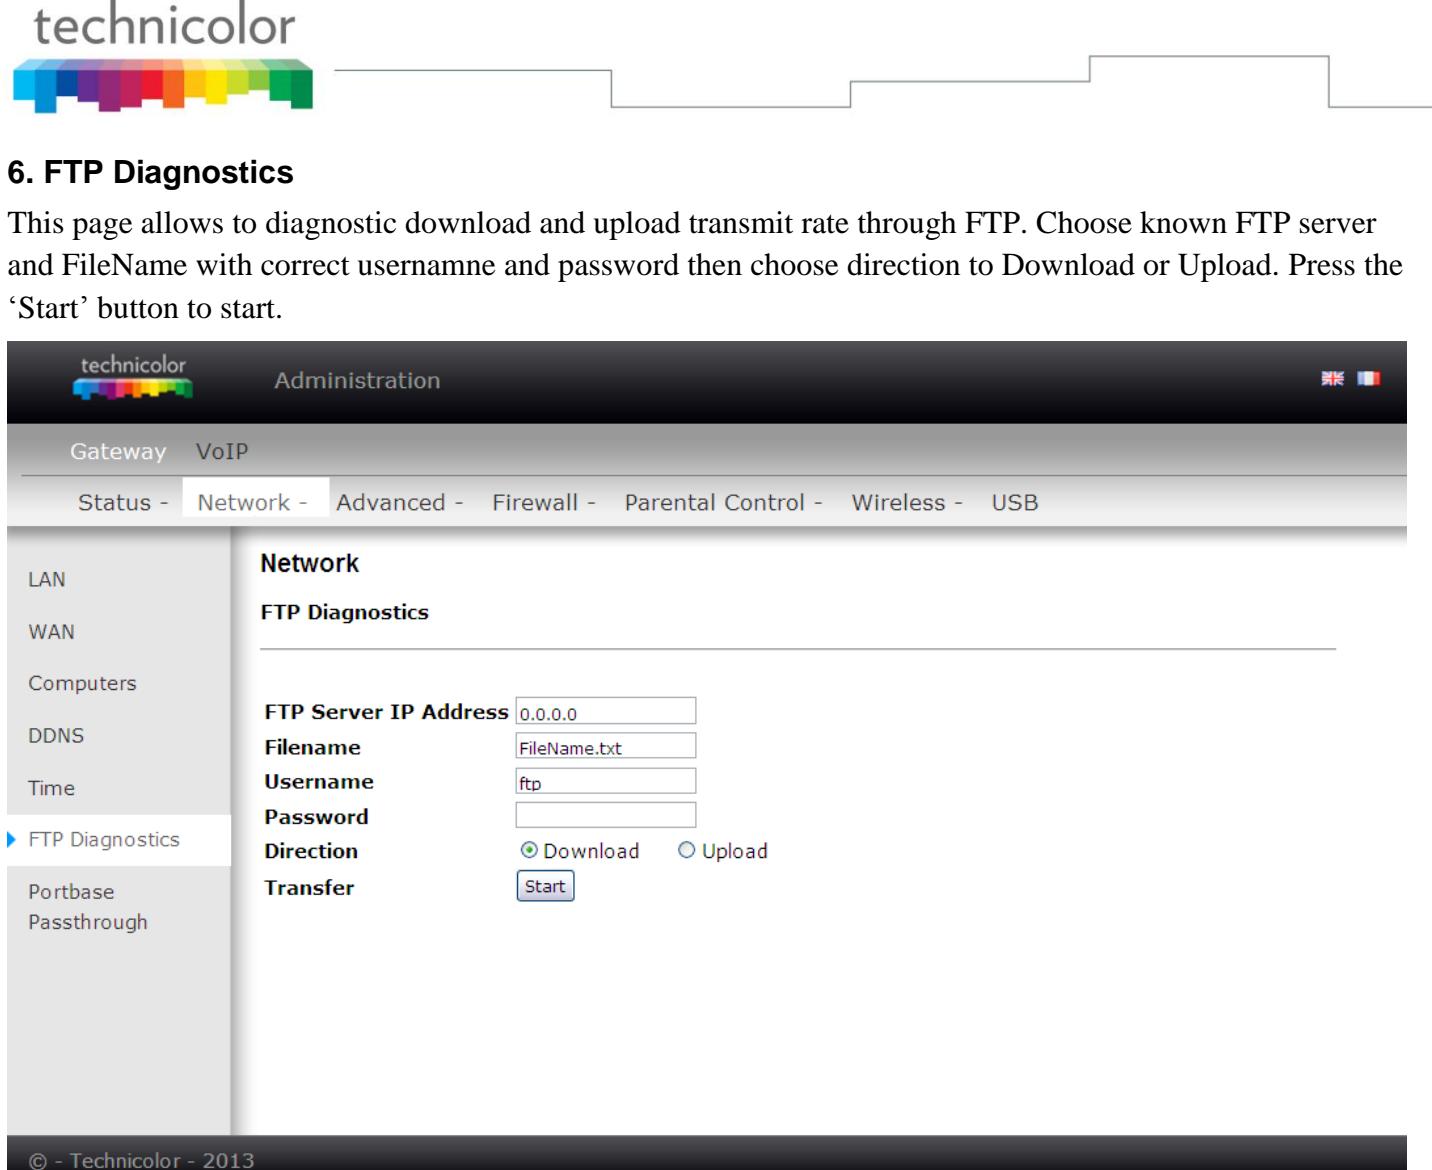


Fig.2-16 Gateway\Network\FTP Diagnostics

FTP Download	
Payload Data Bytes	6296 bytes
Total Packet Bytes	6752 bytes
Elapsed Time	0.027260 Secs
Payload Throughput	1.847689 Mbps
Packet Throughput	1.981511 Mbps

You will see the result on the page, when transmit done.



7. Port-base Passthrough

This page allows the configuration of each Ethernet Port. Per default, each Ethernet port is routed. If you enable the Passthrough, the Ethernet Port will have a direct connection to the Network. Note that access to this web access can be denied by your Cable operator

The screenshot shows the router's administration interface. The top navigation bar includes the Technicolor logo, 'Administration', and language selection (UK, FR). Below the navigation is a horizontal menu with tabs: 'Gateway', 'VoIP', 'Status -', 'Network -' (which is selected), 'Advanced -', 'Firewall -', 'Parental Control -', 'Wireless -', and 'USB'. On the left, a sidebar lists navigation links: LAN, WAN, Computers, DDNS, Time, FTP Diagnostics, Portbase, and Passthrough (indicated by a blue arrow icon). The main content area is titled 'Network' and contains a descriptive paragraph about Port-base Passthrough. At the bottom of the content area is a horizontal line. The footer contains the copyright notice '© - Technicolor - 2013'.

Network

Port-base Passthrough : This page allows the configuration of each Ethernet Port. Per default, each Ethernet port is routed. If you enable the Passthrough, the Ethernet Port will have a direct connection to the Network. Note that access to this web access can be denied by your Cable operator.


© - Technicolor - 2013

Fig.2-17 Gateway\Network\ Port-base Passthrough

Gateway – Advanced Web Page Group

1. Options

This page allows you to enable/disable some features of the Wireless Voice Gateway.

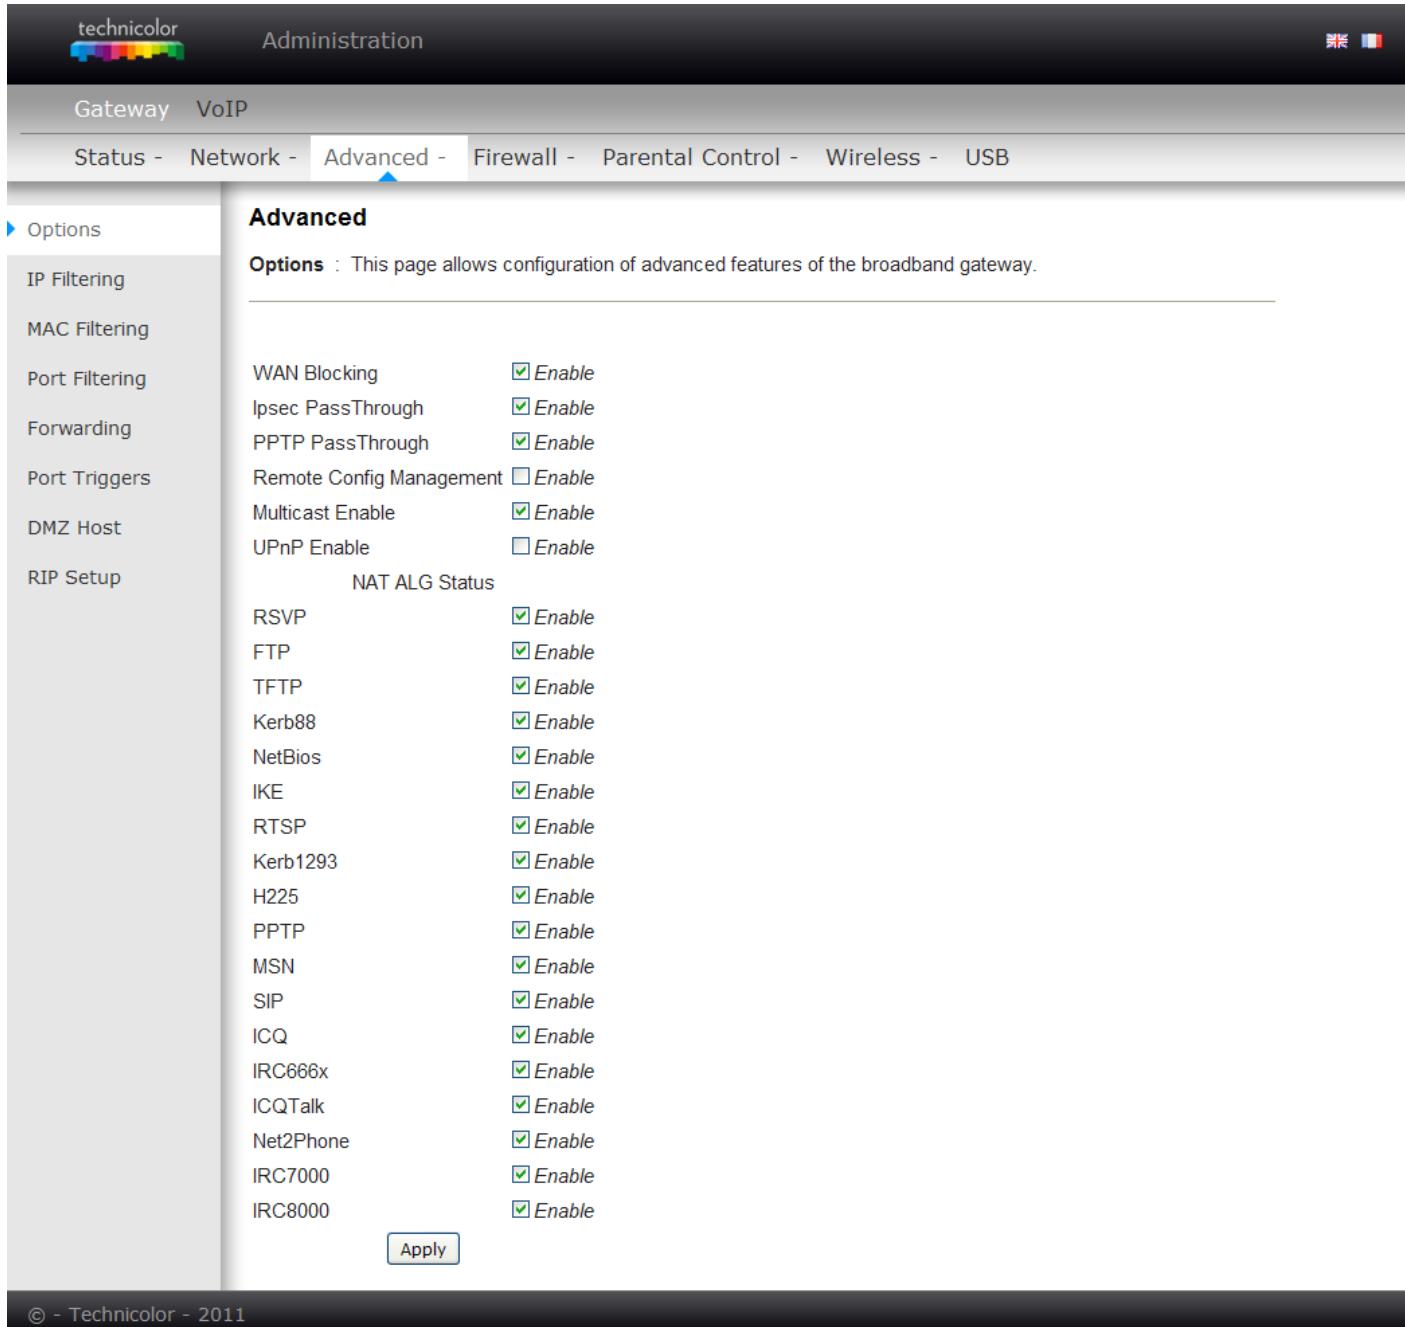

Advanced

Options : This page allows configuration of advanced features of the broadband gateway.

WAN Blocking	<input checked="" type="checkbox"/> Enable
Ipsec PassThrough	<input checked="" type="checkbox"/> Enable
PPTP PassThrough	<input checked="" type="checkbox"/> Enable
Port Triggers	<input type="checkbox"/> Remote Config Management
DMZ Host	<input checked="" type="checkbox"/> Multicast Enable
RIP Setup	<input type="checkbox"/> UPnP Enable
NAT ALG Status	
RSVP	<input checked="" type="checkbox"/> Enable
FTP	<input checked="" type="checkbox"/> Enable
TFTP	<input checked="" type="checkbox"/> Enable
Kerb88	<input checked="" type="checkbox"/> Enable
NetBios	<input checked="" type="checkbox"/> Enable
IKE	<input checked="" type="checkbox"/> Enable
RTSP	<input checked="" type="checkbox"/> Enable
Kerb1293	<input checked="" type="checkbox"/> Enable
H225	<input checked="" type="checkbox"/> Enable
PPTP	<input checked="" type="checkbox"/> Enable
MSN	<input checked="" type="checkbox"/> Enable
SIP	<input checked="" type="checkbox"/> Enable
ICQ	<input checked="" type="checkbox"/> Enable
IRC666x	<input checked="" type="checkbox"/> Enable
ICQTalk	<input checked="" type="checkbox"/> Enable
Net2Phone	<input checked="" type="checkbox"/> Enable
IRC7000	<input checked="" type="checkbox"/> Enable
IRC8000	<input checked="" type="checkbox"/> Enable

Apply

© - Technicolor - 2011

Fig.2-18 Gateway\Advanced\Options

- **WAN Blocking** prevents others on the WAN side from being able to ping your gateway. With WAN Blocking enabled, your gateway will not respond to pings it receives, effectively “hiding” your gateway.
- **Ipsec PassThrough** enables IpSec type packets to pass WAN ⇔ LAN. IPsec (IP Security) is a security mechanism used in Virtual Private Networks (VPNs).
- **PPTP PassThrough** enables PPTP type packets to pass WAN ⇔ LAN. PPTP (Point to Point Tunneling Protocol) is another mechanism sometimes used in VPNs.
- **Remote Config Management** makes the configuration web pages in your gateway accessible from the


WAN side. Note that page access is limited to only those who know the gateway access password. When accessing your gateway from a remote location, you must use HTTP port 8080 and the WAN IP address of the gateway. e.g., if the WAN IP address is 157.254.5.7, you would navigate to <http://157.254.5.7:8080> to reach your gateway.

- **Multicast Enable** enables multicast traffic to pass WAN↔ LAN. You may need to enable this to see some types of broadcast streaming and content on the Internet.
- **UPnP** Universal Plug and Play (UPnP) helps devices, such as Internet appliances and computers, access the network and connect to other devices as needed. UPnP devices can automatically discover the services from other registered UPnP devices on the network.

You can also to Enable or Disable other NAT ALG status for your LAN side.

2. IP Filtering

This page enables you to enter the IP address ranges of PCs on your LAN that you don't want to have outbound access to the WAN. These PCs can still communicate with each other on your LAN, but packets they send to WAN addresses are blocked by the gateway.

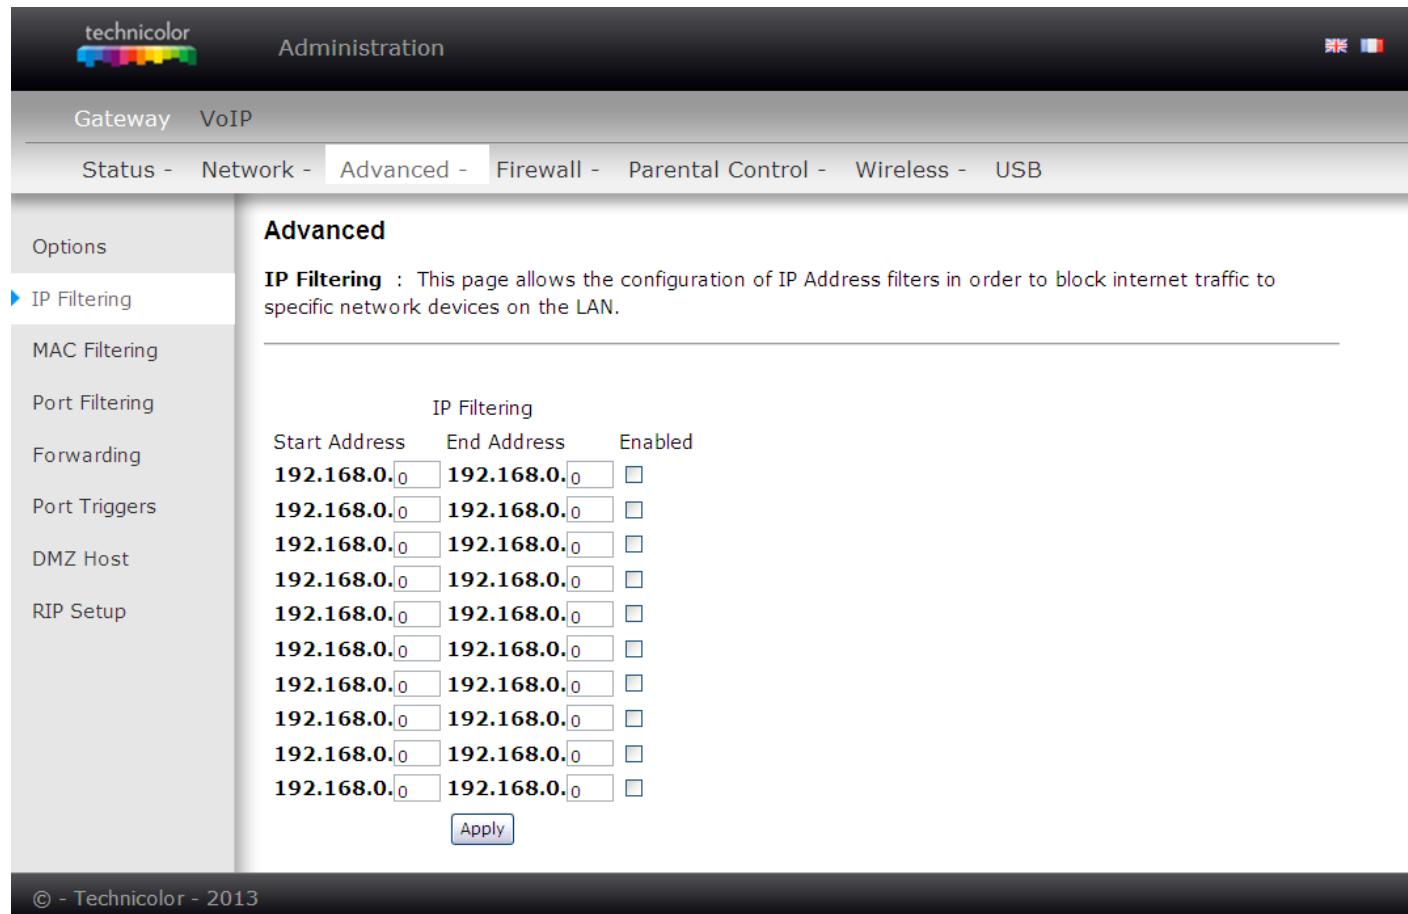

The screenshot shows the 'Advanced' section of the IP Filtering configuration. The table lists 10 entries, each consisting of three fields: Start Address, End Address, and Enabled status. All start and end addresses are set to 192.168.0.0, and all enabled checkboxes are checked. An 'Apply' button is located at the bottom of the table.


IP Filtering		
Start Address	End Address	Enabled
192.168.0.0	192.168.0.0	<input checked="" type="checkbox"/>
192.168.0.0	192.168.0.0	<input checked="" type="checkbox"/>
192.168.0.0	192.168.0.0	<input checked="" type="checkbox"/>
192.168.0.0	192.168.0.0	<input checked="" type="checkbox"/>
192.168.0.0	192.168.0.0	<input checked="" type="checkbox"/>
192.168.0.0	192.168.0.0	<input checked="" type="checkbox"/>
192.168.0.0	192.168.0.0	<input checked="" type="checkbox"/>
192.168.0.0	192.168.0.0	<input checked="" type="checkbox"/>
192.168.0.0	192.168.0.0	<input checked="" type="checkbox"/>
192.168.0.0	192.168.0.0	<input checked="" type="checkbox"/>

© - Technicolor - 2013

Fig.2-19 Gateway\Advanced\IP Filtering

3. MAC Filtering

This page enables you to enter the MAC address of specific PCs on your LAN that you do not wish to have outbound access to the WAN. As with IP filtering, these PCs can still communicate with each other through the gateway, but packets they send to WAN addresses are blocked.

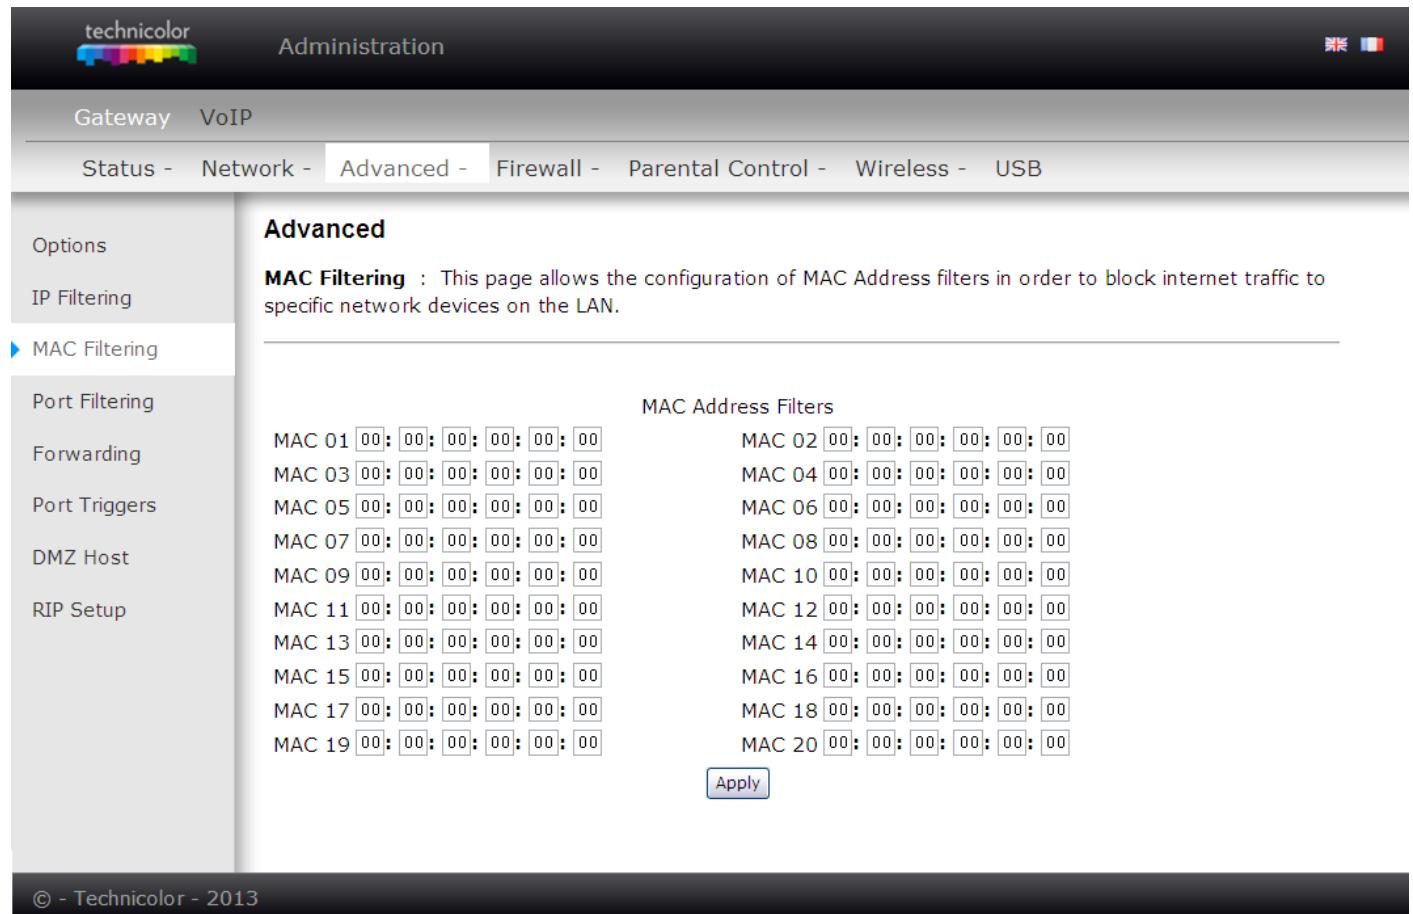

Advanced

MAC Filtering : This page allows the configuration of MAC Address filters in order to block internet traffic to specific network devices on the LAN.


MAC 01	00:00:00:00:00:00	MAC 02	00:00:00:00:00:00
MAC 03	00:00:00:00:00:00	MAC 04	00:00:00:00:00:00
MAC 05	00:00:00:00:00:00	MAC 06	00:00:00:00:00:00
MAC 07	00:00:00:00:00:00	MAC 08	00:00:00:00:00:00
MAC 09	00:00:00:00:00:00	MAC 10	00:00:00:00:00:00
MAC 11	00:00:00:00:00:00	MAC 12	00:00:00:00:00:00
MAC 13	00:00:00:00:00:00	MAC 14	00:00:00:00:00:00
MAC 15	00:00:00:00:00:00	MAC 16	00:00:00:00:00:00
MAC 17	00:00:00:00:00:00	MAC 18	00:00:00:00:00:00
MAC 19	00:00:00:00:00:00	MAC 20	00:00:00:00:00:00

Apply

Fig.2-20 Gateway\Advanced\MAC Filtering

4. Port Filtering

This page allows you to enter ranges of destination ports (applications) that you don't want your LAN PCs to send packets to. Any packets your LAN PCs send to these destination ports will be blocked. For example, you could block access to worldwide web browsing (http = port 80) but still allow email service (SMTP port 25 and POP-3 port 110). To enable port filtering, set Start Port and End Port for each range, and click Apply. To block only one port, set both Start and End ports with the same value.

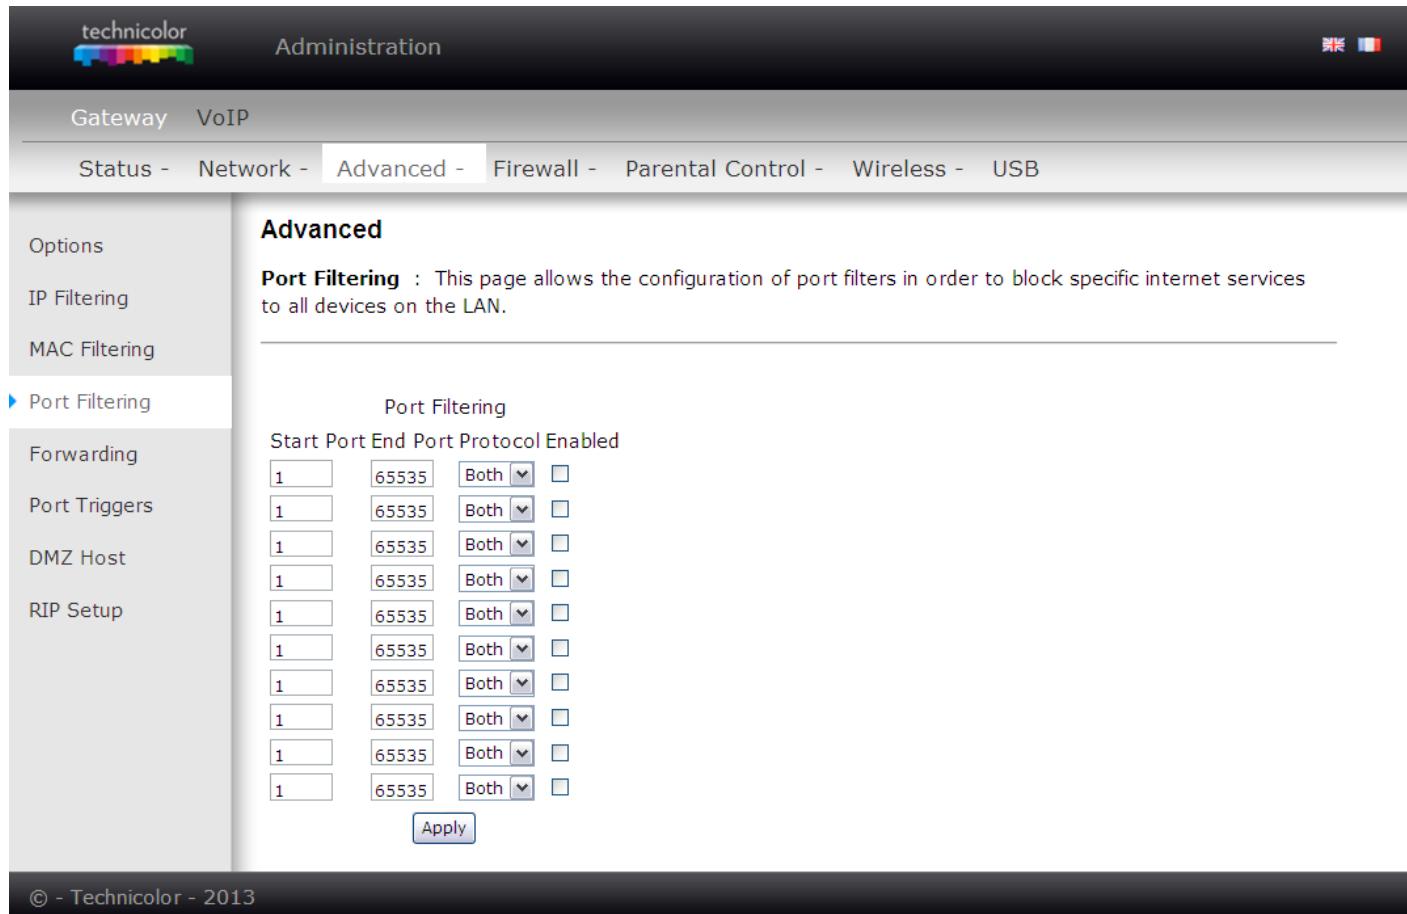


Start Port	End Port	Protocol	Enabled
1	65535	Both	<input type="checkbox"/>
1	65535	Both	<input type="checkbox"/>
1	65535	Both	<input type="checkbox"/>
1	65535	Both	<input type="checkbox"/>
1	65535	Both	<input type="checkbox"/>
1	65535	Both	<input type="checkbox"/>
1	65535	Both	<input type="checkbox"/>
1	65535	Both	<input type="checkbox"/>
1	65535	Both	<input type="checkbox"/>

Fig.2-21 Gateway\Advanced\Port Filtering

5. Forwarding

For LAN ⇄ WAN communications, the gateway normally only allows you to originate an IP connection with a PC on the WAN; it will ignore attempts of the WAN PC to originate a connection onto your PC. This protects you from malicious attacks from outsiders. However, sometimes you may wish for anyone outside to be able to originate a connection to a particular PC on your LAN if the destination port (application) matches one you specify.

This page allows you to specify up to rules. For example, to specify that outsiders should have access to an FTP server you have running at 192.168.0.5, create a rule with that address and Start Port =20 and End Port =21 (FTP port ranges) and Protocol = TCP (FTP runs over TCP and the other transport protocol, UDP), and click Apply. This will cause inbound packets that match to be forwarded to that PC rather than blocked. As these connections are not tracked, no entry is made for them in the Connection Table. The same IP address can be entered multiple times with different ports.

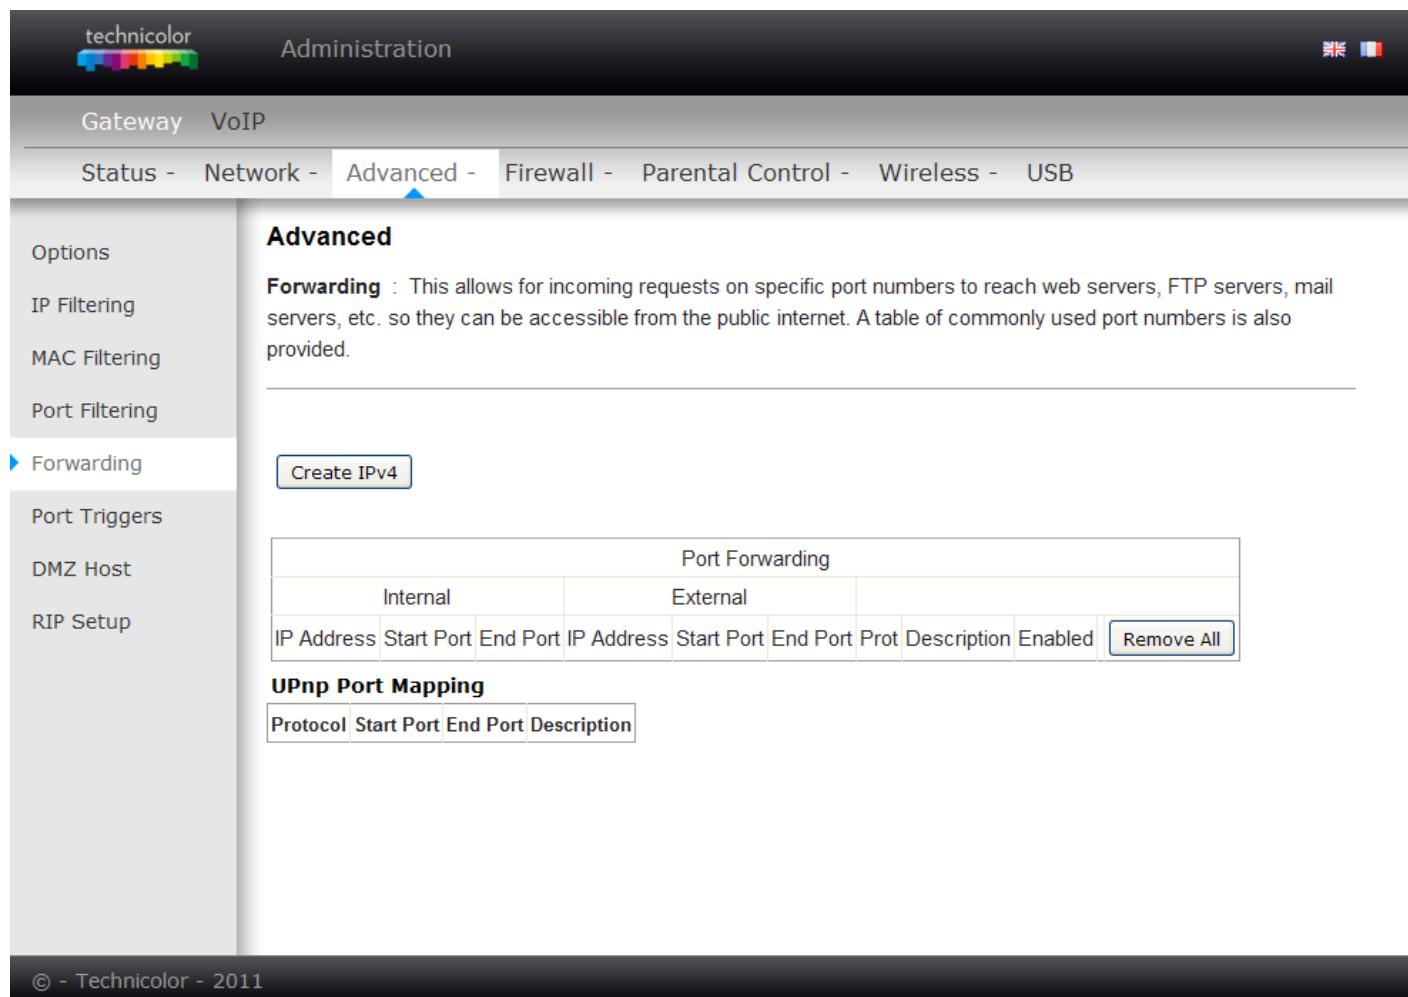

Port Forwarding								
Internal			External					
IP Address	Start Port	End Port	IP Address	Start Port	End Port	Prot	Description	Enabled
								<input type="button" value="Remove All"/>

Protocol	Start Port	End Port	Description
----------	------------	----------	-------------

Fig.2-22 Gateway\Advanced\Forwarding

Press ‘Create Ipv4’ button to specify rules. Choose Service Name or Port number range to set up. IP Address 0.0.0.0 means allow all IP address.

Known Rule Adder

Local IP Address:	<input type="text" value="0.0.0.0"/>
External IP Address:	<input type="text" value="0.0.0.0"/>
Service Name:	<input type="text" value="AIM Talk"/> <input type="button" value="▼"/>
<input type="button" value="Add"/>	
Local IP Address	<input type="text" value="0.0.0.0"/>
Local Start Port	<input type="text" value="0"/>
Local End Port	<input type="text" value="0"/>
External IP	<input type="text" value="0.0.0.0"/>
External Start Port	<input type="text" value="0"/>
External End Port	<input type="text" value="0"/>
Protocol	<input type="text" value="TCP"/> <input type="button" value="▼"/>
Description	<input type="text"/>
Enabled	<input type="text" value="Off"/> <input type="button" value="▼"/>
<input type="button" value="Cancel"/> <input type="button" value="Apply"/>	

This will cause inbound packets that match to be forwarded to that PC rather than blocked. As these connections are not tracked, no entry is made for them in the Connection Table. The same IP address can be entered multiple times with different ports.

6. Port Triggers

Some Internet activities, such as interactive gaming, require that a PC on the WAN side of your gateway be able to originate connections during the game with your game playing PC on the LAN side. You could use the Advanced-Forwarding web page to construct a forwarding rule during the game, and then remove it afterwards (to restore full protection to your LAN PC) to facilitate this. Port triggering is an elegant mechanism that does this work for you, each time you play the game.

The screenshot shows the router's web interface with the following details:

- Header:** technicolor logo, Administration tab selected, UK and FR flags.
- Top Navigation:** Gateway, VoIP, Status, Network, Advanced (selected), Firewall, Parental Control, Wireless, USB.
- Left Sidebar:** Options, IP Filtering, MAC Filtering, Port Filtering, Forwarding, Port Triggers (selected).
- Content Area:**
 - Advanced Section:** Subtitle "Advanced". Description: "Port Triggers : This page allows configuration of dynamic triggers to specific devices on the LAN. This allows for special applications that require specific port numbers with bi-directional traffic to function properly. Applications such as video conferencing, voice, gaming, and some messaging program features require these special settings."
 - Create Button:** A blue "Create" button.
 - Table:** "Port Triggering" table with columns: Trigger Range, Target Range, Start Port, End Port, Start Port, End Port, Protocol, Description, Enable, Remove All.
- Page Footer:** © - Technicolor - 2013

Fig.2-23 Gateway\Advanced\Port Triggers

Port Triggering works as follows. Imagine you want to play a particular game with PCs somewhere on the Internet. You make one time effort to set up a Port Trigger for that game, by entering into **Trigger Start Port** and **Trigger End Port** the range of destination ports your game will be sending to, and entering into **Target Start Port** the range of destination ports the other player (on the WAN side) will be sending to (ports your PC's game receives on). Application programs like games publish this information in user manuals. Later, each time you play the game, the gateway automatically creates the forwarding rule necessary. This rule is valid until 10 minutes after it sees game activity stop. After 10 minutes, the rule becomes inactive until the next matched outgoing traffic arrives.

e.g., suppose you specify Trigger Range from 6660 to 6670 and Target Range from 113 to 113. An outbound packet arrives at the gateway with your game-playing PC source IP address 192.168.0.10, destination port 666 over TCP/IP. This destination port is within the Trigger destined for port 113 to your game-playing PC at 192.168.0.10.


Press ‘Create’ button to specify rules. Choose **Service Name** or **Port** number range to set up. IP Address 0.0.0.0 means allow all IP address.

Trigger Start Port	<input type="text" value="0"/>
Trigger End Port	<input type="text" value="0"/>
Target Start Port	<input type="text" value="0"/>
Target End Port	<input type="text" value="0"/>
Protocol	<input type="button" value="BOTH ▾"/>
Description	<input type="text"/>
Enabled	<input type="button" value="Off ▾"/>
<input type="button" value="Apply"/>	

This will cause inbound packets that match to be forwarded to that PC rather than blocked. As these connections are not tracked, no entry is made for them in the Connection Table. The same IP address can be entered multiple times with different ports.

7. DMZ Host

Use this page to designate one PC on your LAN that should be left accessible to all PCs from the WAN side, for all ports. e.g., if you put an HTTP server on this machine, anyone will be able to access that HTTP server by using your gateway IP address as the destination. A setting of "0" indicates NO DMZ PC. "Host" is another Internet term for a PC connected to the Internet.

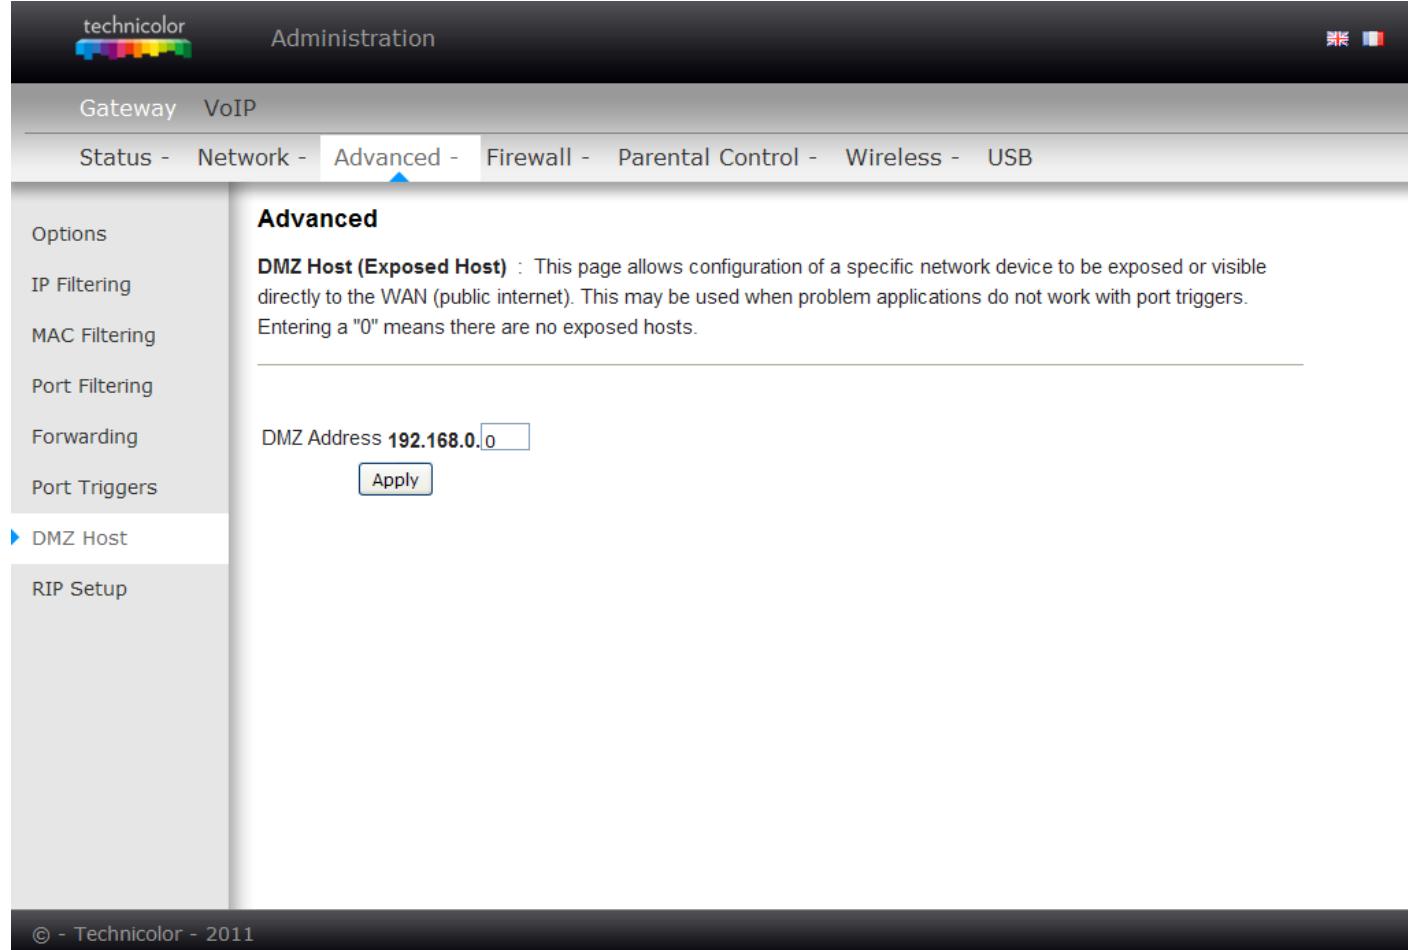


The screenshot shows the 'Advanced' tab selected in the top navigation bar. On the left, a sidebar lists various network settings: Options, IP Filtering, MAC Filtering, Port Filtering, Forwarding, Port Triggers, DMZ Host (which is currently selected and highlighted in blue), and RIP Setup. The main content area is titled 'Advanced' and contains a section for 'DMZ Host (Exposed Host)'. It explains that this page allows configuration of a specific network device to be exposed or visible directly to the WAN. It notes that entering '0' means there are no exposed hosts. Below this text is a text input field containing '192.168.0.0' and a blue 'Apply' button. At the bottom of the page, a copyright notice reads '© - Technicolor - 2011'.

Fig.2-24 Gateway\Advanced\DMZ Host

8. RIP (Routing Information Protocol) Setup

This feature enables the gateway to be used in small business situations where more than one LAN (local area network) is installed. The RIP protocol provides the gateway a means to “advertise” available IP routes to these LANs to your cable operator, so packets can be routed properly in this situation.

Your cable operator will advise you during installation if any setting changes are required here.

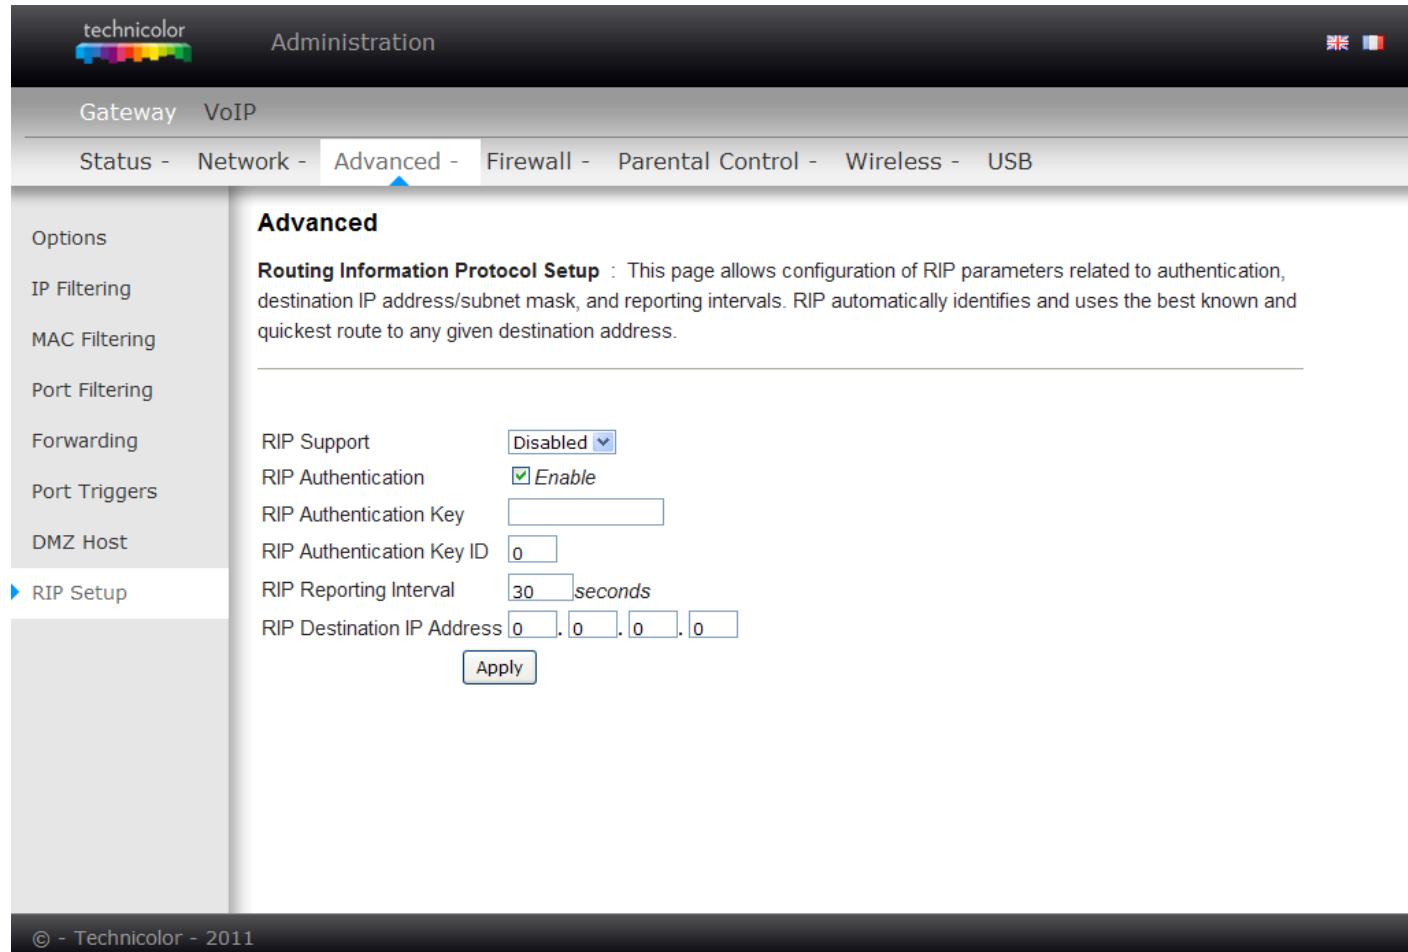

The screenshot shows the Technicolor Gateway's web-based management interface. The top navigation bar includes the Technicolor logo, a search bar, and links for Administration, Status, Network, Advanced (which is selected), Firewall, Parental Control, Wireless, and USB. Below the navigation is a language selection bar with English and French flags. The left sidebar contains links for Options, IP Filtering, MAC Filtering, Port Filtering, Forwarding, Port Triggers, DMZ Host, and RIP Setup. The main content area is titled "Advanced" and describes the "Routing Information Protocol Setup". It states that this page allows configuration of RIP parameters related to authentication, destination IP address/subnet mask, and reporting intervals. RIP automatically identifies and uses the best known and quickest route to any given destination address. The configuration section includes fields for RIP Support (set to "Disabled"), RIP Authentication (checked "Enable"), RIP Authentication Key (empty input field), RIP Authentication Key ID (value "0"), RIP Reporting Interval (value "30 seconds"), and RIP Destination IP Address (four input fields showing "0.0.0.0"). An "Apply" button is located below these fields. At the bottom of the page, a copyright notice reads "© - Technicolor - 2011".

Fig.2-25 Gateway\Advanced\RIP Setup


Gateway – Firewall Web Page Group

1. Web Content Filtering

These pages allow you to enable, disable, and configure a variety of firewall features associated with web browsing, which uses the HTTP protocol and transports HTML web pages. On these pages, you designate the gateway packet types you want to have forwarded or blocked. You can activate settings by checking them and clicking Apply.

The web-related filtering features you can activate from the Web Content Filter page include Filter Proxy, Filter Cookies, Filter Java Applets, Filter ActiveX, Filter Popup Windows, and Firewall Protection.

If you want the gateway to exclude your selected filters to certain computers on your LAN, enter their MAC addresses in the Trusted Computers area of this page.

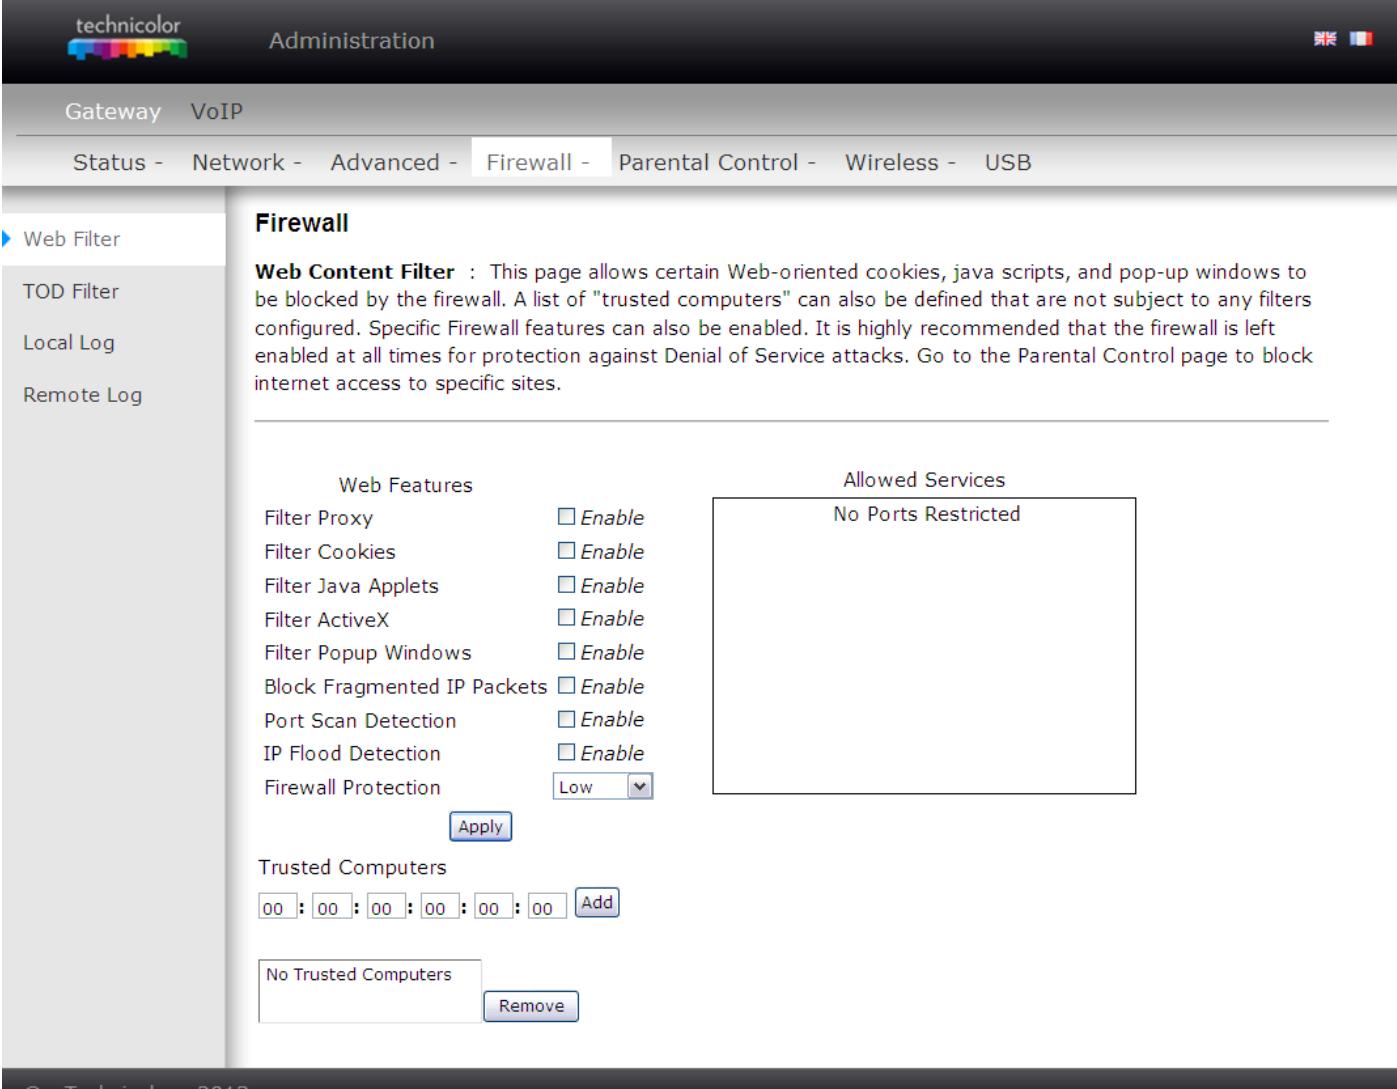

Web Features

Filter Proxy	<input type="checkbox"/> Enable
Filter Cookies	<input type="checkbox"/> Enable
Filter Java Applets	<input type="checkbox"/> Enable
Filter ActiveX	<input type="checkbox"/> Enable
Filter Popup Windows	<input type="checkbox"/> Enable
Block Fragmented IP Packets	<input type="checkbox"/> Enable
Port Scan Detection	<input type="checkbox"/> Enable
IP Flood Detection	<input type="checkbox"/> Enable
Firewall Protection	<input type="checkbox"/> Low <input type="button" value="▼"/>

Allowed Services

No Ports Restricted

Trusted Computers


00 : 00 : 00 : 00 : 00 : 00

No Trusted Computers

Fig.2-26 Gateway\Firewall\Web Filter

2. TOD Filtering

Use this page to set rules that will block specific LAN side PCs from accessing the Internet, but only at specific days and times. Specify a PC by its hardware MAC address, and then use the tools to specify blocking time. Finally, click the Apply button to save your settings.

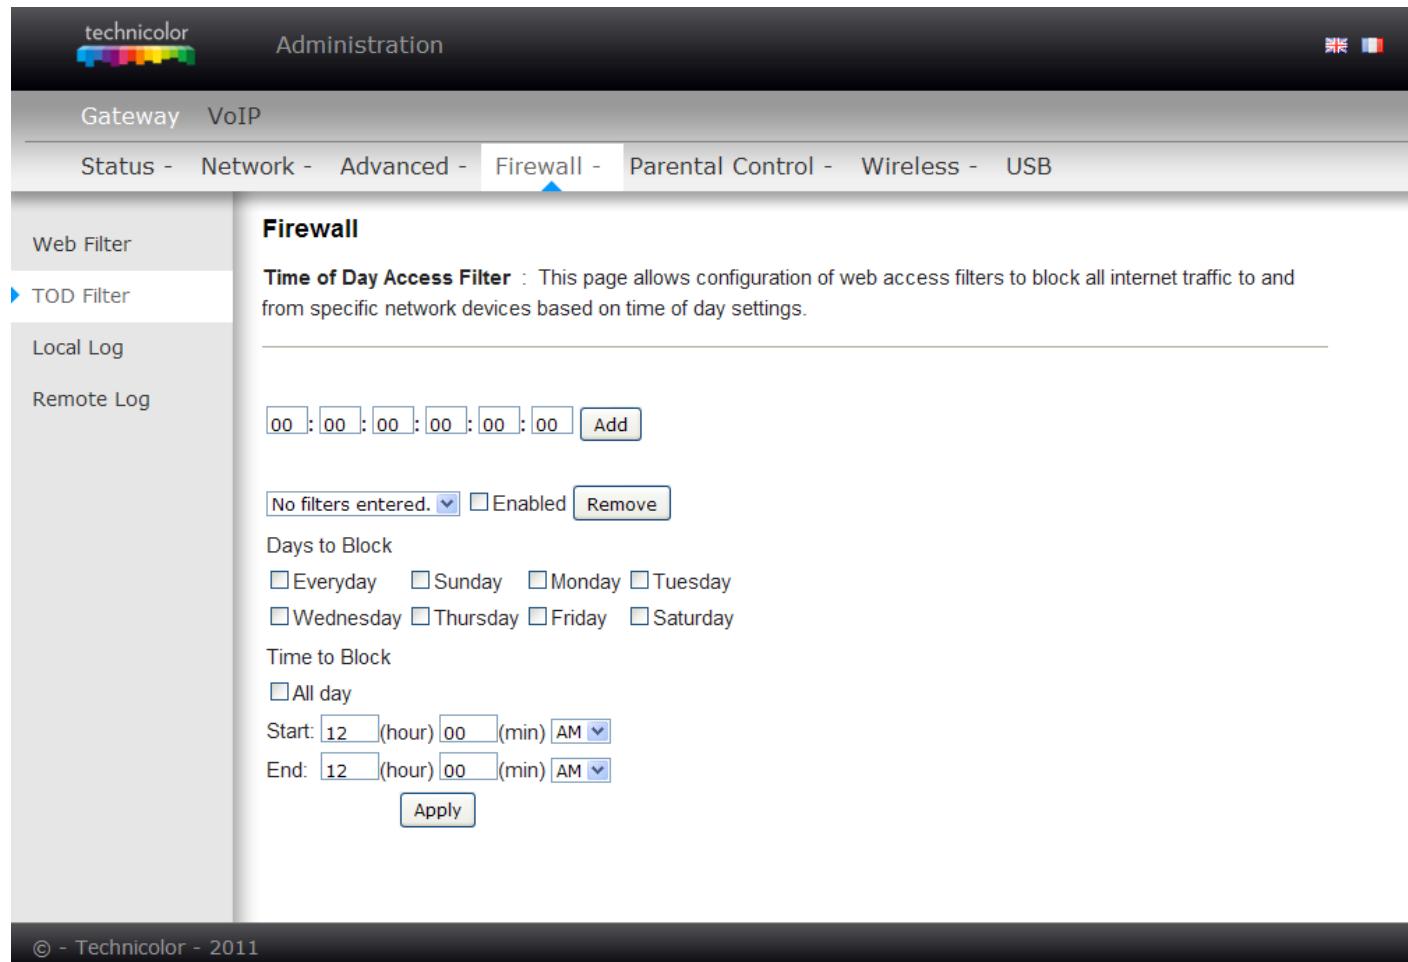

Firewall

Time of Day Access Filter : This page allows configuration of web access filters to block all internet traffic to and from specific network devices based on time of day settings.

00 : 00 : 00 : 00 : 00 : 00

No filters entered.

Days to Block

Everyday Sunday Monday Tuesday
 Wednesday Thursday Friday Saturday

Time to Block

All day

Start: (hour) (min)

End: (hour) (min)


© - Technicolor - 2011

Fig.2-27 Gateway\Firewall\TOD Filtering

3. Local Log

The gateway builds a log of firewall blocking actions that the firewall has taken. Using the Local Log page lets you specify an email address to which you want the gateway to email this log. You must also tell the gateway your outgoing (i.e. SMTP) email server's name, so it can direct the email to it. Enable Email Alerts has the gateway forward email notices when Firewall protection events occur. Click **E-mail Log** to immediately send the email log. Click **Clear Log** to clear the table of entries for a fresh start.

The log of these events is also visible on the screen. For each blocking event type that has taken place since the table was last cleared, the table shows Description, Count, Last Occurrence, Target, and Source.

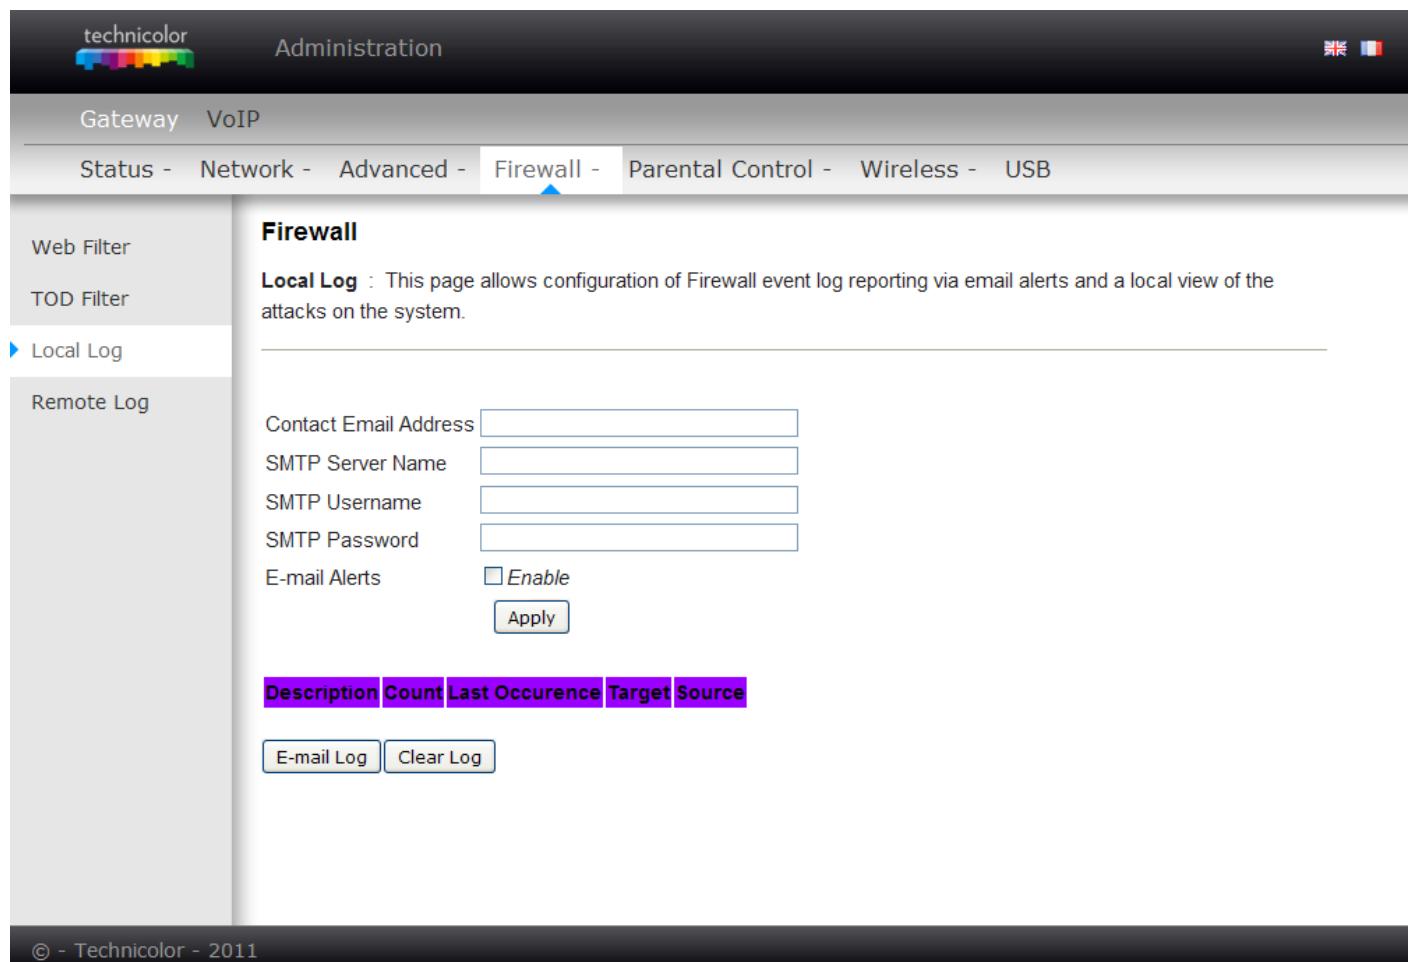

The screenshot shows the 'Administration' interface of a Technicolor gateway. The top navigation bar includes links for 'Gateway', 'VoIP', 'Status -', 'Network -', 'Advanced -', 'Firewall -' (which is currently selected), 'Parental Control -', 'Wireless -', and 'USB'. On the left, a sidebar lists 'Web Filter', 'TOD Filter', and 'Local Log' (with a blue arrow icon). Under 'Local Log', there is a 'Remote Log' section. The main content area is titled 'Firewall' and contains the following configuration fields:


- Contact Email Address:** An input field.
- SMTP Server Name:** An input field.
- SMTP Username:** An input field.
- SMTP Password:** An input field.
- E-mail Alerts:** A checkbox labeled 'Enable'.
- Apply:** A button to save changes.

Below these fields is a table header with the following columns: **Description**, **Count**, **Last Occurrence**, **Target**, and **Source**. At the bottom of the page are two buttons: **E-mail Log** and **Clear Log**.

Fig.2-28 Gateway\Firewall\Local Log

4. Remote Log

The Remote Log page allows you to specify the IP address where a SysLog server is located on the LAN Side and select different types of firewall events that may occur. Then, each time such an event occurs, notification is automatically sent to this log server.

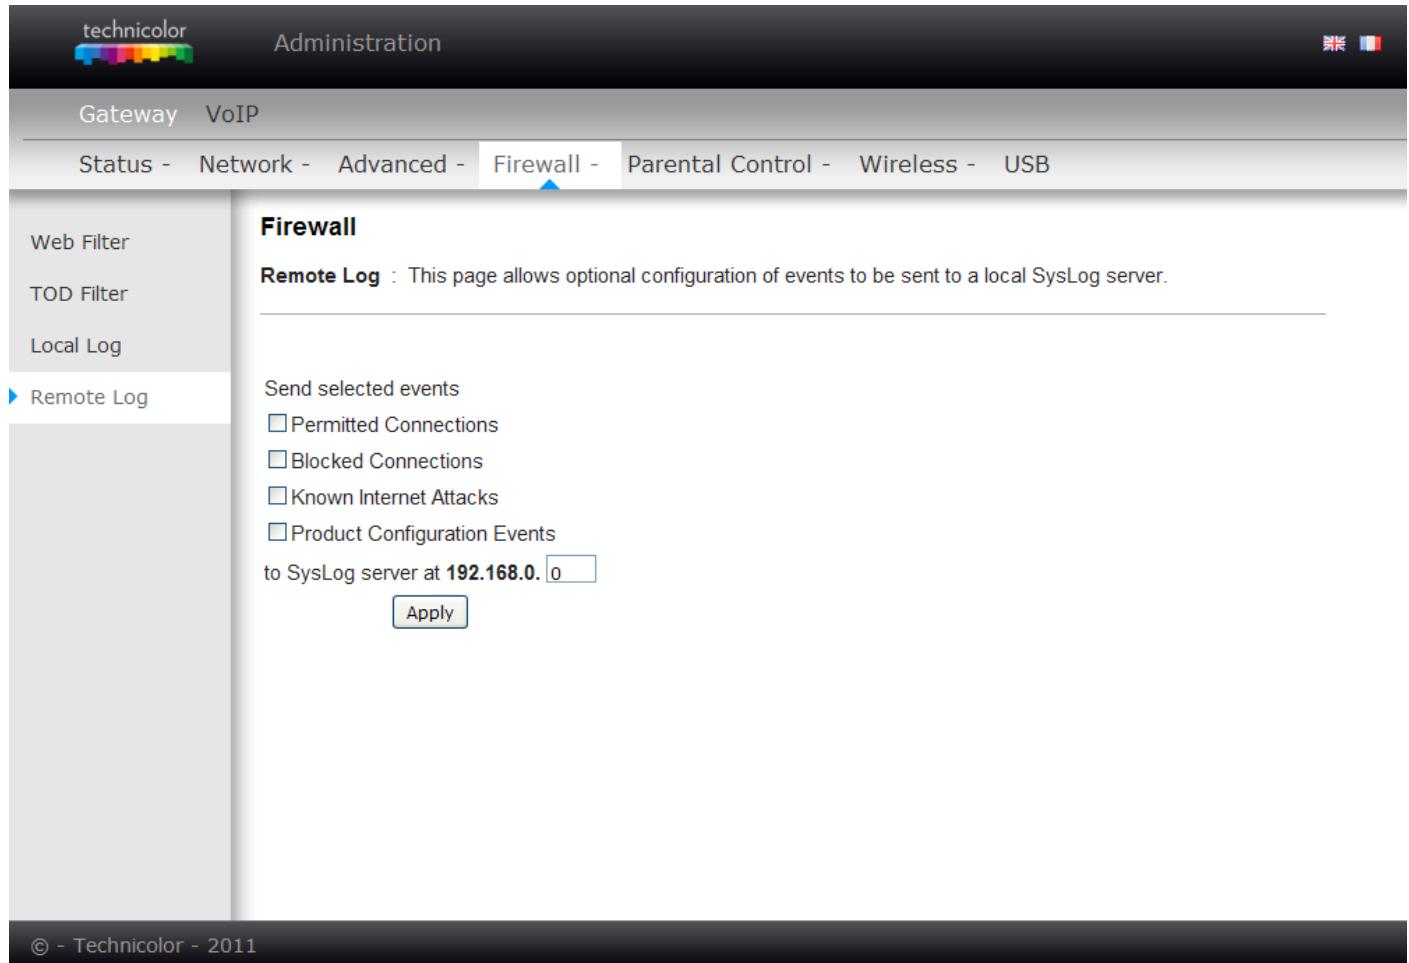

The screenshot shows the 'Administration' interface of a Technicolor gateway. The top navigation bar includes links for 'Gateway', 'VoIP', 'Status', 'Network', 'Advanced', 'Firewall' (which is currently selected), 'Parental Control', 'Wireless', 'USB', and language options ('EN', 'FR'). On the left, a sidebar lists 'Web Filter', 'TOD Filter', 'Local Log', and '▶ Remote Log'. The main content area is titled 'Firewall' and contains the 'Remote Log' configuration. It states: 'This page allows optional configuration of events to be sent to a local SysLog server.' Below this, under 'Send selected events', there are four checkboxes: 'Permitted Connections', 'Blocked Connections', 'Known Internet Attacks', and 'Product Configuration Events'. A text input field shows 'to SysLog server at 192.168.0.0'. At the bottom right is an 'Apply' button. The footer of the page reads '© - Technicolor - 2011'.

Fig.2-29 Gateway\Firewall\Remote Log

Gateway – Parental Control Web Page Group

1. Basic

This page allows you to enable, disable, and configure a variety of firewall features associated with web browsing, which uses the HTTP protocol and transports HTML web pages. On these pages, you designate the gateway packet types you want to have forwarded or blocked. You can activate settings by checking them and clicking Apply.

Here are some of your choices on the Parental Control page:

- Activate **Keyword Blocking** and specify some keywords in the Keyword List to cause blocking of web pages on the WAN side with the specified keyword in the content.
- Activate **Domain Blocking** and specify some Domain Names (e.g. www.ABC.com) in the Domain List.

The screenshot shows the 'Parental Control' section of the Technicolor Gateway configuration interface. At the top, there's a navigation bar with tabs for Status, Network, Advanced, Firewall, **Parental Control**, Wireless, and USB. Below the tabs, a sub-navigation bar shows 'Basic' selected under 'Parental Control'. The main content area is titled 'Parental Control' and contains the following sections:

- Content Filtering**: Includes 'Keyword Blocking' and 'Domain Blocking' options, each with an 'Enable' checkbox.
- Keyword List**: A text input field with an 'Add Keyword' button below it, and a 'Remove Keyword' button below that.
- Blocked Domain List**: A text input field with an 'Add Domain' button below it, and a 'Remove Domain' button below that.

At the bottom left, a copyright notice reads '© - Technicolor - 2011'.

Fig.2-30 Gateway\Parental Control\Basic

Gateway – Wireless Web Page Group

The Wireless web pages group enables a variety of settings that can provide secure and reliable wireless communications for even the most demanding tech-savvy user.

The Wireless Voice Gateway offers a choice of 802.11b/g/n, WPA and WPA-PSK authentication of your PCs to the gateway, 64 and 128 bit WEP encryption of communication between the gateway and your PCs to guaranty security, and an Access Control List function that enables you to restrict wireless access to only your specific PCs.

Performance

Because your wireless communication travels through the air, the factory default wireless channel setting may not provide optimum performance in your home if you or your neighbors have other interfering 2.4GHz or 5 GHz devices such as cordless phones. If your wireless PC is experiencing very sluggish or dramatically slower communication compared with the speed you achieve on your PC that is wired to the gateway, try changing the channel number. See the 802.11b/g/n Basic Web Page discussion below for details.

Authentication

Authentication enables you to restrict your gateway from communicating with any remote wireless PCs that aren't yours. The following minimum authentication-related changes to factory defaults are recommended. See the 802.11b/g/n Basic and Access Control Web Page discussions below for details.

Network Name (SSID) – Set a unique name you choose

Network Type – Set to Open

Access Control List – Enter your wireless PCs' MAC addresses

Security

Security secures or scrambles messages traveling through the air between your wireless PCs and the gateway, so they can't be observed by others. The following minimum security setting changes to factory defaults are recommended. See the 802.11b/g/n Security Web Page discussion below for details.

1. Radio

To set the basic configuration for the wireless features, click RADIO from the Wireless menu. These must match the settings you make on your wireless-equipped PC on the LAN side.

The screenshot shows the technicolor Administration interface. The top navigation bar includes links for Gateway, VoIP, Status, Network, Advanced, Firewall, Parental Control, Wireless (which is currently selected), and USB. The left sidebar has a 'Radio' section with links for Primary Network, Access Control, Advanced, Bridging, and WMM. The main content area is titled 'Wireless' and contains the '802.11 Radio' configuration page. It displays various settings such as Interface (Enabled), Wireless MAC Address (8C:04:FF:12:98:15), Output Power (100%), 802.11 Band (2.4 Ghz), 802.11 n-mode (Auto), 802.11 N Support Required (Off), Bandwidth (20 Mhz), Sideband for Control Channel (40 Mhz only) (None), Channel (1), Current Channel (1), Interference Level (Acceptable), Regulatory Mode (Off), TPC Mitigation (db) (0 (Off)), OBSS Coexistence (1 (Enabled)), and STBC Tx (Auto). At the bottom are three buttons: 'Apply', 'Restore Wireless Defaults', and 'Scan Wireless APs'. The footer of the interface includes the copyright notice '© - Technicolor - 2013'.

Fig.2-31 Gateway\Wireless\Radio

- **Interface:** The wireless radio in your gateway can be completely de-activated by changing **Interface** to Disabled. Click the **Apply** button to save your settings. Activated by changing interface to enabled
- **Wireless MAC Address:** The MAC address for this wireless device will be displayed in this field automatically.
- **Output Power:** This setting decides the output power of this device. You may use it to economize on electricity by selecting lower percentage of power output. Control the range of the AP by adjusting the radio output power.
- **802.11 Band:** It Support 2.4 GHz and 5 GHz band. This default band was 2.4 GHz.
- **802.11 n-mode:** It may help you to **Enable** or **Disable** the 11N mode. To enable you need to select **Auto**, to disable you need to select **Off**, and so force the AP to operate in 802.11 n-mode.
- **Bandwidth:** Select wireless channel width **20 MHz** is for default value (bandwidth taken by wireless signals of this access point.)
- **Sideband for Control Channel (40 MHz only):** There is “Lower” and “Upper” can be selected if

Bandwidth 40 MHz was Enabled.


- **Control Channel:** There are 1 to 13 channels that you can choose. Choose the one that is suitable for this device.
- **Current Channel:** The channel that you choose will be displayed in this field.
- **Regulatory Mode:** suppose 802.11d and 802.11h to satisfy specific environment and request.
- **TPC Mitigation (db):** Fixed Maximum TX Power Level, options 0 ~ 4 db
- **OBSS Coexistence:** Overlapping BBS coexistence, here to control this function Enable or Disable, default was enabled.
- **Restore Wireless defaults:** To recover to the default settings, press this button to retrieve the settings then click Apply.

Setting	Description	Value List or Range	Default
Network Name (SSID)	Set the Network Name (also known as SSID) of this network.	Up to 32-character string containing ASCII characters only	TECHNICOLOR
Network Type	Select Closed to hide the network from active scans. Select Open to reveal the network to active scans.	Open, Closed	Open
New Channel	Select a particular channel on which to operate.	1-13	1 or 6 or 11
Interface	Enable or disable the wireless interface.	Enabled, Disabled	Enabled

Table. 2-1 Basic Settings Definitions

2. Primary Network

This page allows you to configure the Network Authentication. It provides several different modes of wireless security. You will have to enter proper information according to the mode you select.

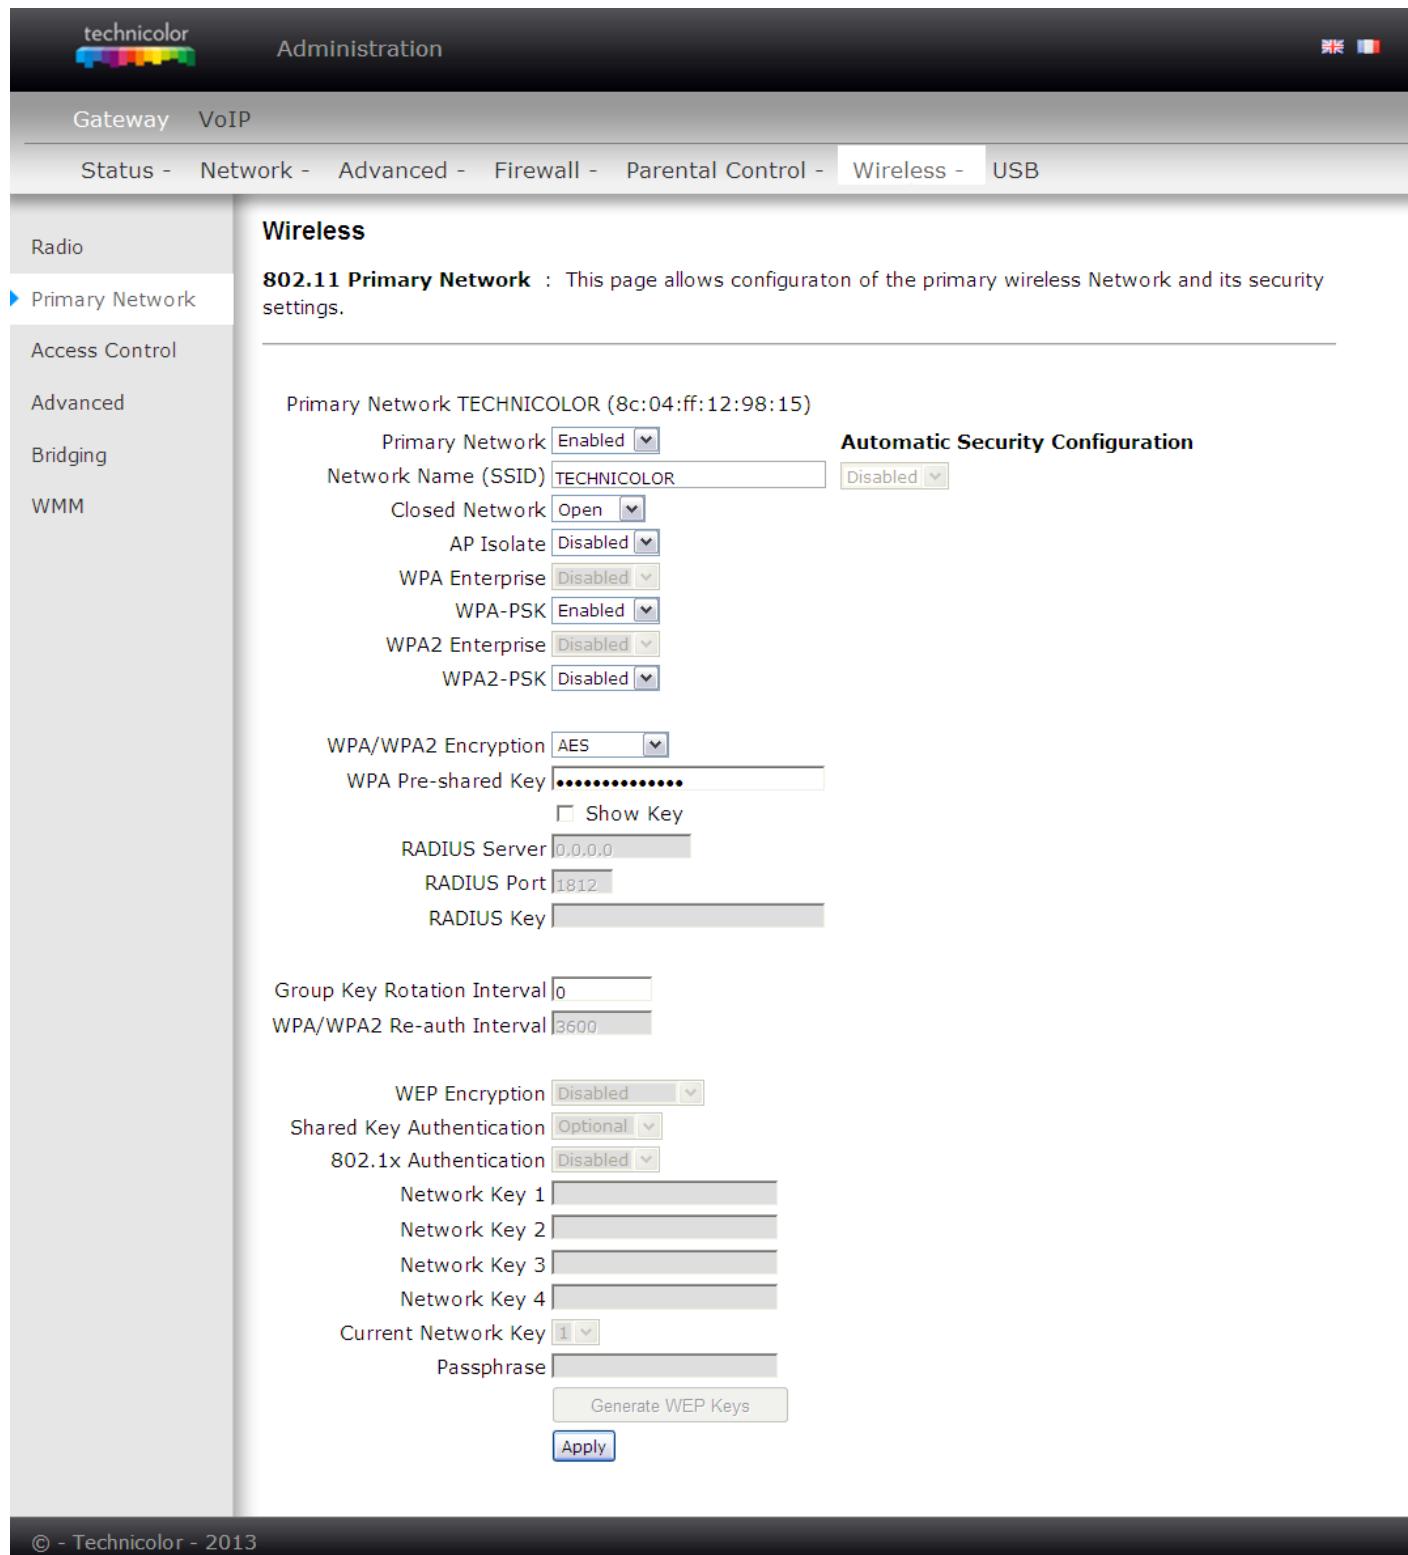

The screenshot shows the 'Wireless' configuration page for the 'Primary Network'. The left sidebar lists 'Radio', 'Primary Network' (which is selected and highlighted in blue), 'Access Control', 'Advanced', 'Bridging', and 'WMM'. The main content area is titled '802.11 Primary Network' and describes it as a configuration page for the primary wireless network and its security settings. It displays various security options and their current status:

- Primary Network:** Enabled (dropdown menu)
- Network Name (SSID):** TECHNICOLOR (text input field)
- Automatic Security Configuration:** Disabled (dropdown menu)
- Closed Network:** Open (dropdown menu)
- AP Isolate:** Disabled (dropdown menu)
- WPA Enterprise:** Disabled (dropdown menu)
- WPA-PSK:** Enabled (dropdown menu)
- WPA2 Enterprise:** Disabled (dropdown menu)
- WPA2-PSK:** Disabled (dropdown menu)
- WPA/WPA2 Encryption:** AES (dropdown menu)
- WPA Pre-shared Key:** (text input field containing a masked password)
- Show Key:** (checkbox)
- RADIUS Server:** 0.0.0.0 (text input field)
- RADIUS Port:** 1812 (text input field)
- RADIUS Key:** (text input field)
- Group Key Rotation Interval:** 0 (text input field)
- WPA/WPA2 Re-auth Interval:** 3600 (text input field)
- WEP Encryption:** Disabled (dropdown menu)
- Shared Key Authentication:** Optional (dropdown menu)
- 802.1x Authentication:** Disabled (dropdown menu)
- Network Key 1:** (text input field)
- Network Key 2:** (text input field)
- Network Key 3:** (text input field)
- Network Key 4:** (text input field)
- Current Network Key:** 1 (dropdown menu)
- Passphrase:** (text input field)
- Generate WEP Keys:** (button)
- Apply:** (button)

© - Technicolor - 2013

Fig. 2-32 Gateway\Wireless\Primary Network

802.11x Authentication introduction

If you enable the **802.11x authentication** function, you will have to offer the following information-

- **WPA (Wi-Fi Protected Access)/WPA2:**
It must be used in conjunction with an authentication server such as RADIUS to provide centralized access control and management. It can provide stronger encryption and authentication solution than none WPA modes. **WPA2** is the second generation of **WPA** security.
- **WPA-PSK (WPA-Pre-Shared Key) /WPA2-PSK (WPA2-Pre-Shared Key):**
It is useful for small places without authentication servers such as the network at home. It allows the use of manually-entered keys or passwords and is designed to be easily set up for home users.
- **RADIUS Server:** RADIUS Server is a protocol for carrying authentication, authorization, and configuration information between a Network Access Server which desires to authenticate its links and a shared Authentication Server. Please key in the IP Address for the RADIUS Server.
- **RADIUS Port:** Besides the IP address of the RADIUS Server, you have to enter the port number for the server. Port 1812 is the reserved RADIUS-authentication port described in RFC 2138. Earlier AP (RADIUS clients) use port 1945. The default value will be shown on this box. You can keep and use it.
- **RADIUS Key:** A RADIUS Key is like a password, which is used between IAS and the specific RADIUS client to verify identity. Both IAS and the RADIUS client must be use the same RADIUS Key for successful communication to occur. Enter the RADIUS Key.

■ WPA/WPA2:

For the WPA/WPA2 network Authentication, the settings that you can adjust including WPA/WPA2 Encryption, RADIUS Server, RADIUS Port, RADIUS Key, Group Key Rotation Interval, and WPA/WPA2 Re-auth Interval.

- **WPA/WPA2 Encryption:**

There are two types that you can choose, **AES**, **TKIP+AES**.

TKIP takes the original master key only as a starting point and derives its encryption keys mathematically from this master key. Then it regularly changes and rotates the encryption keys so that the same encryption key will never be used twice

AES provides security between client workstations operating in ad hoc mode. It uses a mathematical ciphering algorithm that employs variable key sizes of 128, 192 or 256 bits.

- **RADIUS Server/RADIUS Port/RADIUS Key:**

Please refer to the previous page.

- **Group Key Rotation Interval:**

Key in the time for the WAP group key rotation interval. The unit is second. With increasing rekey interval, user bandwidth requirement is reduced.

- **WPA/WPA2 Re-auth Interval:**

When a wireless client has associated with the Wireless Voice Gateway for a period of time longer than the setting here, it would be disconnected and the authentication will be executed again. The default value is 3600, you may modify it.

<input style="width: 150px; height: 25px; border: 1px solid #ccc; padding: 2px; margin-bottom: 5px;" type="button" value="WPA Enabled"/> <input style="width: 150px; height: 25px; border: 1px solid #ccc; padding: 2px; margin-bottom: 5px;" type="button" value="WPA-PSK Disabled"/> <input style="width: 150px; height: 25px; border: 1px solid #ccc; padding: 2px; margin-bottom: 5px;" type="button" value="WPA2 Enabled"/> <input style="width: 150px; height: 25px; border: 1px solid #ccc; padding: 2px;" type="button" value="WPA2-PSK Disabled"/>
WPA/WPA2 Encryption <input style="width: 150px; height: 25px; border: 1px solid #ccc; padding: 2px; margin-bottom: 5px;" type="button" value="TKIP+AES"/> WPA Pre-Shared Key <input style="width: 400px; height: 25px; border: 1px solid #ccc; padding: 2px; margin-bottom: 5px;" type="text" value="*****"/> <div style="display: flex; align-items: center;"> <input style="margin-right: 5px;" type="checkbox"/> Show Key </div>
RADIUS Server <input style="width: 150px; height: 25px; border: 1px solid #ccc; padding: 2px; margin-bottom: 5px;" type="text" value="0.0.0.0"/> RADIUS Port <input style="width: 150px; height: 25px; border: 1px solid #ccc; padding: 2px; margin-bottom: 5px;" type="text" value="1812"/> RADIUS Key <input style="width: 150px; height: 25px; border: 1px solid #ccc; padding: 2px;" type="text"/>
Group Key Rotation Interval <input style="width: 150px; height: 25px; border: 1px solid #ccc; padding: 2px; margin-bottom: 5px;" type="text" value="0"/> WPA/WPA2 Re-auth Interval <input style="width: 150px; height: 25px; border: 1px solid #ccc; padding: 2px;" type="text" value="3600"/>


Fig. 2-33 WPA/WPA2

■ WPA-PSK/ WPA2-PSK:

For the WPA-PSK/WPA2-PSK network Authentication, the settings that you can adjust including WPA/WPA2 Encryption, WPA Pre-Shared Key, and Group key Rotation Interval.

● WPA Pre-Shared Key:

Please type the key to be between 8 and 63 characters, or 64 hexadecimal digits. Only the devices with a matching key that you set here can join this network.

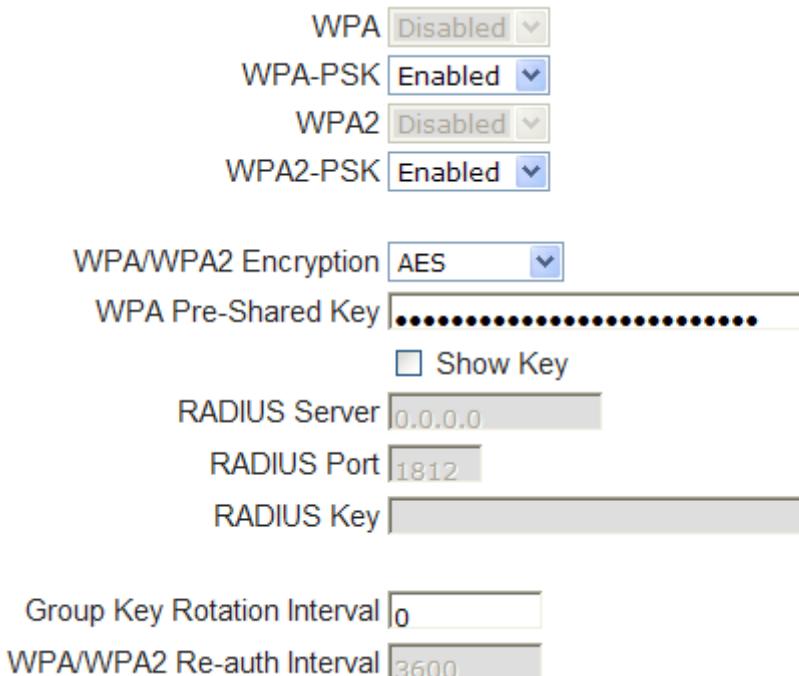

WPA

WPA-PSK

WPA2

WPA2-PSK

WPA/WPA2 Encryption

WPA Pre-Shared Key

Show Key

RADIUS Server

RADIUS Port

RADIUS Key

Group Key Rotation Interval

WPA/WPA2 Re-auth Interval

Fig. 2-34 WPA-PSK/WPA2-PSK

■ WEP Encryption:

You can choose **64-bit** or **128-bit** according to your needs. If you choose **Disabled**, the Network Keys will not be shown on this page. If selected, the data is encrypted using the key before being transmitted. e.g., If you set 128-bit in this field, then the receiving station must be set to use the 128 Bit Encryption, and have the same Key value too. Otherwise, it will not be able to decrypt the data.

(Note: You need to connect one end of the Ethernet cable to the Ethernet port on the back of your computer, and the other end to the ETHERNET port on the Wireless Voice Gateway.)

If you select WEP (**64-bit** or **128-bit**), you can adjust the following settings-

- **Shared Key Authentication:**

Decide whether to set the shared key **Optional** or **Required** by selecting from the drop-down menu.

- **Network Key 1 to 4:**

The system allows you to enter four sets of the WEP key. For **64-bit** WEP mode, the key length is 5 characters or 10 hexadecimal digits. As for **128-bit** WEP mode, the key length is 13 characters or 26 hexadecimal digits.

- **Current Network Key:**

Select one set of the network key (from 1 to 4) as the default one.

- **Passphrase:**

You can enter ASCII codes into this field. The range is from 8 characters to 64 characters. For **ASCII characters**, you can key in **63** characters in this field. If you want to key in **64** characters, only **hexadecimal characters** can be used.

- **Generate WEP Keys:**

Click this button to generate the Passphrase.

- **Apply:**

After proper configuration, click Apply to invoke the settings.

WEP Encryption	WEP (128-bit) 
Shared Key Authentication	Optional 
802.1x Authentication	Disabled 
Network Key 1	000000000000000000000000
Network Key 2	000000000000000000000000
Network Key 3	000000000000000000000000
Network Key 4	000000000000000000000000
Current Network Key	1 
PassPhrase	
Generate WEP Keys	
Apply	

Fig. 2-35 WEP (64-bit) / WEP (128-bit)



3. Access Control

This page allows you to make access control to the AP or connected clients by offering the MAC Addresses of the clients.

The screenshot shows the 'Wireless' section of the Technicolor Gateway's administration interface. On the left, a sidebar lists 'Radio', 'Primary Network', 'Access Control' (which is selected and highlighted in blue), 'Advanced', 'Bridging', and 'WMM'. The main content area has a title 'Wireless' and a sub-section '802.11 Access Control'. It states: 'This page allows the configuration of the Access Control to the AP as well as status on the connected clients.' Below this, there is a dropdown menu for 'Administration Web Page Access' set to 'Allow'. A note says '(Allow or Deny Access to Administration Web Page from PC connected over Wifi.)'. Under 'MAC Restrict Mode', a dropdown is set to 'Disabled'. There is a table for entering MAC addresses, with eight rows available. An 'Apply' button is located below the table. At the bottom, a table titled 'Connected Clients' shows columns for MAC Address, Age(s), RSSI(dBm), Type, IP Addr, and Host Name. A message indicates 'No wireless clients are connected.' The footer of the page includes the copyright notice '© - Technicolor - 2011'.

Fig. 2-36 Gateway\Wireless\Access Control

- **MAC Restrict Mode:** Click **Disabled** to welcome all of the clients on the network; select **Allow** to permit only the clients on the list to access the cable modem; or choose **Deny** to prevent the clients on the list to access this device.
- **MAC Address:** Your Gateway identifies wireless PCs by their Wireless MAC Address. This address consists of a string of 6 pairs of numbers 0-9 and letters A-F, such as 00 90 4B F0 FF 50. It is usually printed on the Wireless card of the device (e.g. the PCMCIA card in a laptop).
- Enter the MAC addresses of the connected clients into the fields, and then click **Apply** to add them to the list for access control.
- **Apply:** After proper configuration, click **Apply** to invoke the settings.
- **Connected Clients:** The information of currently connected clients will be displayed here.



4. Advanced

This page allows you to configure some advanced settings. The factory default values should provide good results in most cases. We don't recommend you change these settings unless you have technical knowledge of 802.11 wireless technology.

For expert users, details of all settings on this web page are provided below.

The screenshot shows the 'Wireless' configuration page under the 'Advanced' tab. On the left sidebar, 'Advanced' is expanded, showing options like Bridging and WMM. The main area displays various wireless parameters:

- 54g™ Mode: 54g Auto
- XPress™ Technology: Disabled
- 802.11n Protection: Auto
- Short Guard Interval: Auto
- Basic Rate Set: Default
- Multicast Rate: Auto
- NPHY Rate: Auto
- Rate: Auto
- Beacon Interval: 100
- DTIM Interval: 1
- Fragmentation Threshold: 2346
- RTS Threshold: 2347

An 'Apply' button is at the bottom right of the form.

Fig. 2-37 Gateway\Wireless\Advanced

- **54™ Mode:** Except Auto mode, there are three modes for you choose, please check the specification of your wireless card and choose a proper setting.
- **Xpress™ Technology:** When Xpress is turned on, aggregate throughput (the sum of the individual throughput speeds of each client on the network) can improve by up to 27% in 802.11g-only networks, and up to 75% in mixed networks comprised of 802.11g and 802.11b standard equipment.
- **802.11n Protection:** This method provides 802.11g and 802.11b devices can co-exist in the same network without “speaking” at the same time. Default is “Auto”.
- **Basic Rate Set:** The rates that for all clients want to associate with. Choose “Default” or “All” for the 802.11 b/g/n.
- **Multicast Rate:** The baseline levels that wireless device able to deliver in order to connect to the wireless voice gateway. Lower multicast rates mean weaker, farther signals are allowed to connection. Higher multicast rates mean that only close, strong signals are allowed.
- **NPHY Rate:** Set the Physical Layer rate. The rate always set “Use Legacy Rate”.

- **Rate:** It decides the speed of data transmission. There are several rates provided here for you to choose. Choose any one of it according to your needs by using the drop-down menu.
- **Beacon Interval:** Set the period of beacon transmissions to allow mobile stations to locate and identify a BSS. The measure unit is “time units” (TU) of 1024 microseconds. (Value range: 1~65535)
- **DTIM Interval:** The value you set here is used to inform mobile stations when multicast frames that have been buffered at the Wireless Voice Gateway will be delivered and how often that delivery occurs. (Value range: 1~255)
- **Fragmentation Threshold:** Set the number of the fragmenting frames to make the data to be delivered without errors induced by the interference. Frames longer than the value you set here are fragmented before the initial transmission into fragments no longer than the value of the threshold. (Value range: 256~ 2346)
- **RTS Threshold:** Set the value for sending a request to the destination. All the frames of a length greater than the threshold that you set here will be sent with the four-way frame exchange. And, a length less than or equal to the value that you set will not be proceeded by RTS. (Value range: 0~ 2347)

5. Bridging

The Bridging page provides a location where settings can be adjusted related to the WDS (**Wireless Distribution System**) feature.

WDS is a system that enables the interconnection of access points wirelessly. It may also be referred to as repeater mode because it appears to bridge and accept wireless clients at the same time (unlike traditional bridging).

The wireless gateway can be placed in a mode that allows the gateway to communicate with other “extender” wireless access points either exclusively or mixed with communications to local PCs. Use this page to designate the Remote Bridges the gateway is allowed to communicate with, and to select the Wireless Bridging mode.

The screenshot shows the 'Administration' interface of a Technicolor gateway. The top navigation bar includes links for 'Gateway', 'VoIP', 'Status', 'Network', 'Advanced', 'Firewall', 'Parental Control', 'Wireless' (which is highlighted in blue), and 'USB'. The left sidebar has a tree view with nodes for 'Radio', 'Primary Network', 'Access Control', 'Advanced', 'Bridging' (which is expanded to show 'Remote Bridges'), and 'WMM'. The main content area is titled 'Wireless' and contains a sub-section titled 'Bridging'. The text states: 'Bridging : This page allows configuration of WDS features.' Below this, there is a dropdown menu set to 'Disabled' under 'Wireless Bridging', and four input fields labeled 'Remote Bridges' followed by four empty text boxes. A blue 'Apply' button is located at the bottom of this section. The footer of the page includes the copyright notice '© - Technicolor - 2011'.


Fig. 2-38 Gateway\Wireless\Bridging

- **Wireless Bridging:** Choose “Disabled” to shutdown this function; select Enabled to turn on the function of WDS.
- **Remote Bridges:** Enter the MAC Addresses of the remote Bridges to relay the signals for each other.
- **Apply:** After proper configuration, click Apply to invoke the settings.

6. 802.11e QoS (WMM) Settings

Wi-Fi Multimedia (WMM) is a component of the IEEE 802.11e wireless LAN standard for quality of service (QoS). The QoS assigns priority to the selected network traffic and prevents packet collisions and delays thus improving VoIP calls and watching video over WLANs.

- **Enable WMM:** This field allows you to enable WMM to improve multimedia transmission.
- **Enable WMM No-Acknowledgement:** This field allows you to enable WMM No-Acknowledgement.
- **Power Save Support:** This field allows you to enable WMM Power-Save-Support.

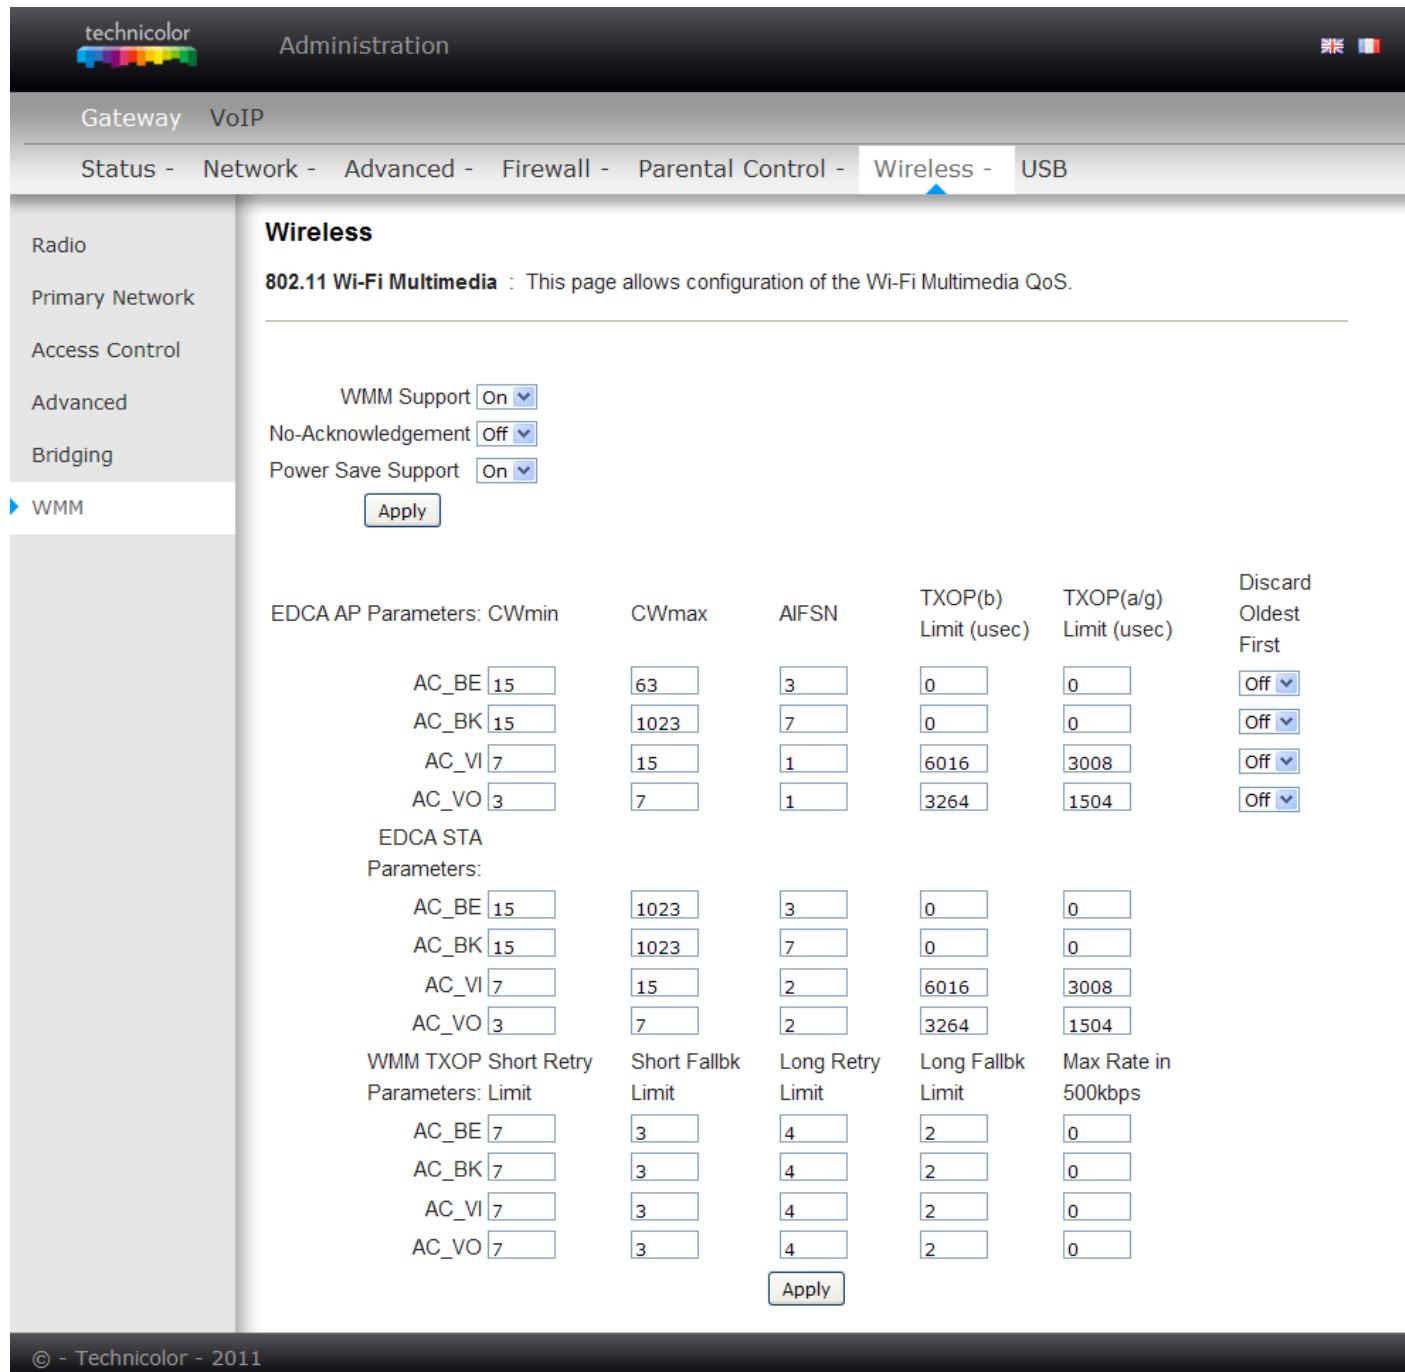

EDCA AP Parameters: CWmin					
	CWmax	AIFS	TXOP(b) Limit (usec)	TXOP(a/g) Limit (usec)	Discard Oldest First
AC_BE	15	63	3	0	Off
AC_BK	15	1023	7	0	Off
AC_VI	7	15	1	6016	Off
AC_VO	3	7	1	3264	Off

EDCA STA Parameters:					
AC_BE	15	1023	3	0	0
AC_BK	15	1023	7	0	0
AC_VI	7	15	2	6016	3008
AC_VO	3	7	2	3264	1504

WMM TXOP Short Retry Parameters: Limit				
	Short Fallbk Limit	Long Retry Limit	Long Fallbk Limit	Max Rate in 500kbps
AC_BE	7	3	4	0
AC_BK	7	3	4	0
AC_VI	7	3	4	0
AC_VO	7	3	4	0

Fig.2-39 Gateway\Wireless\WMM

Gateway – USB Web Page Group


1. USB Basic settings

This page allows basic control of the USB devices shared over the network.

Enable USB Devices connected to the USB port: Control the USB devices can be enabled, for all or approved one. “Approved Devices” button to Approve Devices page.

Enable USB Devices to be Shared Storage: Yes or No to decide if sharing storage. “Storage Configuration” button to Storage Basic page to set detail configuration.

Enable the Media Server (DLNA): DLNA, Digital Living Network Alliance. “Media Service Configuration” button to Media Server page.

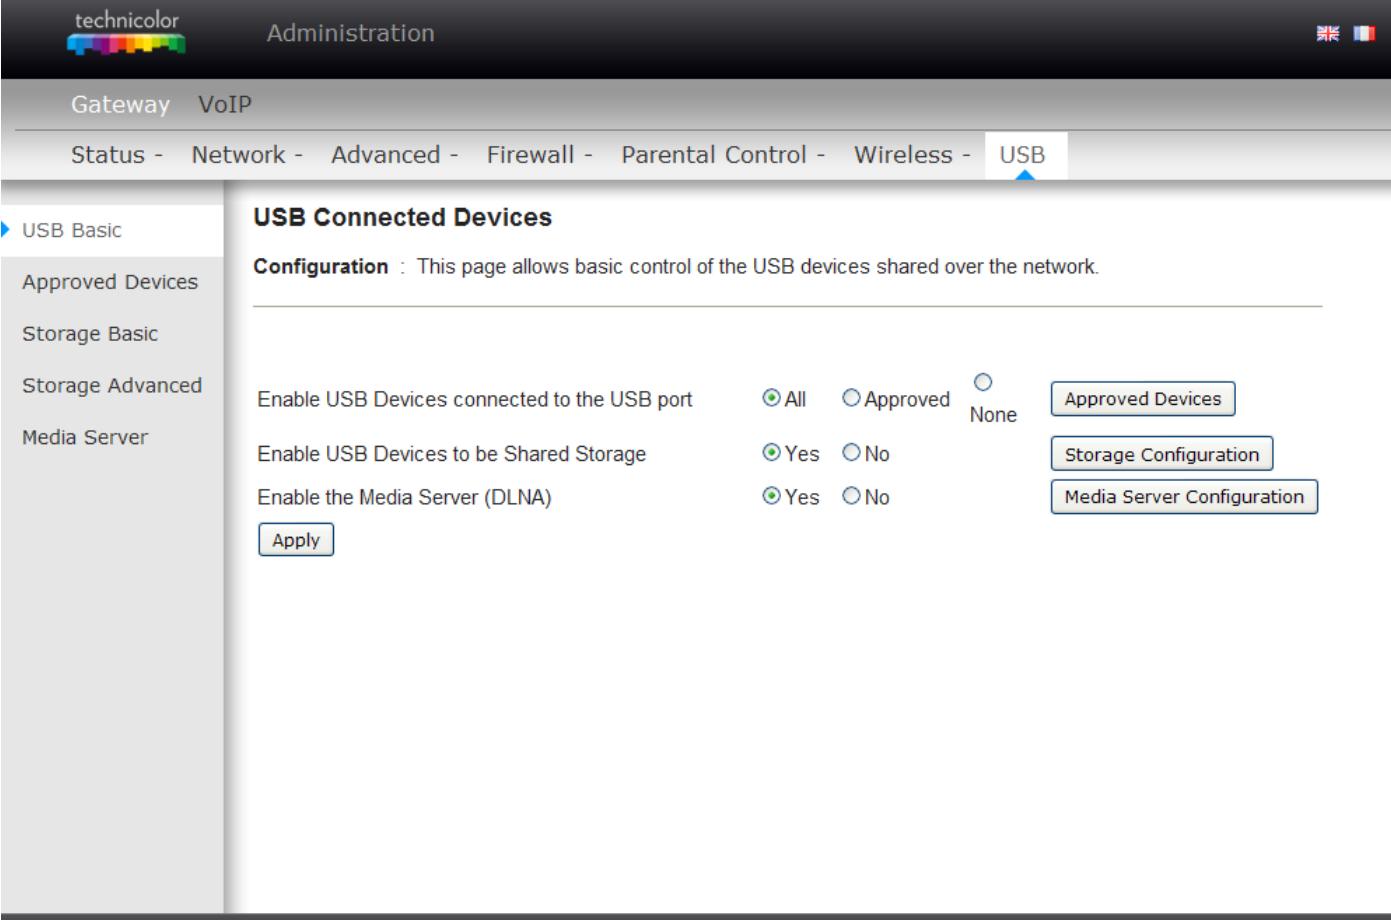

USB Connected Devices

Configuration : This page allows basic control of the USB devices shared over the network.

Enable USB Devices connected to the USB port	<input checked="" type="radio"/> All	<input type="radio"/> Approved	<input type="radio"/> None	Approved Devices
Enable USB Devices to be Shared Storage	<input checked="" type="radio"/> Yes	<input type="radio"/> No		Storage Configuration
Enable the Media Server (DLNA)	<input checked="" type="radio"/> Yes	<input type="radio"/> No		Media Server Configuration

Apply


© - Technicolor - 2011

Fig.2-40 Gateway/USB/USB Basic

2. Approved Devices settings

This page allows the configuration of the USB storage devices shared over the network.

Add Available USB Devices as Approved USB Devices then apply changes. If you want to remove USB devices, propose you press “Safely Remove Device” button first.

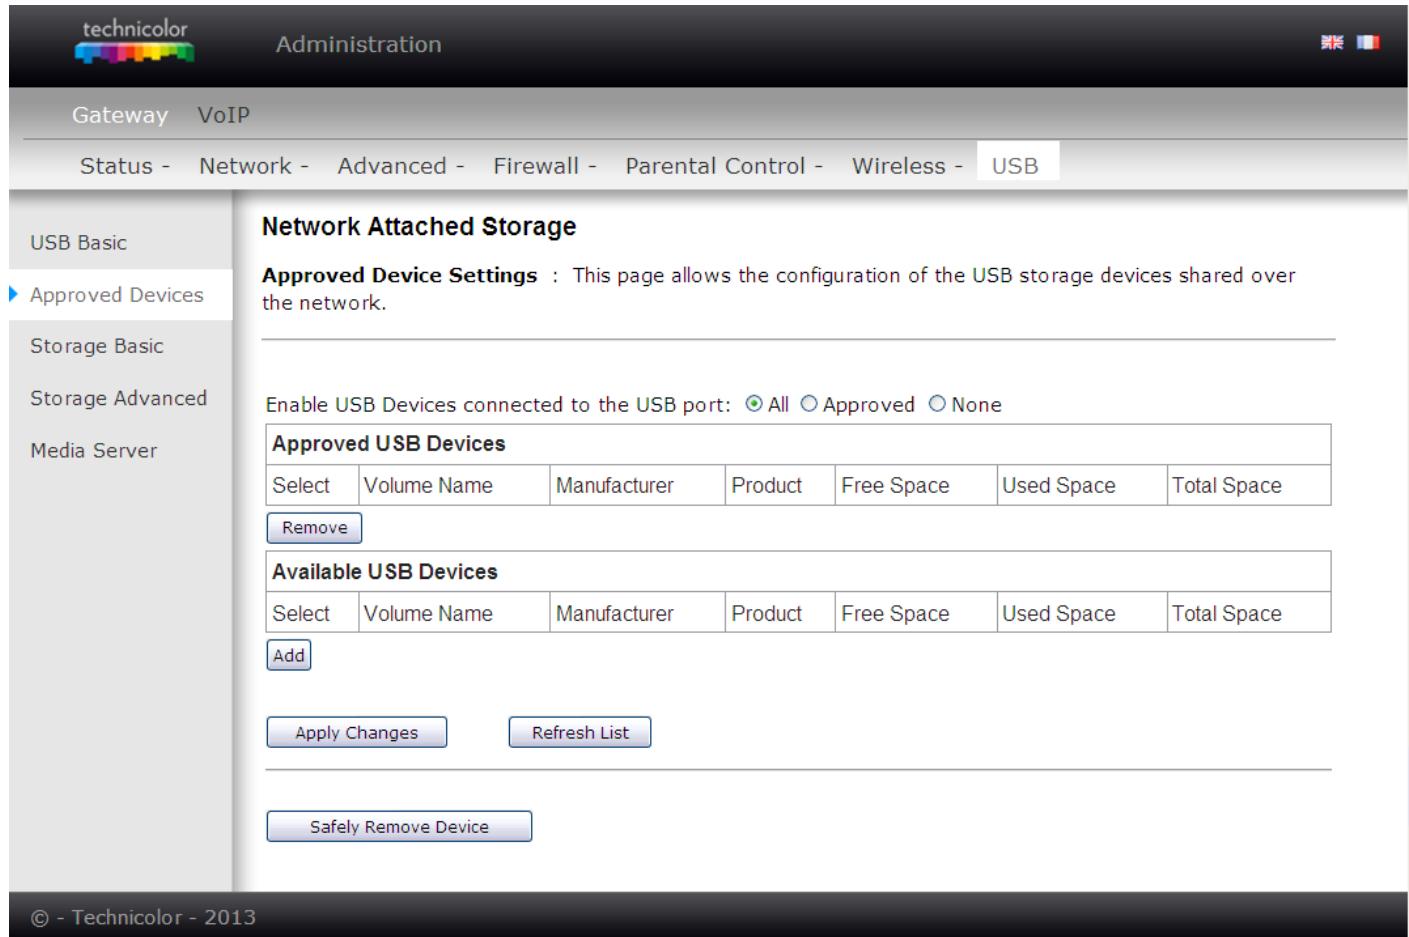

The screenshot shows the 'Administration' interface of a Technicolor router. The top navigation bar includes links for 'Gateway', 'VoIP', 'Status', 'Network', 'Advanced', 'Firewall', 'Parental Control', 'Wireless', and 'USB'. The 'USB' tab is currently selected. On the left, a sidebar lists 'USB Basic', 'Approved Devices' (which is selected), 'Storage Basic', 'Storage Advanced', and 'Media Server'. The main content area is titled 'Network Attached Storage' and contains the following sections:

- Approved Device Settings:** A note stating "This page allows the configuration of the USB storage devices shared over the network."
- Enable USB Devices:** A selection dropdown showing 'All' (selected), 'Approved', and 'None'.
- Approved USB Devices:** A table with columns: Select, Volume Name, Manufacturer, Product, Free Space, Used Space, Total Space. A 'Remove' button is located below the table.
- Available USB Devices:** A table with columns: Select, Volume Name, Manufacturer, Product, Free Space, Used Space, Total Space. An 'Add' button is located below the table.
- Action Buttons:** 'Apply Changes' and 'Refresh List' buttons.
- Other Buttons:** A large 'Safely Remove Device' button at the bottom.


At the bottom of the page, a copyright notice reads: © - Technicolor - 2013.

Fig.2-41 Gateway/USB/Approved Devices

3. Storage Basic

This page shows the status of the USB folders shared over the network.

Basic option defines shared files in all approved devices and specified folders or only specified folders. You can edit Shared Network Folders and observe the detail of folders.

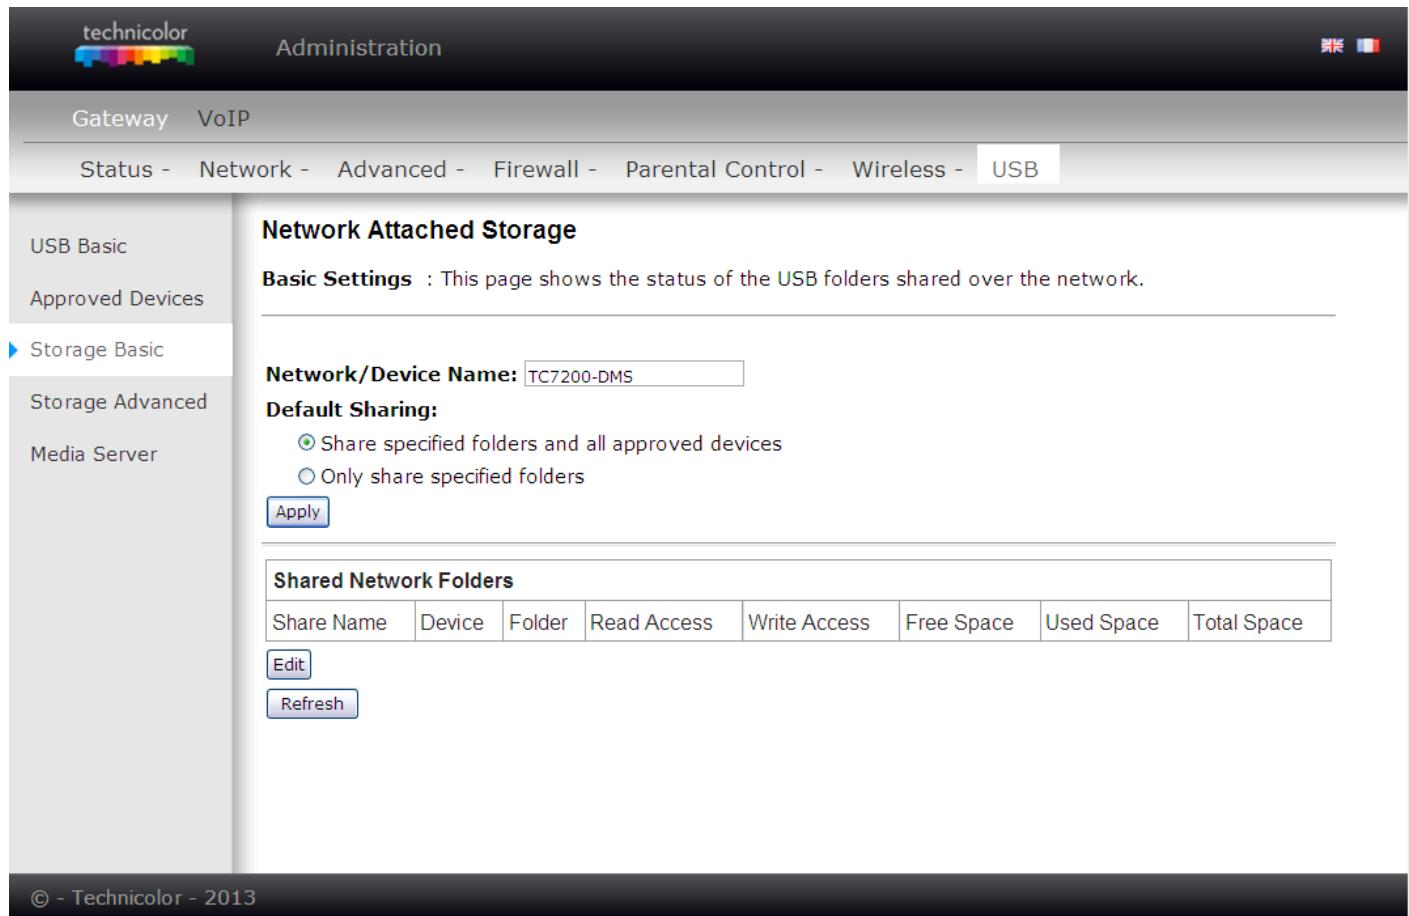

The screenshot shows the Technicolor Administration interface with the following details:

- Header:** technicolor, Administration, UK, FR
- Top Navigation:** Gateway, VoIP, Status - Network - Advanced - Firewall - Parental Control - Wireless - **USB**
- Left Sidebar:**
 - USB Basic
 - Approved Devices
 - ▶ Storage Basic
 - Storage Advanced
 - Media Server
- Content Area:**

Network Attached Storage

Basic Settings : This page shows the status of the USB folders shared over the network.

Network/Device Name: TC7200-DMS

Default Sharing:

 - Share specified folders and all approved devices
 - Only share specified folders

Buttons: Apply, Edit, Refresh


Share Name	Device	Folder	Read Access	Write Access	Free Space	Used Space	Total Space
- Footer:** © - Technicolor - 2013

Fig.2-42 Gateway/USB/Storage Basic

4. Storage Advanced

This page shows the status of the folders shared over the network.

Advanced option provides FTP option to share files as a FTP server.

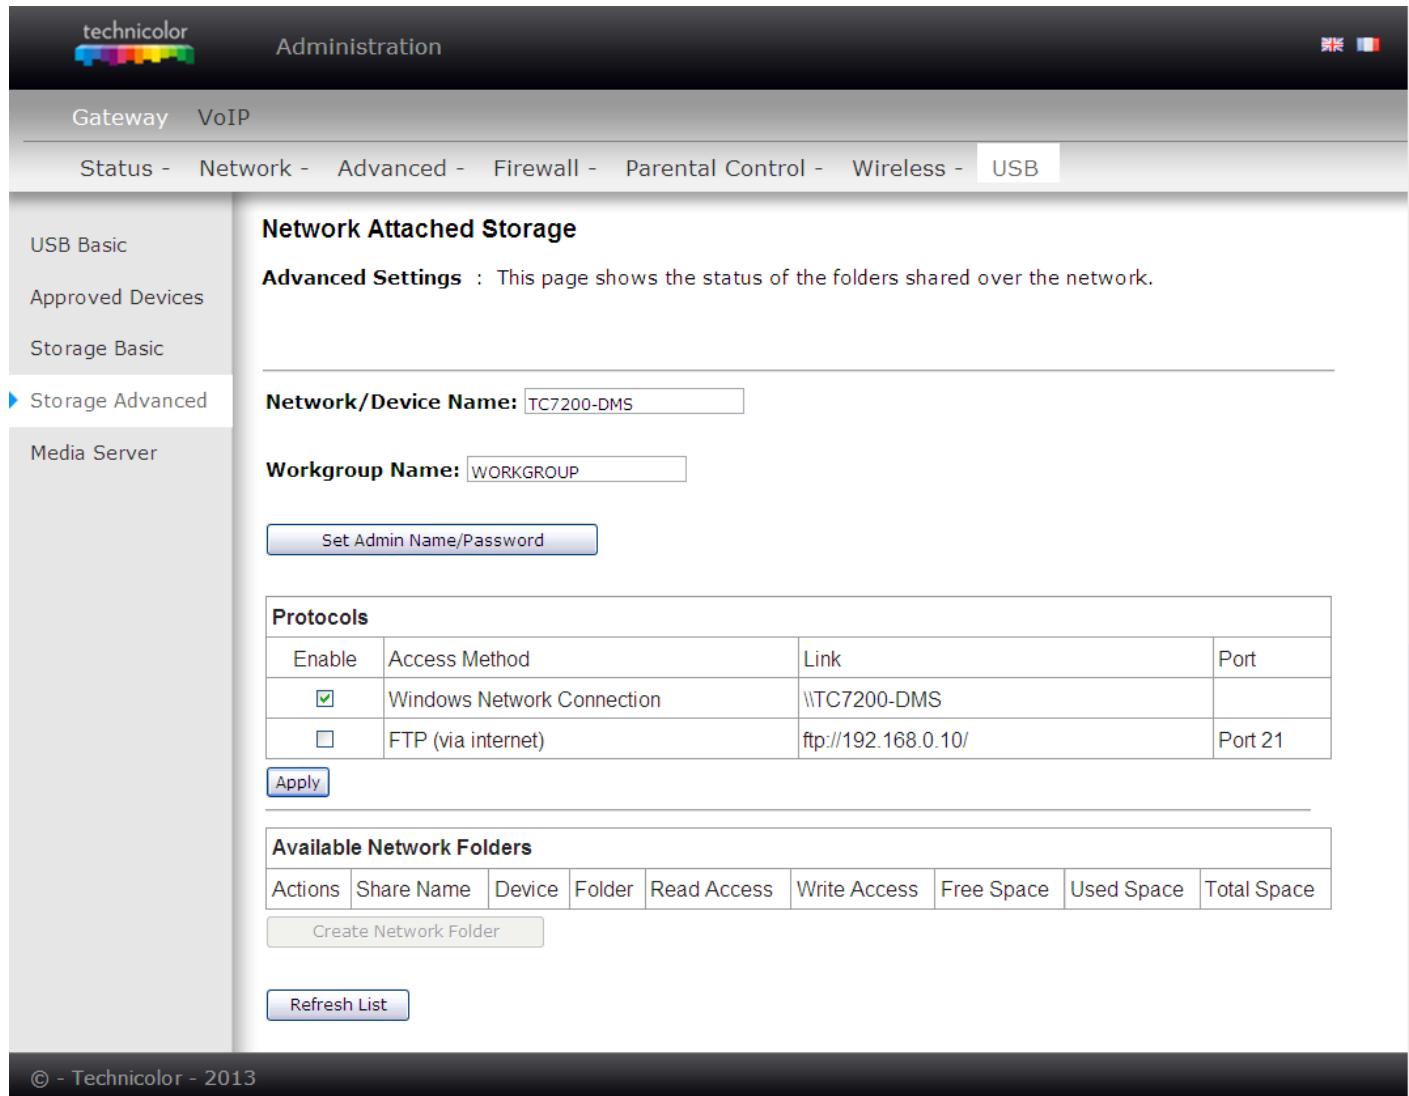

The screenshot shows the 'Administration' interface of a Technicolor device. The top navigation bar includes links for 'Gateway', 'VoIP', 'Status', 'Network', 'Advanced' (which is currently selected), 'Firewall', 'Parental Control', 'Wireless', and 'USB'. The left sidebar lists 'USB Basic', 'Approved Devices', 'Storage Basic', '▶ Storage Advanced' (selected), and 'Media Server'. The main content area is titled 'Network Attached Storage' and contains the following information:

- Advanced Settings :** This page shows the status of the folders shared over the network.
- Network/Device Name:** TC7200-DMS
- Workgroup Name:** WORKGROUP
- Set Admin Name/Password** button
- Protocols** table:

Enable	Access Method	Link	Port
<input checked="" type="checkbox"/>	Windows Network Connection	\TC7200-DMS	
<input type="checkbox"/>	FTP (via internet)	ftp://192.168.0.10/	Port 21
- Apply** button
- Available Network Folders** table:

Actions	Share Name	Device	Folder	Read Access	Write Access	Free Space	Used Space	Total Space
Create Network Folder								
- Refresh List** button

At the bottom left, it says © - Technicolor - 2013.

Fig.2-43 Gateway/USB/Storage Advanced

5. Media Server

This page controls configuration and scanning of the cable modem's media server.

Choose Scan all Files will scan your approved USB devices for sharing files. Scan Files by Type for specific file type or all of types for sharing. Choose file types from **Available File Types** to **Selected File Types**.

Media Server

Configuration : This page controls configuration and scanning of the cable modem's media server.

Basic Settings

Media Server Enabled Disabled

Media Server Name

Scan Settings


Scanning Method Scan All Files Scan Files By Type

Available File Types				Selected File Types			
Video	Audio	Image	Other	Video	Audio	Image	Other
3g2 3gp2 asf avc avi bin divx dv flv hdmov iso m1v m2t m2ts m2v m4p m4v mpeg mjpe mkv mov mp2p mp2t mp2v mp4 mp4ps mpe mpeg mpeg2 mpeg4 mpg mpg2 mpg4 ogm qt rmv	3gp aac ac3 aif aiff at3p au cda dts flac l16 lpcm m4a mid mka mp1 mp2 mp3 mp4 mpc ogg pcm ra ram rm rmi snd wav wave wma	bmp gif ico jpe jpeg jpg pcd png pnm ppm qtf qtif tif tiff	asx bup dkx idx ifo m3u mpl pjs pls psb scr srt ssa stl sub tts vsf zeg				
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Video >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Audio >>"/>			
<input type="button" value="Selected >"/> <input type="button" value="All Image >>"/>				<input type="button" value="Selected >"/> <input type="button" value="All Other >>"/>			
<input type="button" value="Selected >"/> <br							

VoIP – Basic Web Page Group

1. Basic LAN

This page displays the basic LAN status of this device, including the downstream and upstream status, device information, and interface parameters. You can select specific interface from the Interface Name drop-down menu...

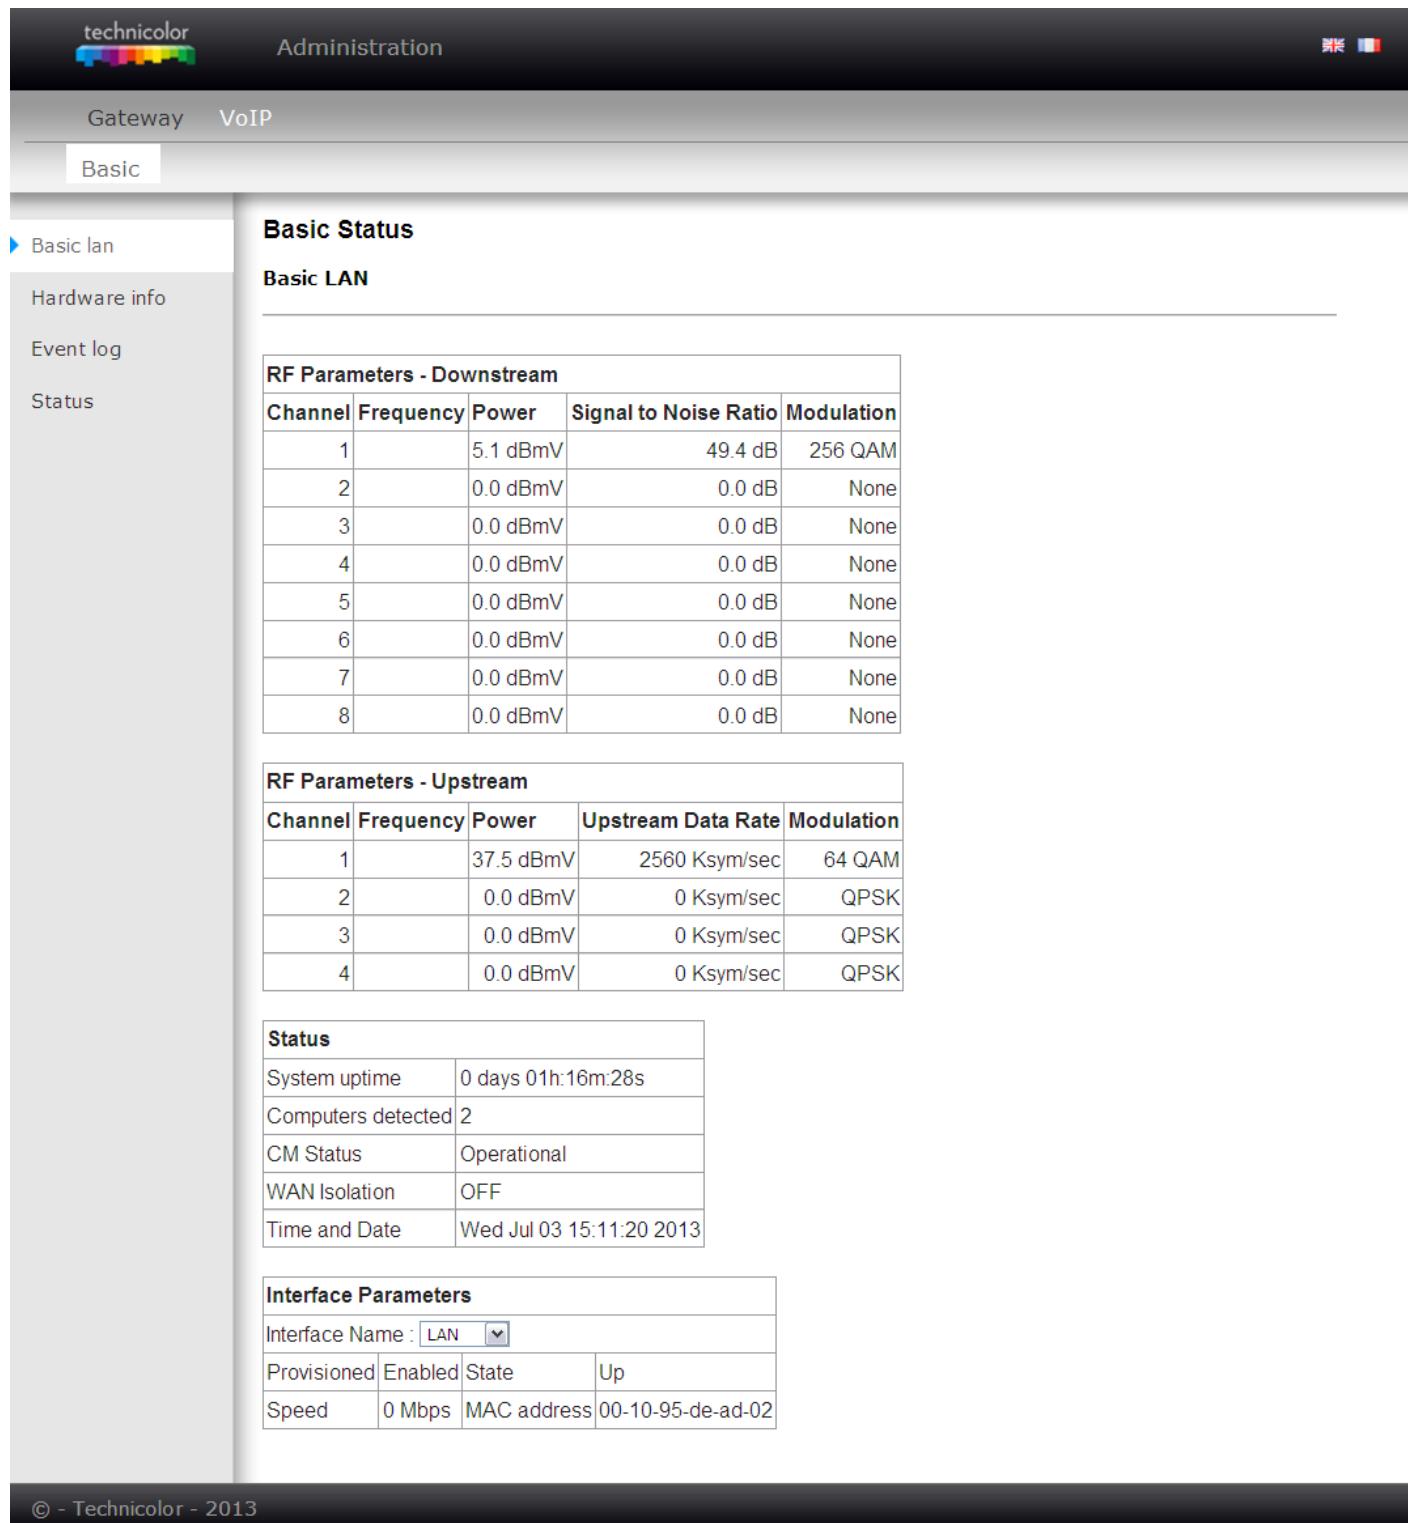

The screenshot shows the 'Basic' tab selected in the navigation bar. The left sidebar includes links for Basic LAN, Hardware info, Event log, and Status.

Basic Status

Basic LAN

Channel	Frequency	Power	Signal to Noise Ratio	Modulation
1		5.1 dBmV	49.4 dB	256 QAM
2		0.0 dBmV	0.0 dB	None
3		0.0 dBmV	0.0 dB	None
4		0.0 dBmV	0.0 dB	None
5		0.0 dBmV	0.0 dB	None
6		0.0 dBmV	0.0 dB	None
7		0.0 dBmV	0.0 dB	None
8		0.0 dBmV	0.0 dB	None

Channel	Frequency	Power	Upstream Data Rate	Modulation
1		37.5 dBmV	2560 Ksym/sec	64 QAM
2		0.0 dBmV	0 Ksym/sec	QPSK
3		0.0 dBmV	0 Ksym/sec	QPSK
4		0.0 dBmV	0 Ksym/sec	QPSK

Status	
System uptime	0 days 01h:16m:28s
Computers detected	2
CM Status	Operational
WAN Isolation	OFF
Time and Date	Wed Jul 03 15:11:20 2013

Interface Parameters			
Interface Name :	LAN	<input type="button" value="▼"/>	
Provisioned	Enabled	State	Up
Speed	0 Mbps	MAC address	00-10-95-de-ad-02

2. Hardware Info

The hardware Info is displayed on this page.

The screenshot shows the 'Hardware Info' section of the Technicolor VoIP administration interface. The left sidebar includes links for 'Basic', 'Basic lan', 'Event log', and 'Status'. The main content area displays three tables: 'System' (HW Revision: 1.0, VENDOR: Technicolor, etc.), 'MTA Hardware Information' (Mta Serial Number: 111101), and 'Software Build and Revision' (Firmware Name: TC7200.20-DD.01.01-130528-F-1C1.bin, Firmware Build Time: 11:40:31 Tue May 28 2013).

System			
HW Revision	1.0	VENDOR	Technicolor
BOOT Revision	2.4.0	SW Revision	STDD.01.01
MODEL	TC7200.20	Software Version	STDD.01.01
Serial Number	111101		


MTA Hardware Information	
Mta Serial Number	111101

Software Build and Revision	
Firmware Name	TC7200.20-DD.01.01-130528-F-1C1.bin
Firmware Build Time	11:40:31 Tue May 28 2013

Fig. 2-46 VoIP\Basic\Hardware Info

3. Event Log


The Docsis and PacketCable event logs are displayed on this web page.

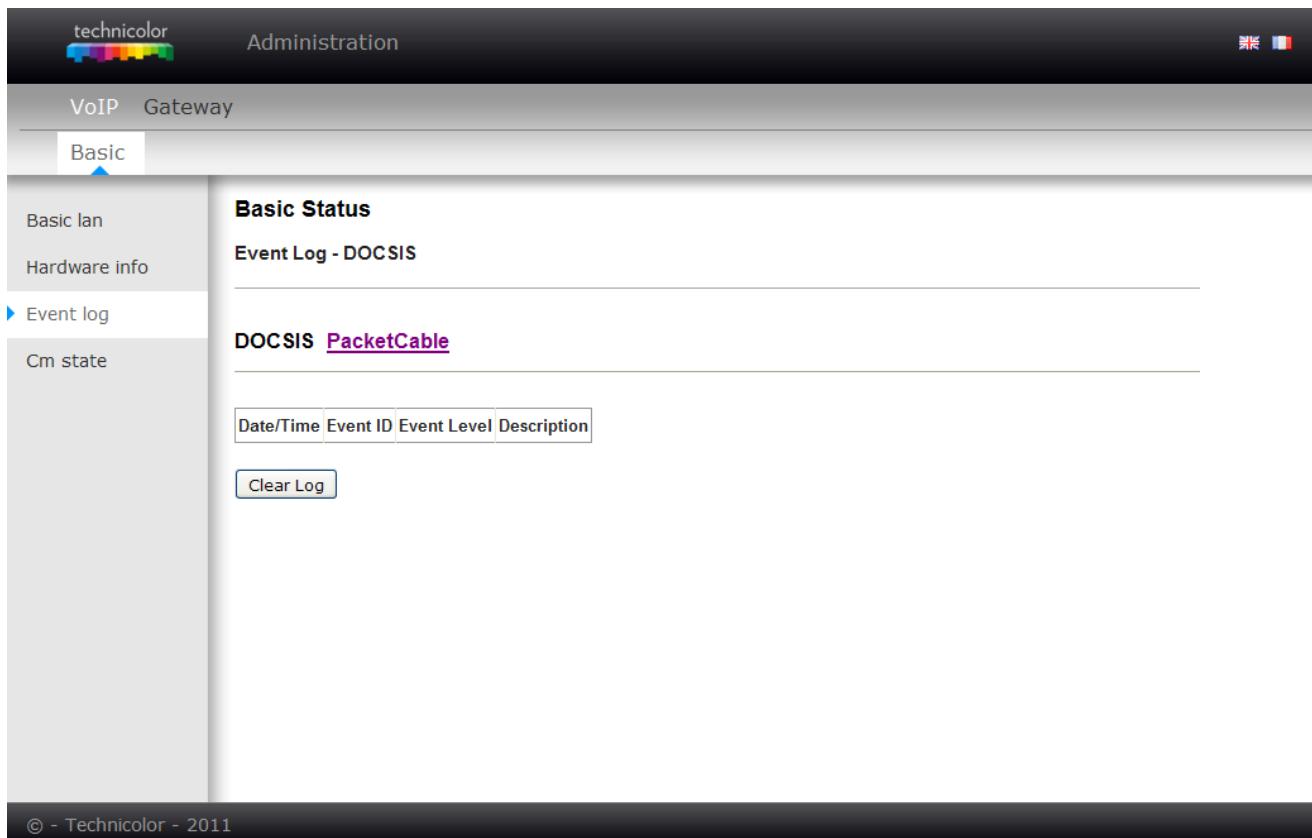

This screenshot shows the 'Event Log - DOCSIS' section of the Technicolor VoIP gateway administration interface. The left sidebar has 'Event log' selected under the 'Basic' category. The main area displays the 'Basic Status' and 'DOCSIS' sections. The 'DOCSIS' section contains a table header with columns: Date/Time, Event ID, Event Level, and Description. A 'Clear Log' button is located below the table.

Date/Time	Event ID	Event Level	Description

Fig. 2-47 VoIP\Basic\Event log\DOCSIS

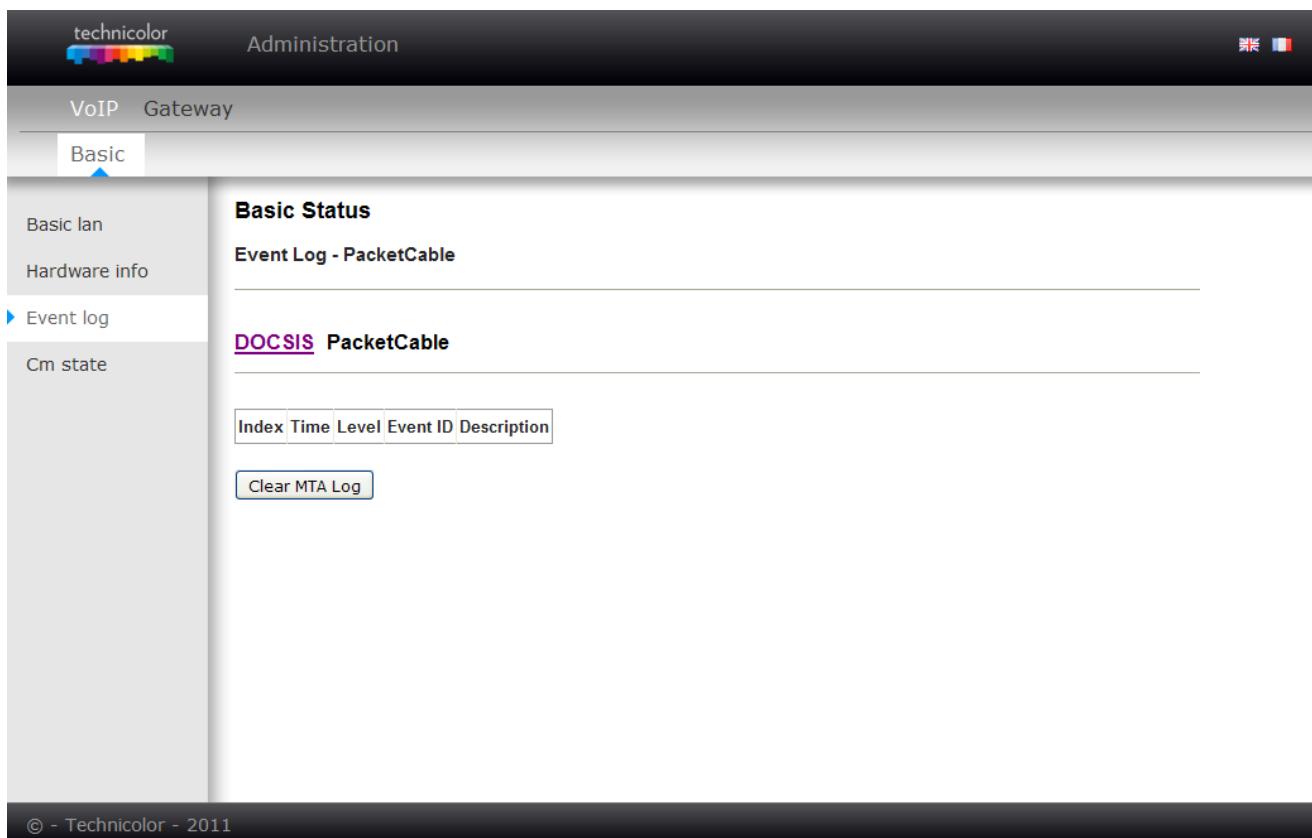


This screenshot shows the 'Event Log - PacketCable' section of the Technicolor VoIP gateway administration interface. The left sidebar has 'Event log' selected under the 'Basic' category. The main area displays the 'Basic Status' and 'DOCSIS' sections. The 'DOCSIS' section contains a table header with columns: Index, Time, Level, Event ID, and Description. A 'Clear MTA Log' button is located below the table.

Index	Time	Level	Event ID	Description

Fig. 2-48 VoIP\Basic\Event log\PacketCable

4. CM State

This page shows the current state of the cable modem.

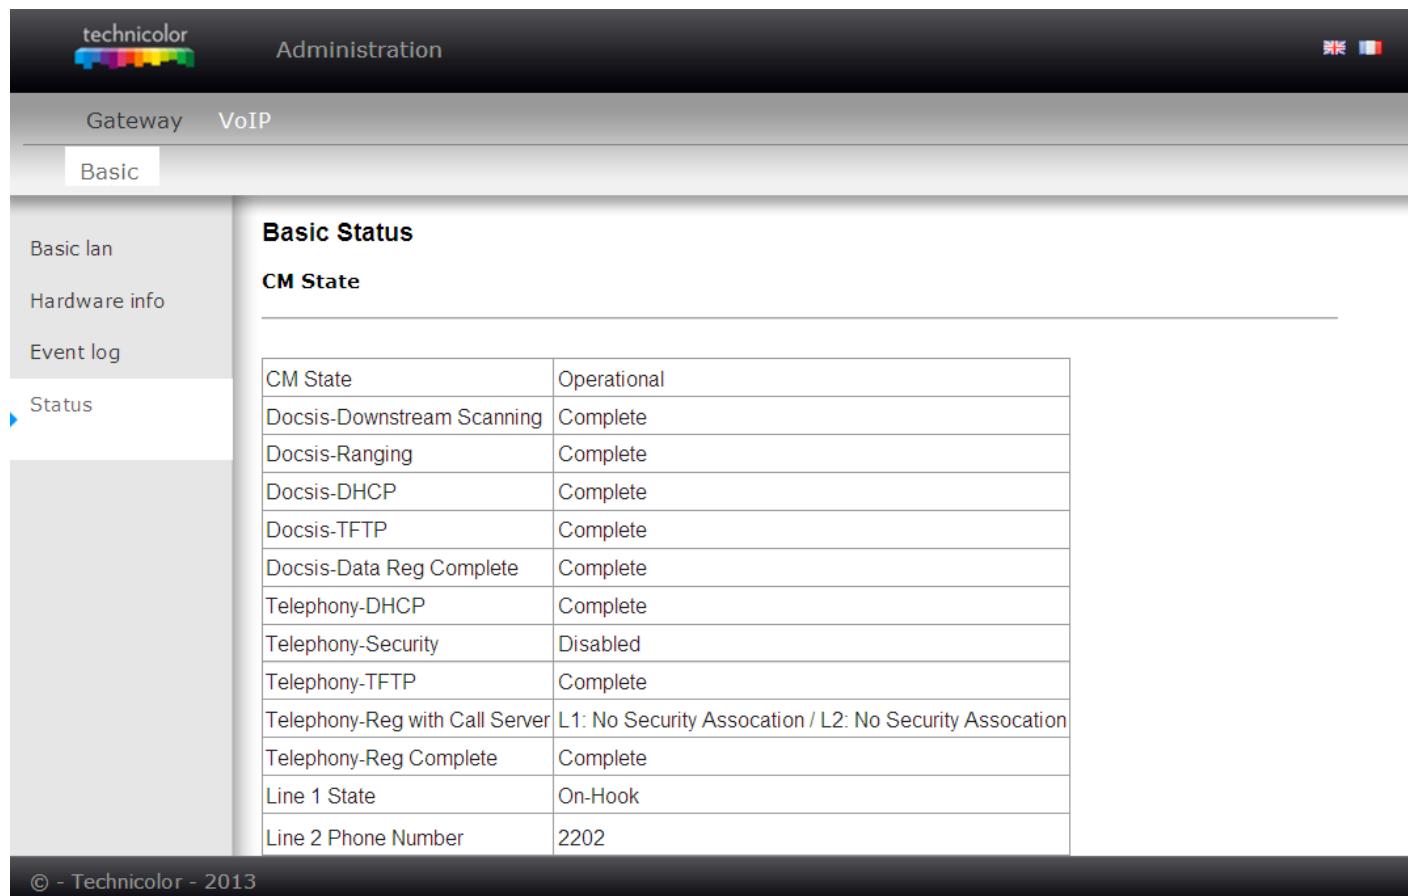

Administration

Gateway VoIP

Basic

Basic lan

Hardware info

Event log

Status

Basic Status

CM State

CM State	Operational
Docsis-Downstream Scanning	Complete
Docsis-Ranging	Complete
Docsis-DHCP	Complete
Docsis-TFTP	Complete
Docsis-Data Reg Complete	Complete
Telephony-DHCP	Complete
Telephony-Security	Disabled
Telephony-TFTP	Complete
Telephony-Reg with Call Server	L1: No Security Association / L2: No Security Association
Telephony-Reg Complete	Complete
Line 1 State	On-Hook
Line 2 Phone Number	2202

© - Technicolor - 2013

Fig. 2-49 VoIP\Basic\CM state

CHAPTER 3: NETWORKING

Communications

Data communication involves the flow of packets of data from one device to another. These devices include personal computers, Ethernet, cable modems, digital routers and switches, and highly integrated devices that combine functions, like the Wireless Cable Gateway.

The gateway integrates the functionality often found in two separate devices into one. It's both a cable modem and an intelligent wireless voice gateway networking device that can provide a host of networking features, such as NAT and firewall. Fig.3-1 illustrates this concept, with the cable modem (CM) functionality on the left, and networking functionality on the right. In this figure, the numbered arrows represent communication based on source and destination, as follows:

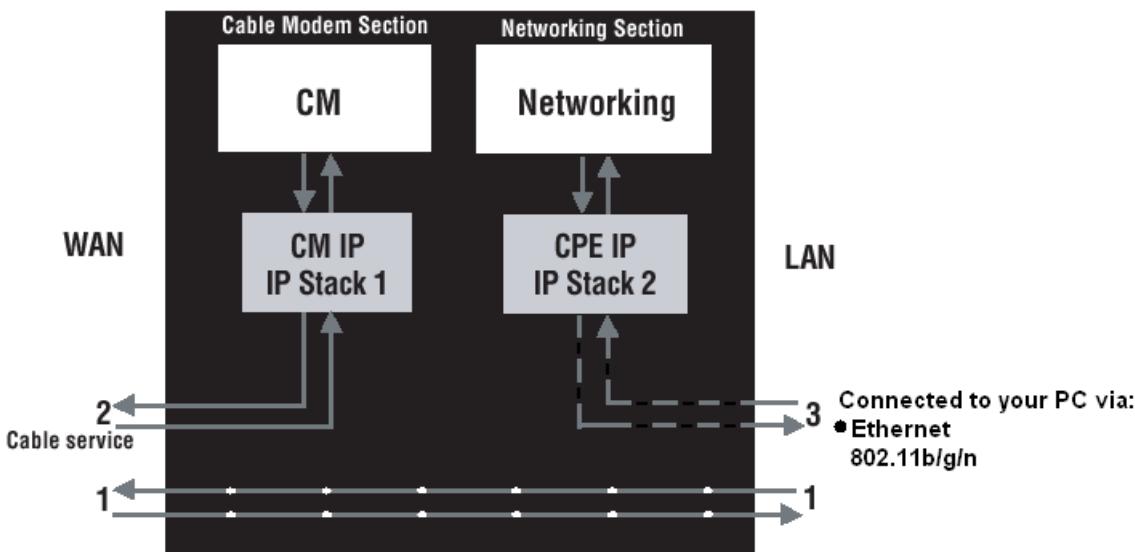


Fig.3-1 Communication between your PCs and the network side

Type of Communication

1. Communication between the Internet and your PCs

Example: The packets created by your request for a page stored at a web site, and the contents of that page sent to your PC.

2. Communication between your cable company and the cable modem side

Example: When your cable modem starts up, it must initialize with the cable company, which requires the cable company to communicate directly with the cable modem itself.

3. Communication between your PCs and the networking side

Example: The Wireless Cable Gateway offers a number of built-in web pages which you can use to configure its networking side; when you communicate with the networking side, your communication is following this path. Each packet on the Internet addressed to a PC in your home travels from the Internet down-stream on the cable company's system to the WAN side of your Wireless Cable Gateway. There it enters the Cable Modem section, which inspects the packet, and based on the results, proceeds to either forward or block the packet from proceeding on to the Networking section. Similarly, the Networking section then decides whether to forward or block the packet from proceeding on to your PC. Communication from your home device to an Internet device works similarly, but in reverse, with the packet traveling upstream on the cable system.

Cable Modem (CM) Section

The cable modem (or CM) section of your gateway uses DOCSIS or EURO-DOCSIS Standard cable modem technology. DOCSIS or EURO-DOCSIS specifies that TCP/IP over Ethernet style data communication be used between the WAN interface of your cable modem and your cable company.

A DOCSIS or EURO-DOCSIS modem, when connected to a Cable System equipped to support such modems, performs a fully automated initialization process that requires no user intervention. Part of this initialization configures the cable modem with a CM IP (Cable Modem Internet Protocol) address, as shown in Figure 3-2, so the cable company can communicate directly with the CM itself.

Networking Section

The Networking section of your gateway also uses TCP/IP (Transmission Control Protocol/ Internet Protocol) for the PCs you connected on the LAN side. TCP/IP is a networking protocol that provides communication across interconnected networks, between computers with diverse hardware architectures and various operating systems.

TCP/IP requires that each communicating device be configured with one or more TCP/IP stacks, as illustrated by Fig.3-2. On a PC, you often use software that came with the PC or its network interface (if you purchased a network interface card separately) to perform this configuration. To communicate with the Internet, the stack must also be assigned an IP (Internet Protocol) address. 192.168.100.1 is an example of an IP address. A TCP/IP stack can be configured to get this IP address by various means, including a DHCP server, by you directly entering it, or sometimes by a PC generating one of its own.

Ethernet requires that each TCP/IP stack on the Wireless Cable Gateway also have associated with it an Ethernet MAC (Media Access Control) address. MAC addresses are permanently fixed into network devices at the time of their manufacture. 00:90:64:12:B1:91 is an example of a MAC address.

Data packets enter and exit a device through one of its network interfaces. The gateway offers Ethernet and 802.11b/g/n wireless network interfaces on the LAN side and the DOCSIS network interface on the WAN side.

When a packet enters a network interface, it is offered to all the TCP/IP stacks associated with the device side from which it entered. But only one stack can accept it — a stack whose configured Ethernet address matches the Ethernet destination address inside the packet. Furthermore, at a packet's final destination, its destination IP address must also match the IP address of the stack.

Each packet that enters a device contains source MAC and IP addresses telling where it came from, and destination MAC and IP addresses telling where it is going to. In addition, the packet contains all or part of a message destined for some application that is running on the destination device. IRC used in an Internet instant messaging program, HTTP used by a web browser, and FTP used by a file transfer program are all examples of applications. Inside the packet, these applications are designated by their port number. Port 80, the standard HTTP port, is an example of a port number.

The Networking section of the router performs many elegant functions by recognizing different packet types based upon their contents, such as source and destination MAC address, IP address, and ports.

Three Networking Modes

Your gateway can be configured to provide connectivity between your cable company and your home LAN in any one of three Networking Modes: CM, RG, and CH. This mode setting is under the control of your cable company, who can select the mode to match the level of home networking support for which you have subscribed. All units ship from the factory set for the RG mode, but a configuration file which the cable company sends the cable modem section during its initialization can change it.

Cable Modem (CM) Mode

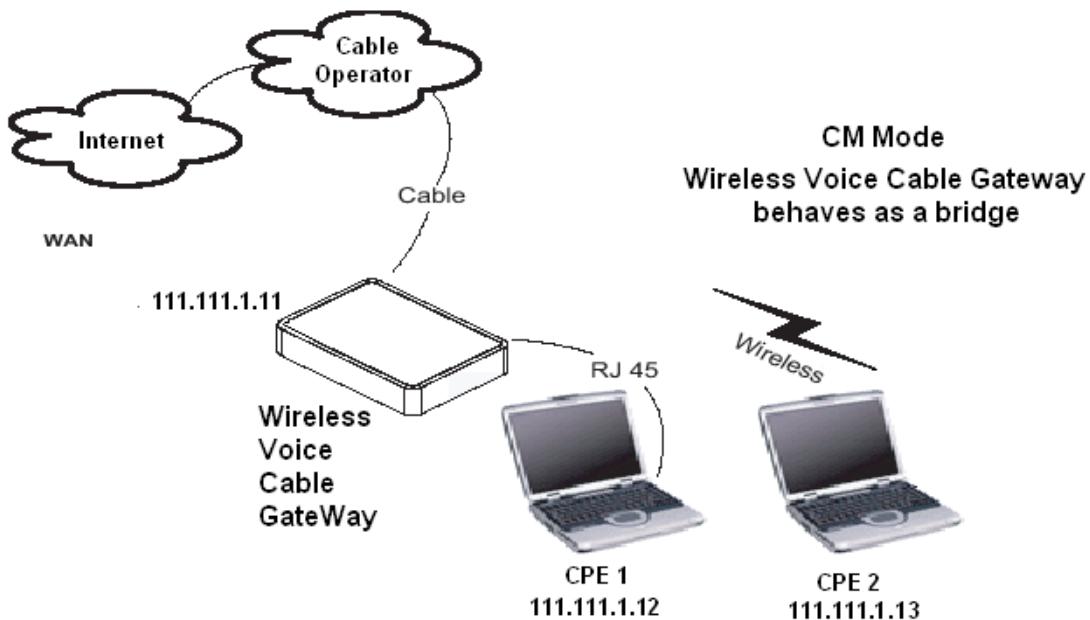


Fig. 3-2 Cable Modem Mode

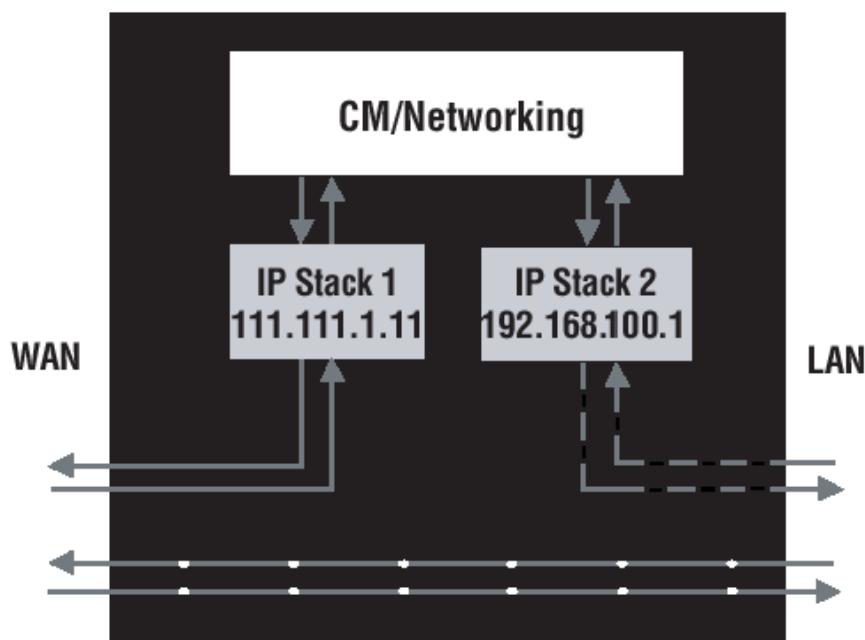


Fig. 3-3 Two IP stacks are activated in cable modem mode

CM (Cable Modem) Mode provides basic home networking. In this mode, two IP stacks are active:

- IP Stack 1 - for use by the cable company to communicate with the cable modem section only. This stack receives its IP address from the cable company during CM initialization. It uses the MAC address printed on the label attached to the Wireless Cable gateway.
- IP Stack 2 - for use by you, the end user, to communicate with the cable modem and Networking sections, to access the internal web page diagnostics and configuration. This stack uses a fixed IP address: 192.168.100.1. It uses a MAC address 00:10:95:FF:FF:FE.

With CM Mode, your cable company must provide one IP address for the CM section, plus one for each PC you connect from their pool of available addresses. Your cable company may have you or your installer manually enter these assigned addresses into your PC, or use a DHCP Server to communicate them to your PCs, or use a method that involves you entering host names into your PCs.

Note that in CM Mode, packets passing to the Internet to/from your PCs do not travel through any of the IP stacks; instead they are directly bridged between the WAN and LAN sides.

Residential Gateway (RG) Mode

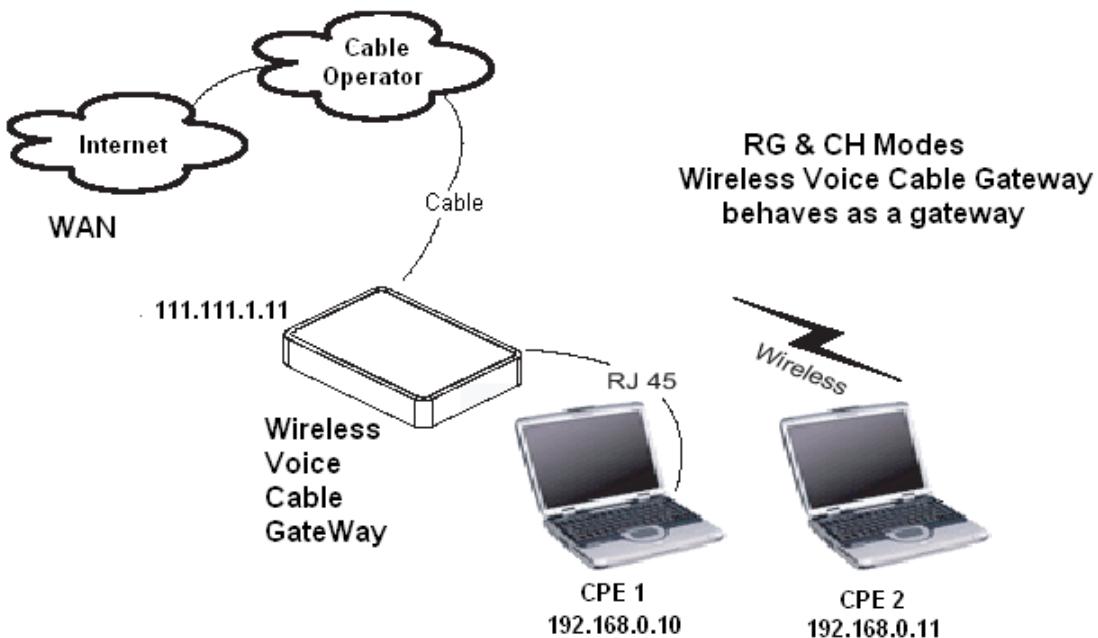


Fig. 3-4 Residential Gateway Mode

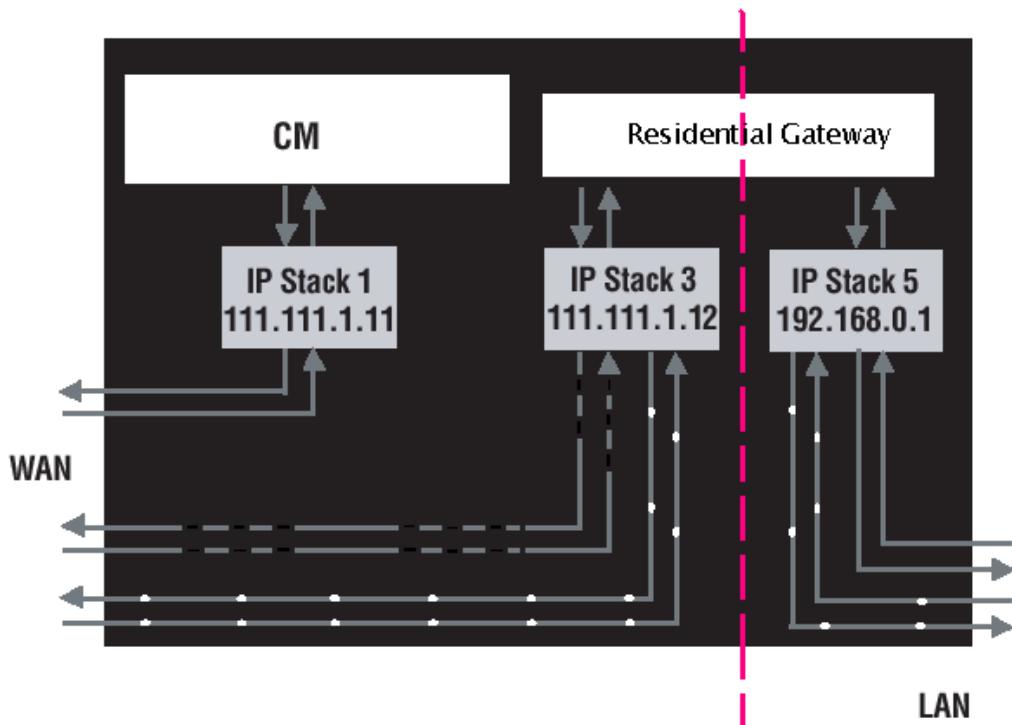


Fig. 3-5 Three IP stacks are activated in cable modem mode

RG (Residential Gateway) Mode provides basic home networking plus NAT (Network Address Translation). In this mode, three IP stacks are active:

- IP Stack 1 - for use by the cable company to communicate with the Cable Modem section only. This stack receives its IP address from the cable company during CM initialization. It uses the MAC address printed on the label attached to the Wireless Cable Gateway.
- IP Stack 3 - for use by you to remotely (i.e. from somewhere on the WAN side, such as at your remote

workplace) communicate with the Cable Modem and Networking sections, to remotely access the internal web page diagnostics and configuration. This stack is also used by your cable company to deliver packets between the Internet and the gateway's networking section so they can be routed to/from your PCs. This stack requires an IP address assigned by the cable company from their pool of available addresses. Your cable company may have you or your installer manually enter assigned addresses into your gateway, or use a DHCP Server to communicate them, or use a method that involves you entering host names. This stack uses a MAC address of MAC label + 2 (the MAC label is found on the bottom of the unit). E.g., if the MAC address is 00:90:64:12:B1:91, this MAC address would be 00:90:64:12:B1:93.

- IP Stack 5 - for use by you to locally (i.e. from somewhere on the LAN side in your home) communicate with the Cable Modem and Networking sections, to access the internal web page diagnostics and configuration. This stack is also used by the gateway's networking section to route packets between the gateway's Networking section and your PCs. This stack uses a fixed IP address: 192.168.0.1. It uses a MAC address of MAC label + 4 (the MAC label is found on the bottom of the unit). E.g., if the MAC address is 00:90:64:12:B1:91, this MAC address would be 00:90:64:12:B1:95.

With RG Mode, your cable company must provide one IP address for the CM section, plus one for the Networking section, from their pool of available addresses. With RG Mode, each PC you connect gets an IP address from a DHCP Server that is part of the Networking section of the gateway.

CHAPTER 4: ADDITIONAL INFORMATION

Frequently Asked Questions

Q. What if I don't subscribe to cable TV?

A. If cable TV is available in your area, data and voice service may be made available with or without cable TV service. Contact your local cable company for complete information on cable services, including high-speed internet access.

Q. How do I get the system installed?

A. Professional installation from your cable provider is strongly recommended. They will ensure proper cable connection to the modem and your computer. However, your retailer may have offered a self installation kit, including the necessary software to communicate with your cable ISP.

Q. Once my Wireless Voice Gateway is connected, how do I get access to the Internet?

A. Your local cable company provides your internet service*, offering a wide range of services including email, chat, and news and information services, and a connection to the World Wide Web.

Q. It seems that the wireless network is not working

A. Check the Wireless LED on the front panel. If it is no lighted, press on the WPS button shortly, less than 1 second, on the side of the modem, and then check again the Wireless LED. If it is lighted, then the Wireless transmission is enabled.

Q. Can I watch TV, surf the Internet, and talk to my friends through the Wireless Voice Gateway at the same time?

A. Absolutely!

Q. What do you mean by "Broadband?"

A. Simply put, it means you'll be getting information through a "bigger pipe," with more bandwidth, than a standard phone line can offer. A wider, "broader" band means more information, more quickly.

Q. What is Euro-DOCSIS and what does it mean?

A. "Data over Cable Service Interface Specifications" is the industry standard that most cable companies are adopting as they upgrade their systems. Should you ever decide to move, the Wireless Voice Gateway will work with all upgraded cable systems that are Euro-DOCSIS-compliant.

Q. What is Euro-PacketCable and what does it mean?

A. Euro-PacketCable is the industry standard for telephony services that most cable companies are adopting as they upgrade their systems. Should you ever decide to move, the Wireless Voice Gateway will work with all upgraded cable systems that are Euro-PacketCable compliant.

Q. What is Xpress Technology and what does it mean?

A. It is one of the popular performance-enhancing Wi-Fi technologies, designed to improve wireless network efficiency and boost throughput. It is more efficient in mixed environments, and it can work with 802.11a/b/g networks. When Xpress is turned on, aggregate throughput (the sum of the individual throughput speeds of each client on the network) can improve by **up to 27%** in 802.11g-only networks, and **up to 75%** in mixed networks comprised of 802.11g and 802.11b standard equipment. The

technology achieves higher throughput by re-packaging data, reducing the number of overhead control packets, so that more useful data can be sent during a given amount of time.

* Monthly subscription fee applies.

** Additional equipment required. Contact your Cable Company and ISP for any restrictions or additional fees.

General Troubleshooting

You can correct most problems you have with your product by consulting the troubleshooting list that follows.

I can't access the internet.

- Check all of the connections to your Wireless Voice Gateway.
- Your Ethernet card may not be working. Check each product's documentation for more information.
- The Network Properties of your operating system may not be installed correctly or the settings may be incorrect. Check with your ISP or cable company.

I can't get the modem to establish an Ethernet connection.

- Even new computers don't always have Ethernet capabilities – be sure to verify that your computer has a properly installed Ethernet card and the driver software to support it.
- Check to see that you are using the right type of Ethernet cable.

The modem won't register a cable connection.

- If the modem is in Initialization Mode, the INTERNET light will be flashing. Call your Cable Company if it has not completed this 5-step process within 30 minutes, and note which step it is getting stuck on.
- The modem should work with a standard RG-6 coaxial cable, but if you're using a cable other than the one your Cable Company recommends, or if the terminal connections are loose, it may not work. Check with your Cable Company to determine whether you're using the correct cable.
- If you subscribe to video service over cable, the cable signal may not be reaching the modem. Confirm that good quality cable television pictures are available to the coaxial connector you are using by connecting a television to it. If your cable outlet is "dead", call your Cable Company.
- Verify that the Cable Modem service is Euro-DOCSIS compliant and PacketCable compliant by calling your cable provider.

I don't hear a dial tone when I use a telephone.

- Telephone service is not activated. If the rightmost light on the Wireless Voice Gateway stays on while others flash, check with your TSP or cable company. If the Wireless Voice Gateway is connected to existing house telephone wiring, make sure that another telephone service is not connected. The other service can normally be disconnected at the Network Interface Device located on the outside of the house.
- If using the second line on a two-line telephone, use a 2-line to 1-line adapter cable.

For more Usage and Troubleshooting Tips use the web site links provided on the CD-ROM:

www.technicolor.com

Service Information

If you purchased or leased your Wireless Voice Gateway directly from your cable company, then warranty service for the Digital Cable Modem may be provided through your cable provider or its authorized representative. For information on 1) Ordering Service, 2) Obtaining Customer Support, or 3) Additional Service Information, please contact your cable company. If you purchased your Wireless Voice Gateway from a retailer, see the enclosed warranty card.

Glossary

10/100/1000 BaseT – Unshielded, twisted pair cable with an RJ-45 connector, used with Ethernet LAN (Local Area Network). “10/100/1000” indicates speed (10/100/1000 BaseT), “Base” refers to baseband technology, and “T” means twisted pair cable.

Authentication - The process of verifying the identity of an entity on a network.

DHCP (Dynamic Host Control Protocol) – A protocol which allows a server to dynamically assign IP addresses to workstations on the fly.

Ethernet adapters – A plug-in circuit board installed in an expansion slot of a personal computer. The Ethernet card (sometimes called a Network Interface Card , network adapter or NIC) takes parallel data from the computer, converts it to serial data, puts it into a packet format, and sends it over the 10/100/1000 BaseT LAN cable.

DOCSIS (Data Over Cable Service Interface Specifications) – A project with the objective of developing a set of necessary specifications and operations support interface specifications for Cable Modems and associated equipment.

F Connector – A type of coaxial connector, labeled CABLE IN on the rear of the Wireless Voice Gateway that connects the modem to the cable system.

HTTP (HyperText Transfer Protocol) – Invisible to the user, HTTP is used by servers and clients to communicate and display information on a client browser.

Hub – A device used to connect multiple computers to the Wireless Voice Gateway.

IP Address – A unique, 32-bit address assigned to every device in a network. An IP (Internet Protocol) address has two parts: a network address and a host address. This modem receives a new IP address from your cable operator via DHCP each time it goes through Initialization Mode.

Key exchange - The swapping of mathematical values between entities on a network in order to allow encrypted communication between them.

MAC Address – The permanent “identity” for a device programmed into the Media Access Control layer in the network architecture during the modem’s manufacture.

NID - Network Interface Device, the interconnection between the internal house telephone wiring and a conventional telephone service provider’s equipment. These wiring connections are normally housed in a small plastic box located on an outer wall of the house. It is the legal demarcation between the subscriber’s property and the service provider’s property.

PacketCable – A project with the objective of developing a set of necessary telephony specifications and operations support interface specifications for Wireless Voice Gateways and associated equipment used over the DOCSIS based cable network.

PSTN (Public Switched Telephone Network) – The worldwide voice telephone network which provides dial tone, ringing, full-duplex voice band audio and optional services using standard telephones.

Provisioning - The process of enabling the Media Terminal Adapter (MTA) to register and provide services over the network.

TCP/IP (Transmission Control Protocol/Internet Protocol) – A networking protocol that provides communication across interconnected networks, between computers with diverse hardware architectures and various operating systems.

TFTP - Trivial File Transfer Protocol, the system by which the Media Terminal Adapter's configuration data file is downloaded.

TSP - Telephony Service Provider, an organization that provides telephone services such as dial tone, local service, long distance, billing and records, and maintenance.

Universal Serial Bus (USB) – USB is a “plug-and-play” interface between a computer and add-on devices, such as a Wireless Voice Gateway.

Xpress Technology - One of the popular performance-enhancing WiFi technologies, designed to improve wireless network efficiency and boost throughput. It is more efficient in mixed environments, and it can work with 802.11a/b/g networks.